

FOUNDRY LOGO AND MELT
DATE TO APPEAR HERE

UNLESS OTHERWISE STATED:

- | | | | | |
|------|---|------|-------------------------------------|------------------|
| (1) | ALL DIMENSIONS IN MILLIMETRES | (7) | ALL HOLE CENTRES TO BE WITHIN | OF TRUE POSITION |
| (2) | ALL LINEAR DIMENSIONS TO ± 0.1 (CAST) | (8) | SURFACES MARKED TO BE MACHINED | ON TRUE POSITION |
| (3) | ALL ANGULAR DIMENSIONS TO $\pm 5^\circ$ | (9) | ALLOWANCE OF | ON DIPS AND OF |
| (4) | ALL DIMENSIONS TO ± 0.1 mm | (10) | ALL GEOMETRIC TOLERANCES ARE T.I.R. | |
| (5) | REMOVE ALL SHARP EDGES | | | |
| (6) | | | | |
| (7) | | | | |
| (8) | SURFACE FINISH TO MICRO METRES | | | |
| (9) | MACHINING ALL OVER TO MICRO METRES | | | |
| (10) | | | | |

REGINA HOUSE
RING ROAD
BRAMLEY
LEEDS
WEST YORKS

ISO SYMBOLS	
⊕ POSITIONAL TOLERANCE	≡ SYMMETRY TOLERANCE
◎ CONCENTRICITY TOLERANCE	() REF DIMENSIONS ONLY
⊥ SQUARENESS TOLERANCE	□ BASIC DIMENSIONS ONLY
∥ PARALLELISM TOLERANCE	∅ DIAMETER



REF	'V'	'W'	'X'	'Y'	'Z'	'T'+0.03	'U'
24	20	48.60	117.33	M16	254	20.00	20.00
23	30	57.01	137.63	3/4"UNC	11.73"	—	—
22	20	48.60	117.33	M16	254.00	22.00	22.00
21	30	61.23	147.82	M24	320.00	22.00	22.00
20	30	68.04	164.27	7/8"UNC	14.0"	—	—
19	20	48.60	117.33	M16	254	16.00	20.00
18	30	65.61	158.40	3/4"UNC	13.5"	—	—
17	30	57.02	137.66	M20	298	22.00	20
16	30	57.40	138.58	M20	300	—	—
15	25	51.66	124.72	M20	270	30.00	20
14	20	69.84	168.61	M16	365	—	—
13	30	68.12	164.45	M20	356	—	—

PART NO. OF BASIC BASEPLATE
LESS TAPPED HOLES IS IW8D06

MATERIAL :- CAST IRON TO BS.145
GRADE 17

PROJECT :- 14250 lbs.ft. QUARTER
TURN GEARBOX

DRAWN: - RB 11-8-92	SCALE	HEAT TREATMENT	PROTECTIVE TREATMENT
CHECKED: -	1:2		FOR CORROSION PROTECTION
BASEPLATE		IW8 D06 (SHEET 2)	

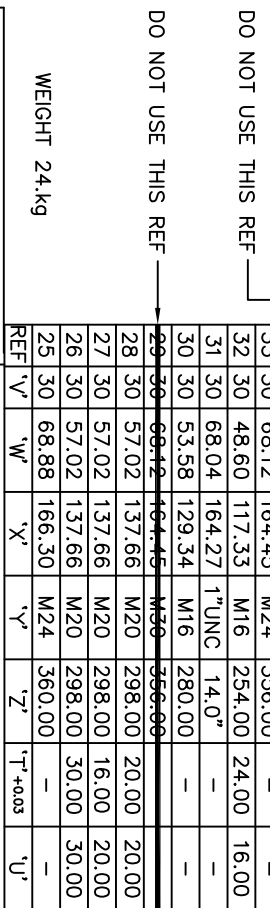
MACHINE $\nabla^{3.2}$ WHERE SHOWN ∇

(1) ALL DIMENSIONS IN MILLIMETERS	(6) ALL HOLE CENTRES TO BE WITHIN	OF TRUE POSITION
(2) ALL LINEAR DIMENSIONS TO ± 0.05	SURFACES MARKED ∇ TO BE MACHINED	AND MACHINING
(3) ALL ANGULAR DIMENSIONS TO $\pm 5^\circ$	ALLOWANCE ON DMS AND OF	ON FACES TO
(4) ALL UNSPECIFIED RADI 10mm	BE CAST ON	
(5) REMOVE ALL SHARP EDGES	(8) SURFACE FINISH TO ∇ MICRO METRES	
	(9) ALL DIMENSIONS OVER TO BE CAST	
	(10) ALL GEOMETRIC TOLERANCES ARE T.I.R.	

LESS TAPPED HOLES IS IW8D06

MATERIAL :-	CAST IRON TO BS.1452
GRADE	17
PROJECT :-	14250 lbs.ft. QUARTER TURN GEARBOX

DRAWN:- B.T.	11.6.93.	SCALE	1:2	HEAT TREATMENT	PROTECTIVE COATING FOR STORAGE
CHECKED:-					
BASEPLATE				IW8 D06 (SHEET 3)	



ROTORK GEARS
REGINA HOUSE
RING ROAD
BRAMLEY
LEEDS
WEST YORKS

UNLESS OTHERWISE STATED:	
(1) ALL DIMENSIONS IN MILLIMETRES	(6) ALL HOLE CENTRES TO BE WITHIN
(2) ALL LINEAR DIMENSIONS TO ± 0.10 (CAST)	(7) SURFACES MARKED ∇ TO BE MACHINED AND A MACHINING
(3) ALL ANGULAR DIMENSIONS TO $\pm 5^\circ$	(8) ALLOWANCE OF ON DIAS AND OF ON FACES TO
(4) ALL DIMENSIONS TO ± 0.10 (MACHINED)	(9) SURFACE FINISH TO MICRO METRES
(5) REMOVE ALL SHARP EDGES	(10) MACHINING ALL OVER TO MICRO METRES
	(11) ALL GEOMETRIC TOLERANCES ARE I.T.R.

ISO SYMBOLS	≡	SYMMETRY TOLERANCE
⊕ POSITIONAL TOLERANCE	()	REF DIMENSIONS ONLY
◎ CONCENTRICITY TOLERANCE	□	BASIC DIMENSIONS ONLY
⊥ SQUARENESS TOLERANCE	∅	DIAMETER
// PARALLELISM TOLERANCE		

[illegible]

WEIGHT 24.kg

	REF	'V'	'W'	'X'	'Y'	'Z'	'T'+0.03	'U'
50	30	51.03	123.20	5/8"UNC	10.5"	—	—	—
49	30	60.14	145.20	5/8"UNC	12.3/5"	—	—	—
48	30	58.32	140.80	3/4"UNC	12.00"	—	—	—
47	30	68.04	164.27	5/8"UNC	14.00"	—	—	—
46	30	57.02	137.66	M20	298.00	22.50	30.00	—
45	30	57.02	137.66	M20	298.00	25.00	25.00	—
44	30	68.12	164.45	M30	356.00	35.00	35.00	—
43	30	68.12	164.45	M30	356.00	20.00	20.00	—
42	30	68.12	164.45	M30	356.00	30.00	30.00	—
41	30	72.71	175.54	M30	380.00	—	—	—
40	30	68.12	164.45	M20	356.00	22.50	30.00	—
39	30	57.02	137.66	M20	298	35.00	35	—
38	30	71.69	173.07	3/4"UNC	14.75"	—	—	—

PART NO. OF BASIC BASEPLATE LESS TAPPED HOLES IS IW8D06			
MATERIAL :- CAST IRON TO BS.1452 GRADE 17	DRAWN:- B.T.	11.6.93.	
PROJECT :- 14250 lbs.-ft. QUARTER TURN GEARBOX	CHECKED:-	SCALE 1:2	HEAT TREATMENT PER DRAWING
BASEPLATE		IW8 D06 (SHEET 4)	