




LOGIC POWER STANDBY

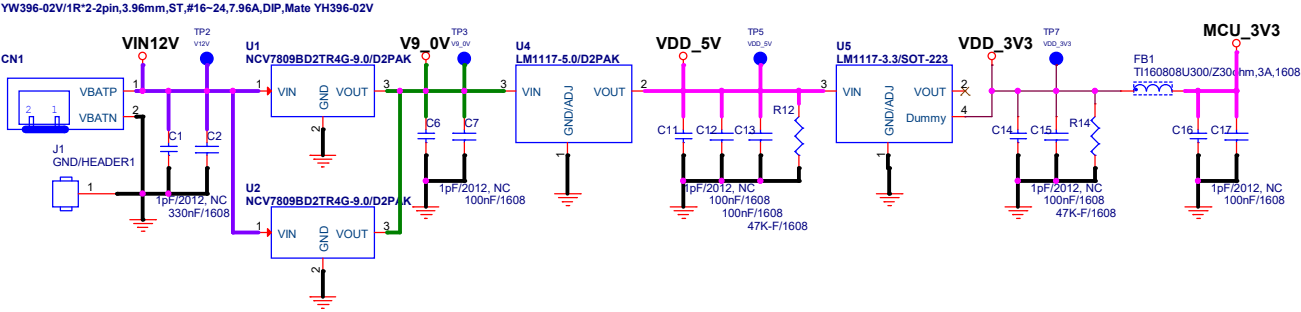

XD04 VCC

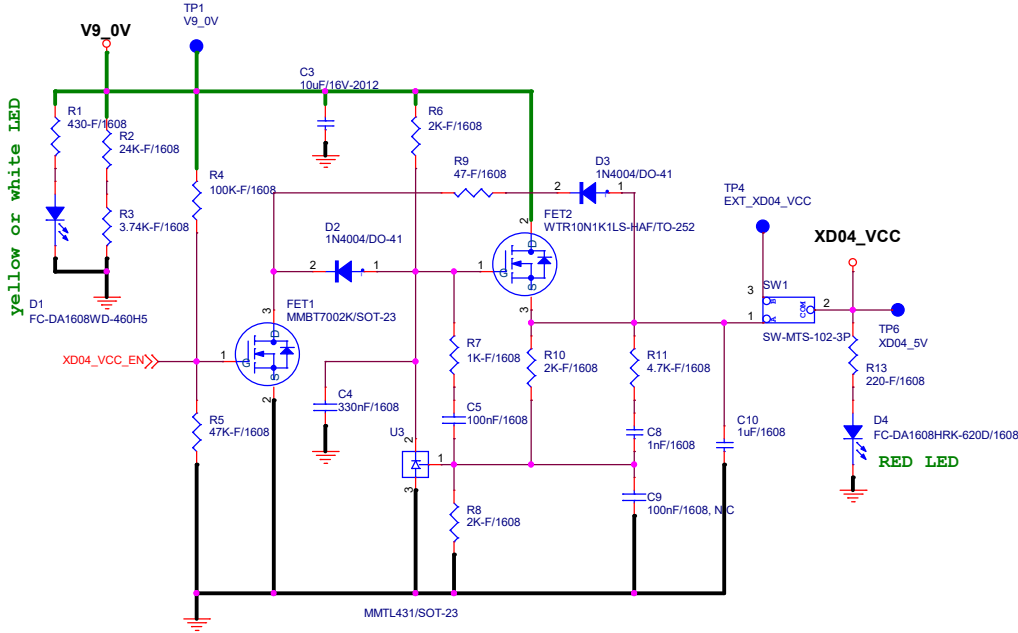


XC24 VCC

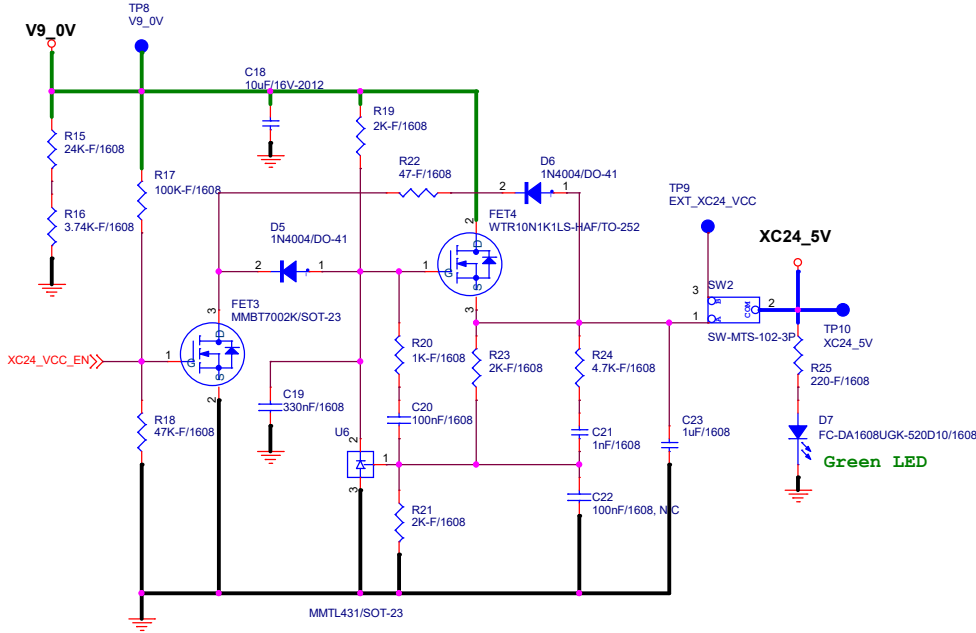




Global Technologies 주식회사 글로벌 테크놀로지			CONFIDENTIAL		Design	Check
Size	Project name	XD04, XC24 RT Board		Rev	K.D.I	K.Y.G
Custom	Page name	P1. POWER		0.0		
	Sheet	1 of 3				
	Date:	Monday, September 08, 2025				

CONFIDENTIAL

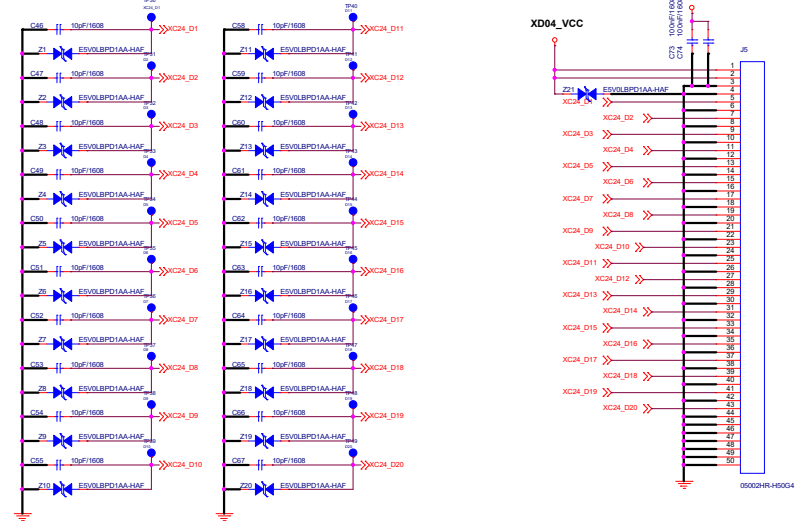

The schematic diagram illustrates the MC33216DBRISOP16 driver circuit. The top section shows a detailed circuit with an MCU_3V3 supply, capacitors C56, C57, C68, C71, and C72, and resistors R21, R22, and R23. It includes a TRS32216DBRISOP16 driver with pins EN, FORCEOFF, FORCEON, INVALID, and DOUT. The bottom section shows three alternative input configurations for the driver: KEY_1, KEY_2, and KEY_3, each using a different resistor (R243, R245, R247) and a different switch (SW25, SW27, SW28).

 Global Technologies ENTERPRISE SOLUTIONS			Design	Check
Size	Project name XDD4, XC24 RT Board	Rev	K.D.I	K.Y.G
Customer	Page name P2. XD04, XC24, MCU	0.0		
Sheet 2 of 3				
Date: Monday, September 08, 2025				

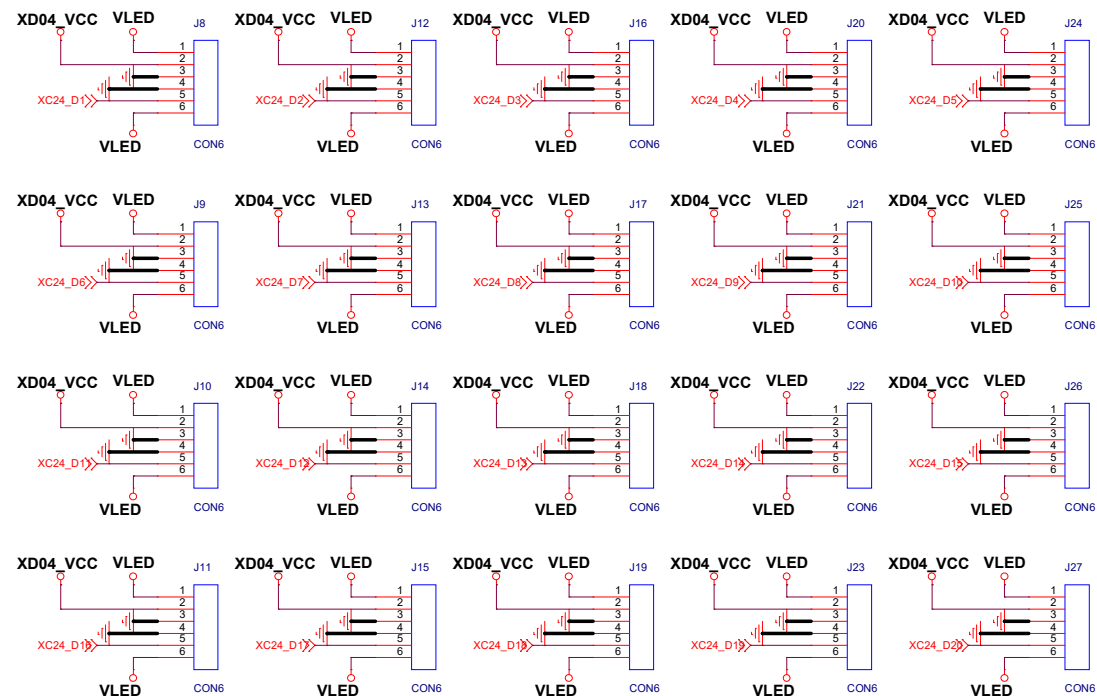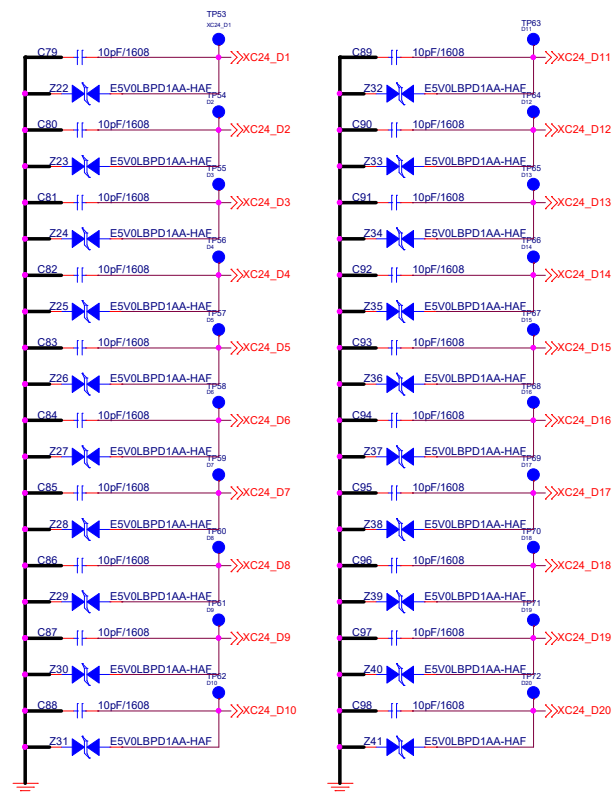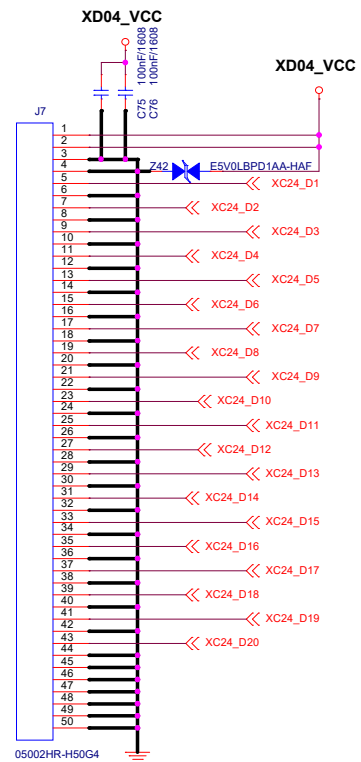

 Global Technologies 글로벌 테크놀로지			Design	Check
Size	Project name XD04, XC24 RT Board	Rev	K.D.I	K.Y.G
Customer	Page name MP3. Interface Board	CONFIDENTIAL 0.0		
	Sheet 3 of 3			
	Date: Monday, September 08, 2025			