

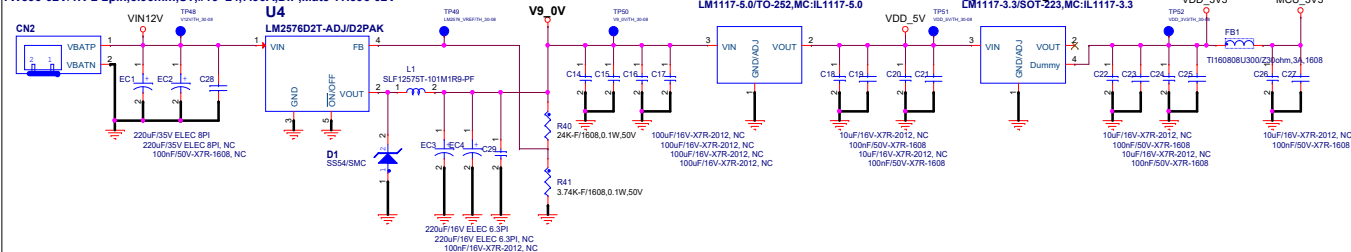


U3 3.3V Regulation

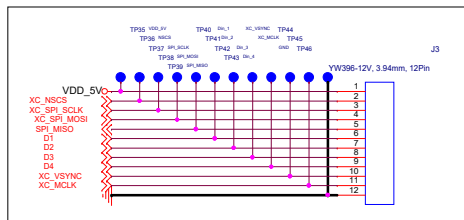


The schematic diagram illustrates the internal circuitry of the U1 XC-24/QFN6060, 48PIN component. The component is a microcontroller with various pins and internal blocks. The diagram shows the following components and connections:

- Power Supply:** VDD_5V is connected to the top of the component. A 10kF/1608 capacitor (C4) is connected between VDD_5V and TP16. A 10kF/1608 capacitor (C1) is connected between VDD_5V and TP13.
- Ground:** GND is connected to the bottom of the component. A 10kF/1608 capacitor (C2) is connected between GND and TP13.
- Signal Lines:** The component has 48 pins, labeled D1 through D48. The pins are connected to various signal lines, including D1-D14, D15-D18, D19-D24, D25-D30, D31-D36, D37-D42, and D43-D48.
- Internal Circuitry:** The component contains a microcontroller (U1) and various peripheral components, including resistors (R1-R28), capacitors (C1-C11), and LEDs (LED1-LED4).
- Labels:** The component is labeled "U1 XC-24/QFN6060, 48PIN".

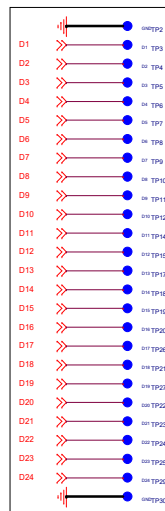

J1
2X19. 2.54 HEADER FEMALE

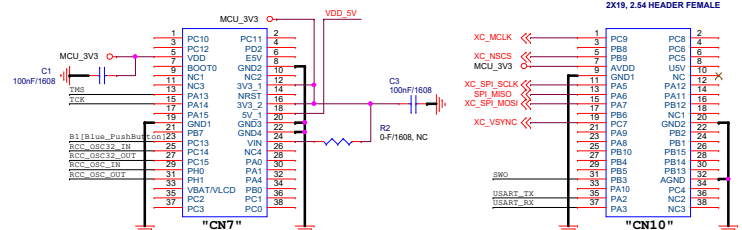

				Design	Check	Approval
Size	Function Name XIC_XD_REL_CONTROL_BID		Rev	<Design>	<Design>	<Design>
Customer	Page Name <Design>		Rev Code <Design>			
	Version 1 out of 1					
	Date Tuesday, June 11, 2025					