


< Rev History >

1) '24. 3. 14 - 초안 작성

Title			P0. REV HISTORY		
Size	Document Number				Rev
A3	<Doc >				<0.1 >
Date	Monday, March 25, 2024			Sheet	1 of 6


LOGIC POWER STANDBY

YW396-02V/1R*2-2pin,3.96mm,ST,#16-24,7.96A,DIP,Mate YH396-02V

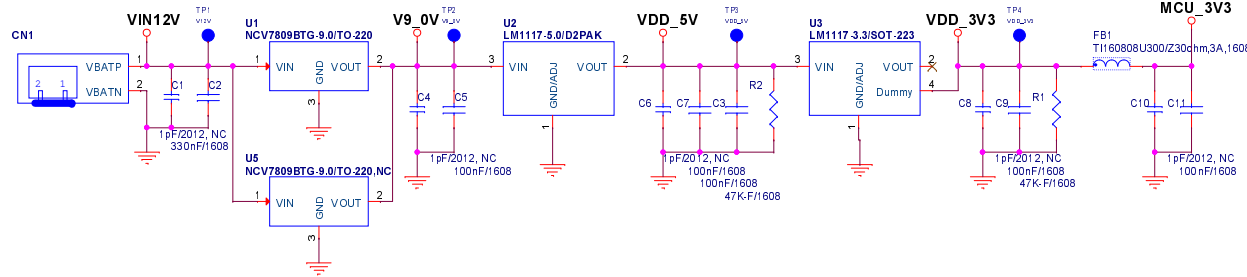


VREF

VREF 전원
REF02HSZ 0.5%
REF02CSZ 1%

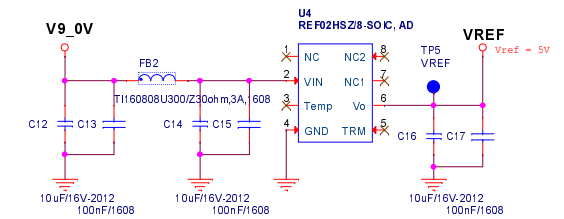

XD12 VCC

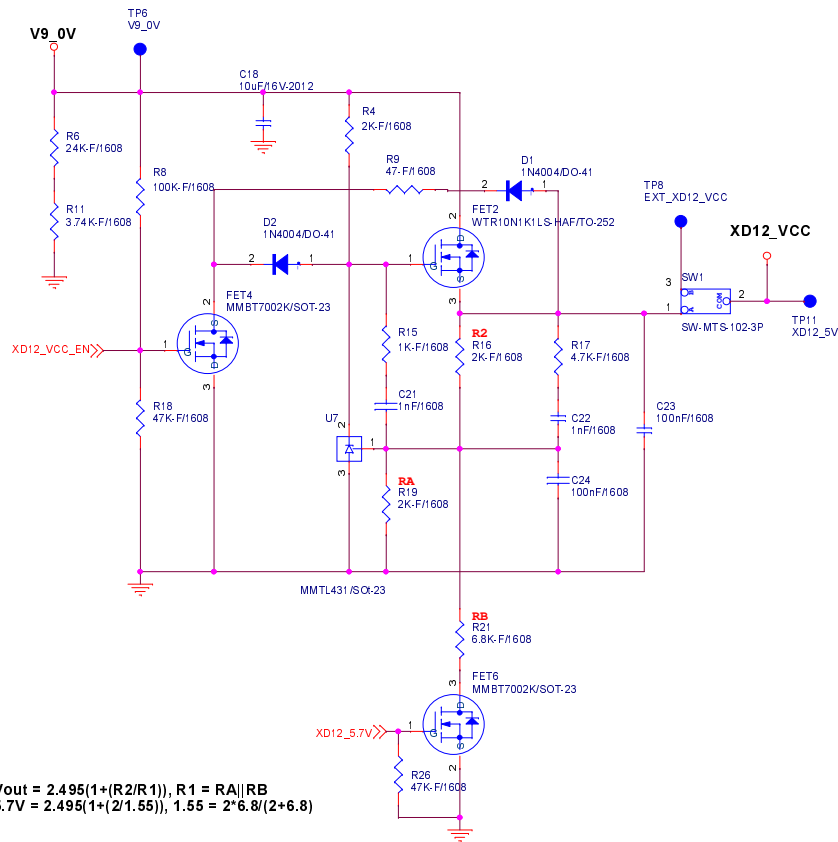


$$V_{out} = 2.495(1 + (R2/R1)), R1 = RA || RB$$

$$5.7V = 2.495(1 + (2/1.55)), 1.55 = 2 * 6.8 / (2 + 6.8)$$


VLED POWER

"Control for VLED 9V"

"L" = VLED_9V -> 9V

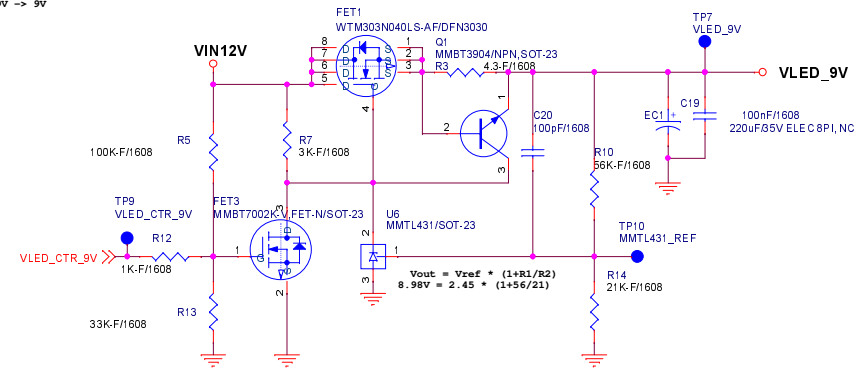

XC24 VCC

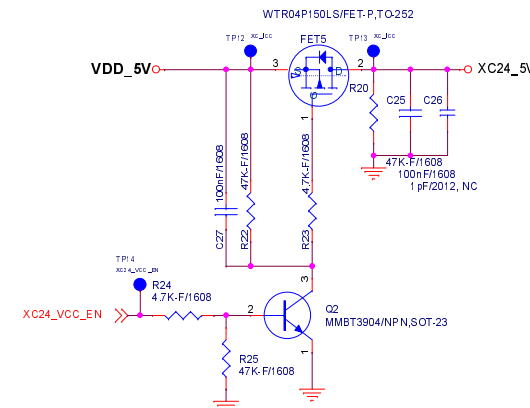


File P1. POWER LOGIC

Size A3 Document Number <Doc> Rev <0.1>


Date: Tuesday, March 26, 2024 Sheet 2 of 6

MCU
NUCLEO-F446RE

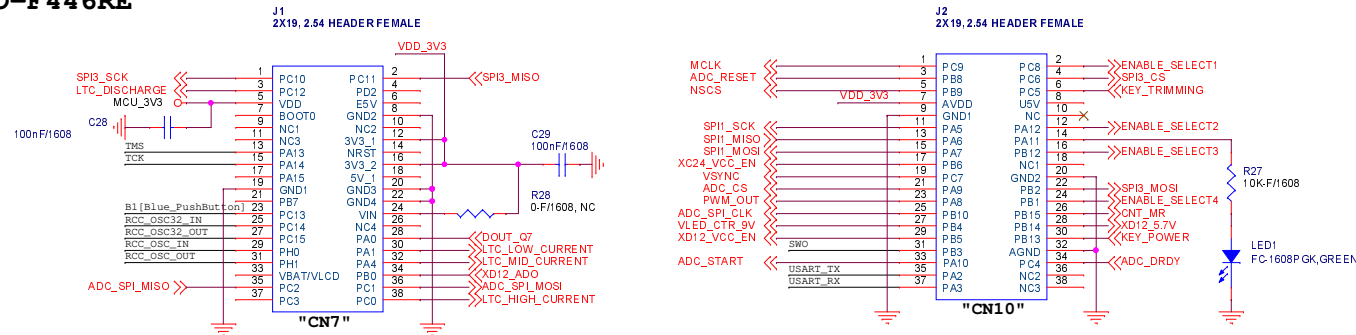


ADC


< ADC FOR XD12>

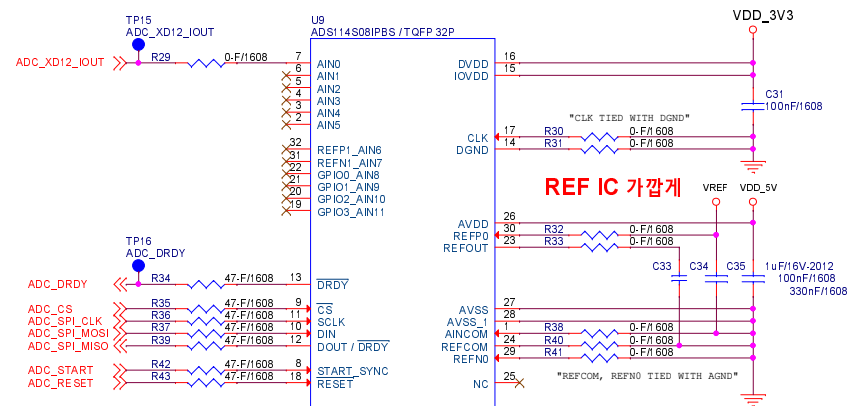


FREQUENCY DIVIDER

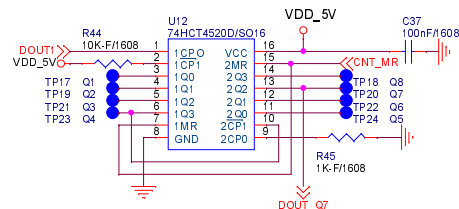

INVERTER

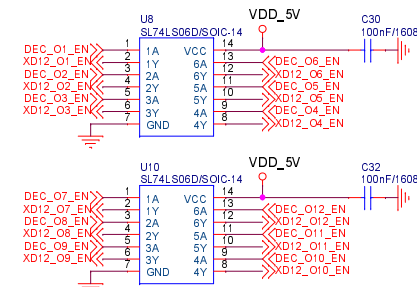

4-16 Decoder

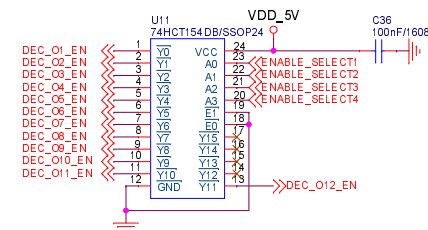

Title			
P2. MCU, ADC			
Size	Document Number	Rev	
Custom	<Doc>	<1>	
Date:	Monday, March 25, 2024	Sheet	3 of 6

[illegible]

Potentiometer

VLED_SHORT

0~2.5V

P1W_25

TP49 VRV_SHORT

C75 470pF/1608

R102 10K-F/1608

U15A LM324/SOIC14

VDD_5V

C79 100nF/1608

R104 47K-F/1608

TP46 OUT_OP

FET9 MMFTN123/FET-N,SOT-23

C78 1pF/1608, NC

TP50 GATE1

R90 250K-F/1608

TP44 50V_EXT

FET8 MMFTN123/FET-N,SOT-23

C76 100pF/1608

TP48 GATE2

R105 1.5K-F/DIP,1.0W

50V_EXT

DRAIN PAD 50V

FET7 MMFTN123/FET-N,SOT-23

R106 1.5K-F/DIP,1.0W

R107 24-F/DIP,1.0W

Q3 MMBT2222A/NPN,T.O-236

D15 1N4007/DO-41

0~40V

VLED_SHORT

TP65 OUT_SHORT

C80 1pF/1608, NC

R110 10K-F/1608

C82 1pF/1608, NC

C81 1pF/1608, NC

R108 150K-F/1608

VLED_FB

0~2.5V

VDD_5V

TP70 VRV_FB

U15B LM324/SOIC14

C84 100nF/1608

R116 1K-F/1608

D16 1N4007/DO.41

TP71 OUT_FB

0~2.5V

POW_2.5V

C85 100pF/1608

R120 10K-F/1608


C89 1pF/1608, NC

C88 1pF/1608, NC

VLED_FB

File P4. VLED			
Size A3	Document Number <Doc>	Rev <Rev Code>	
Date:	Tuesday, March 26, 2024	Sheet	5 of 6

Current Sensing

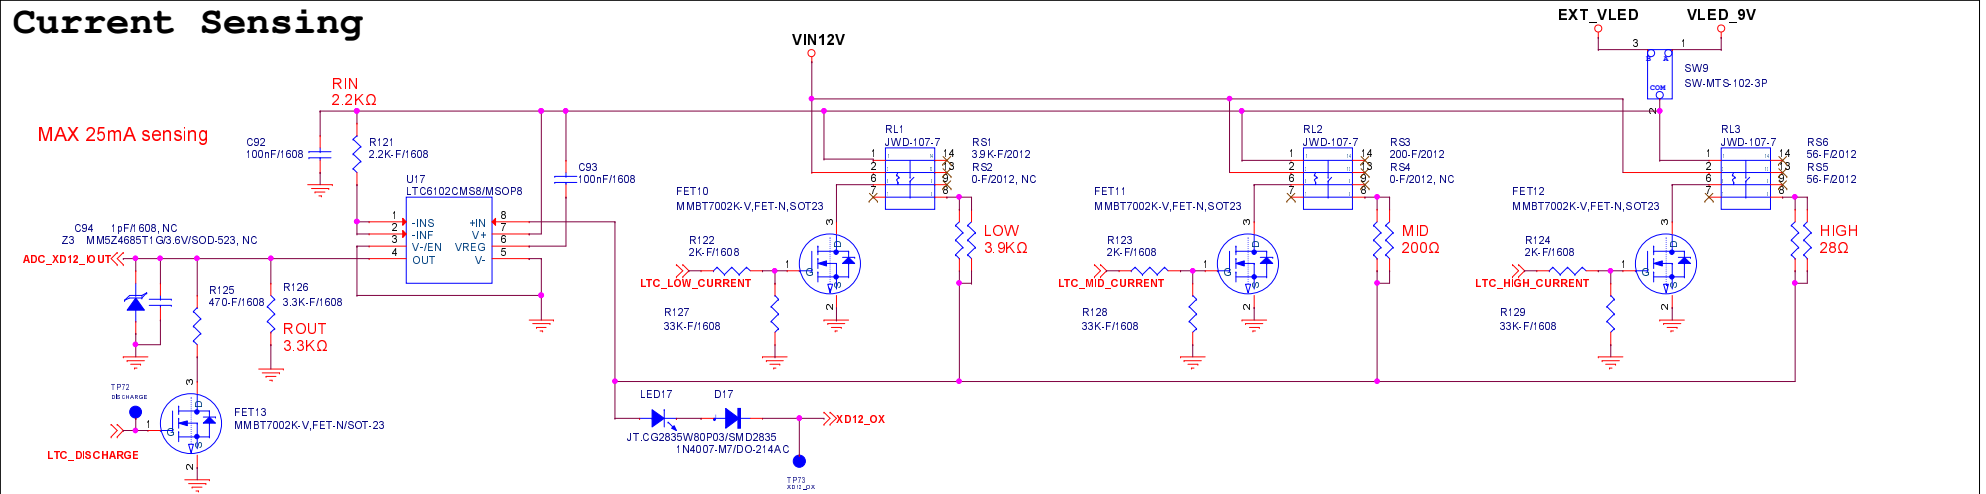

Output Select

