BDE




- Full-Featured Development Software for UI and Program Editing
- Smart Graphic Tools for All UI Design Needs
- WYSIWYG UI Editor for Intuitive Design
- Advanced Python Programming with Easy AI Integration

CPU Board with Relative Display

PICO

Over 16 I/O available

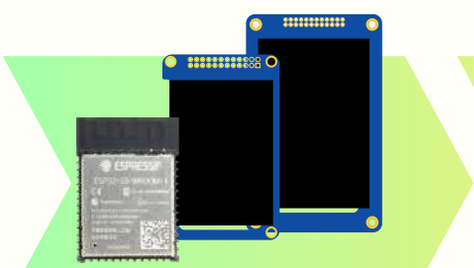


ESP32-S3@240MHz

2.4” 4.3”

INFINITE

Over 40 I/O available

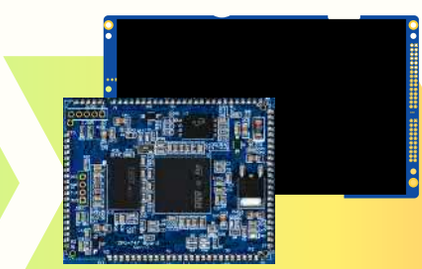

STM32-H7@480MHz

5.0” 10.1”

GRANDEUR


Over 28 I/O available



Rasp. Pi CM5 64-bit@2.4GHz

7.0” Full HD

Aeternus Display

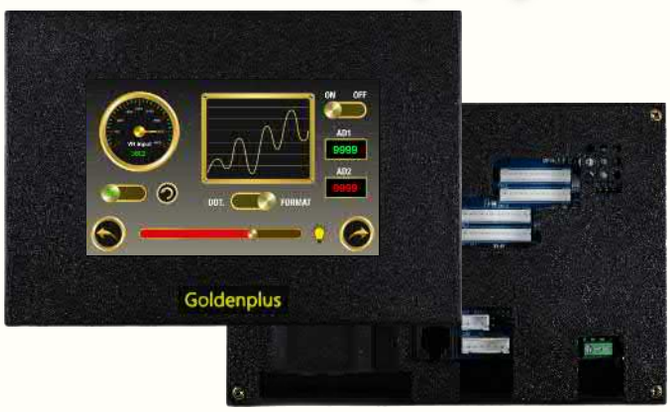

- IPS TFT Display with PCAP
- Build-in PWM with capture function
- Build-in 10-bit Resolution analog input
- Supports I2C Interface
- Network interface : ETHERNET, WIFI
- Industrial communication interface : RS485, CANBUS, USB

Omni HMI/PLC



- IPS TFT Display with PCAP
- Relay Output Interface
- 24V DC Isolated Digital Input
- 0–10V Voltage Analog Input
- Communication Interface : ETHERNET, RS485, WIFI