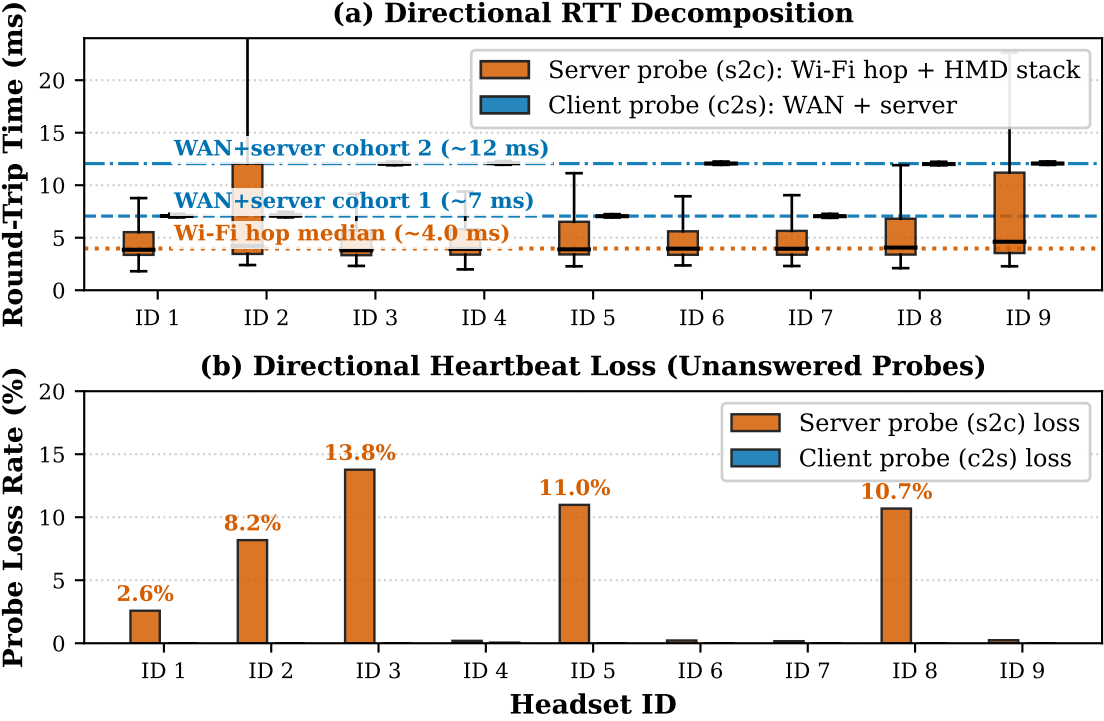
(a) Directional RTT Decomposition
Round-Trip Time (ms)
Server probe (s2c): Wi-Fi hop + HMD stack
Client probe (c2s): WAN + server
WAN+server cohort 2 (~12 ms)
WAN+server cohort 1 (~7 ms)
Wi-Fi hop median (~4.0 ms)
0
5
10
15
20
ID 1
ID 2
ID 3
ID 4
ID 5
ID 6
ID 7
ID 8
ID 9
(b) Directional Heartbeat Loss (Unanswered Probes)
Probe Loss Rate (%)
Server probe (s2c) loss
Client probe (c2s) loss
2.6%
8.2%
13.8%
11.0%
10.7%
0
5
10
15
20
ID 1
ID 2
ID 3
ID 4
ID 5
ID 6
ID 7
ID 8
ID 9
Headset ID