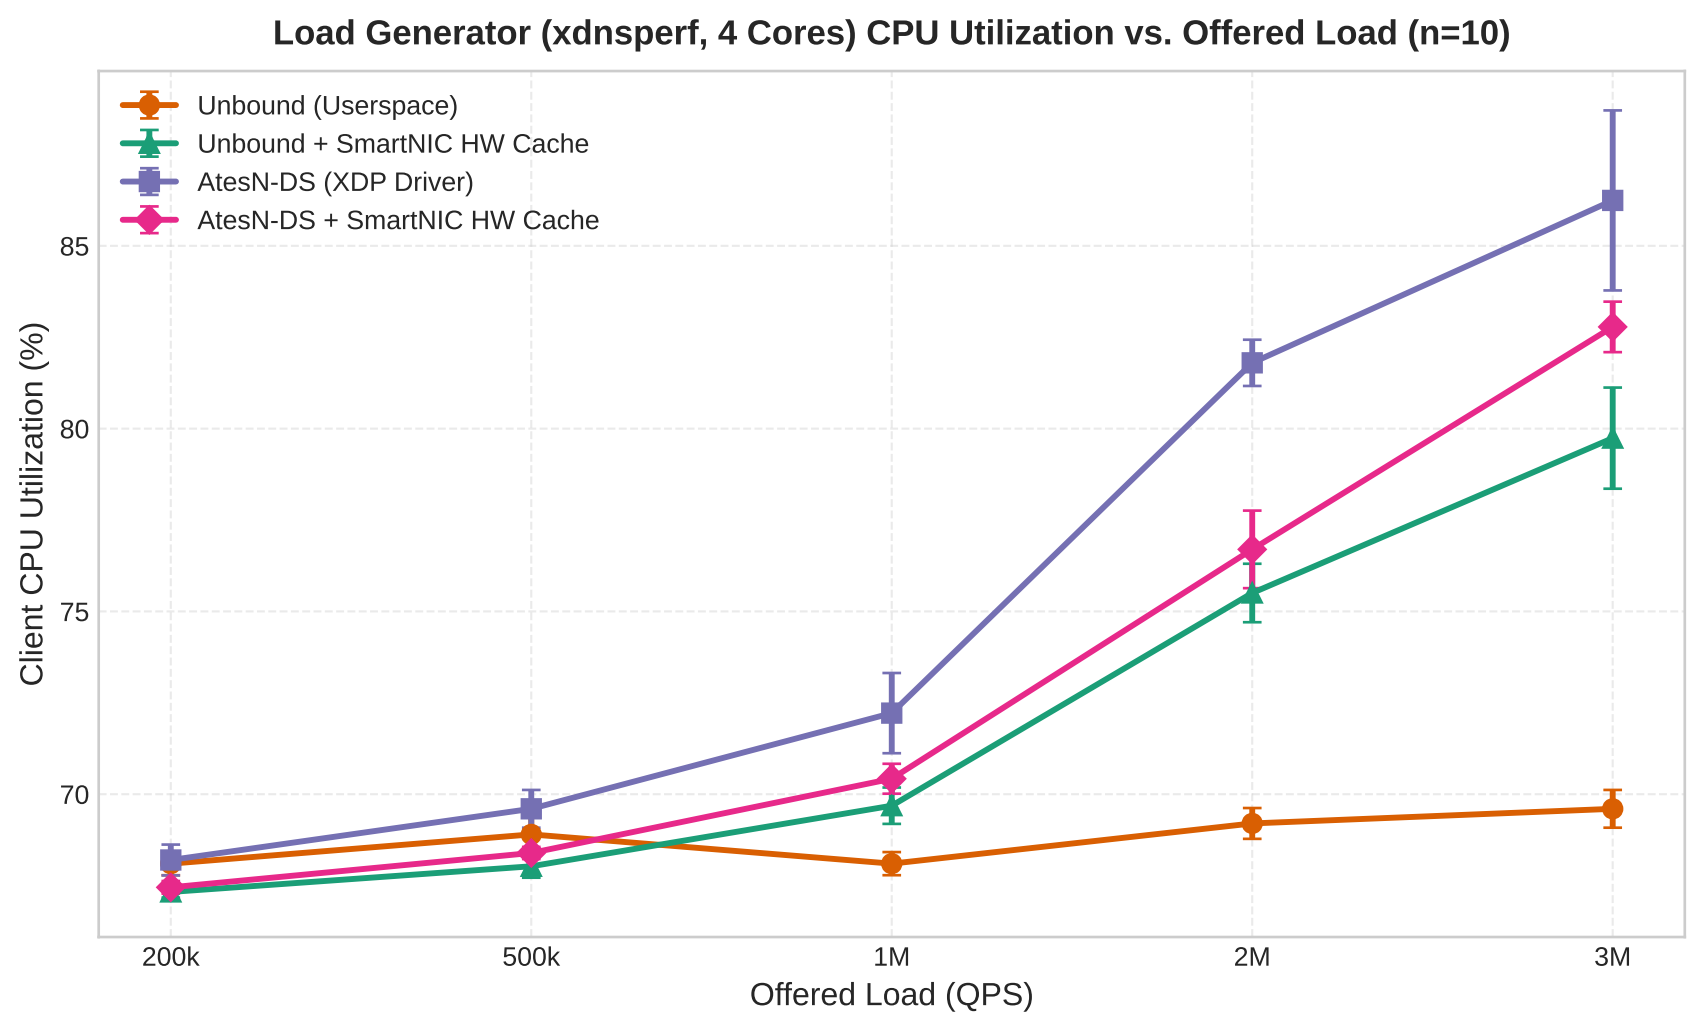
Load Generator (xdnsperf, 4 Cores) CPU Utilization vs. Offered Load (n=10)
Unbound (Userspace)
Unbound + SmartNIC HW Cache
AtesN-DS (XDP Driver)
AtesN-DS + SmartNIC HW Cache
Client CPU Utilization (%)
85
80
75
70
200k
500k
1M
2M
3M
Offered Load (QPS)