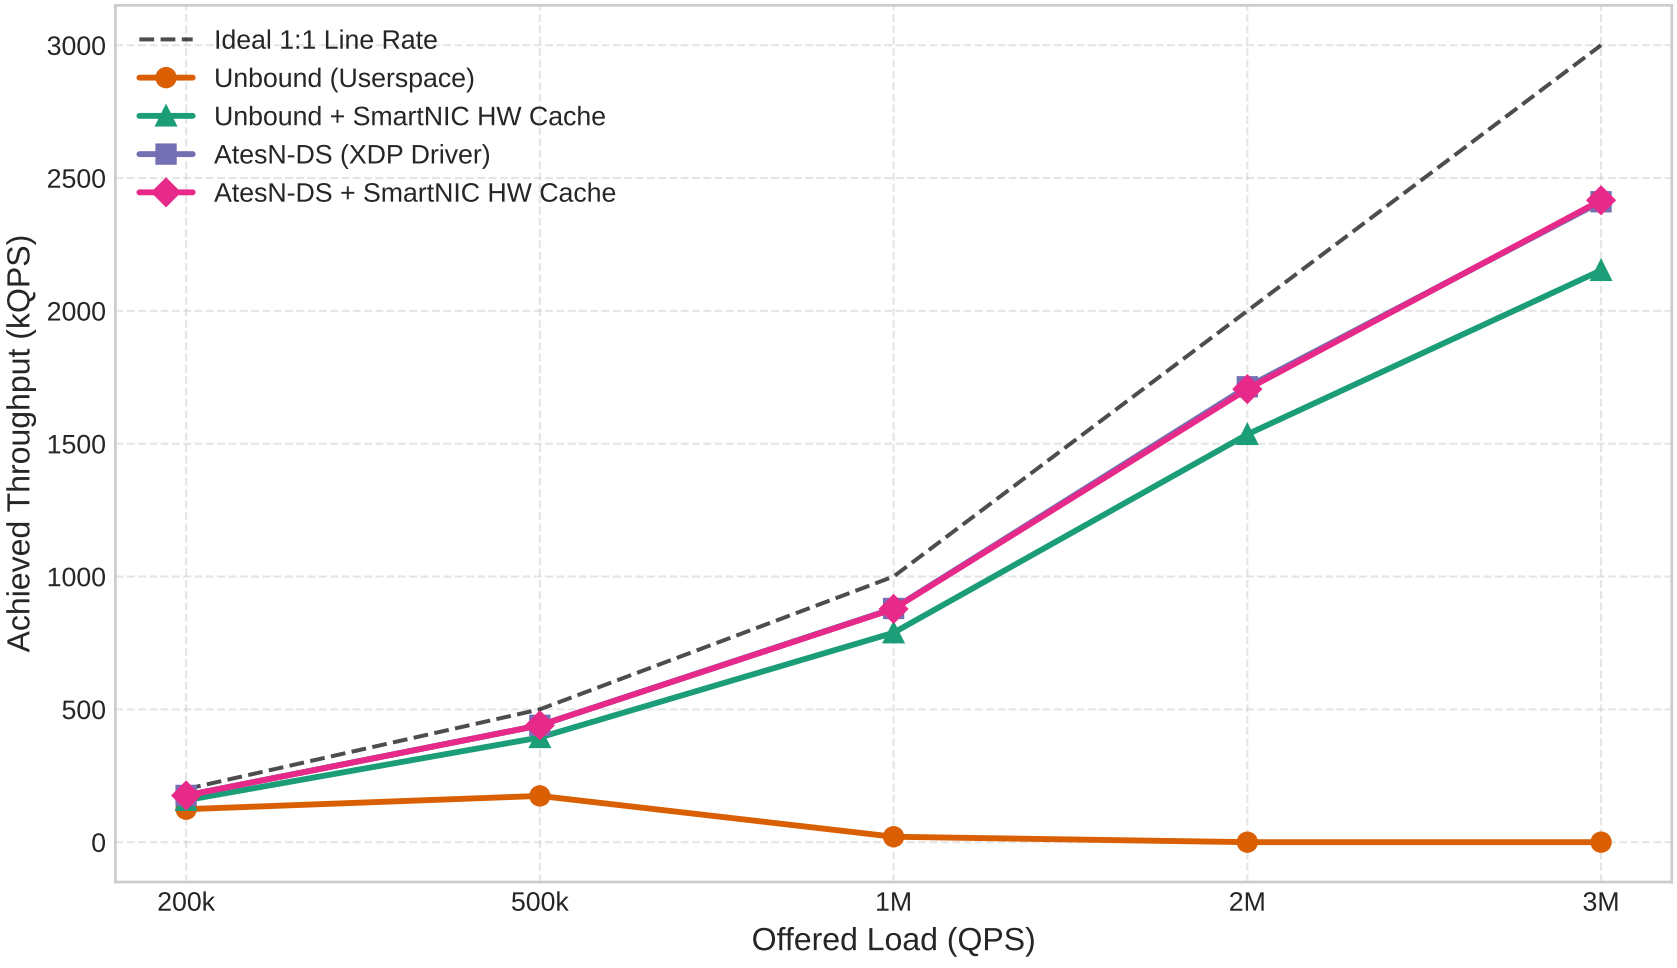
Throughput Scaling Curve vs. Ideal Line Rate (2 Cores, 4 RSS Queues)
Ideal 1:1 Line Rate
Unbound (Userspace)
Unbound + SmartNIC HW Cache
AtesN-DS (XDP Driver)
AtesN-DS + SmartNIC HW Cache
Achieved Throughput (kQPS)
3000
2500
2000
1500
1000
500
0
200k
500k
1M
2M
3M
Offered Load (QPS)