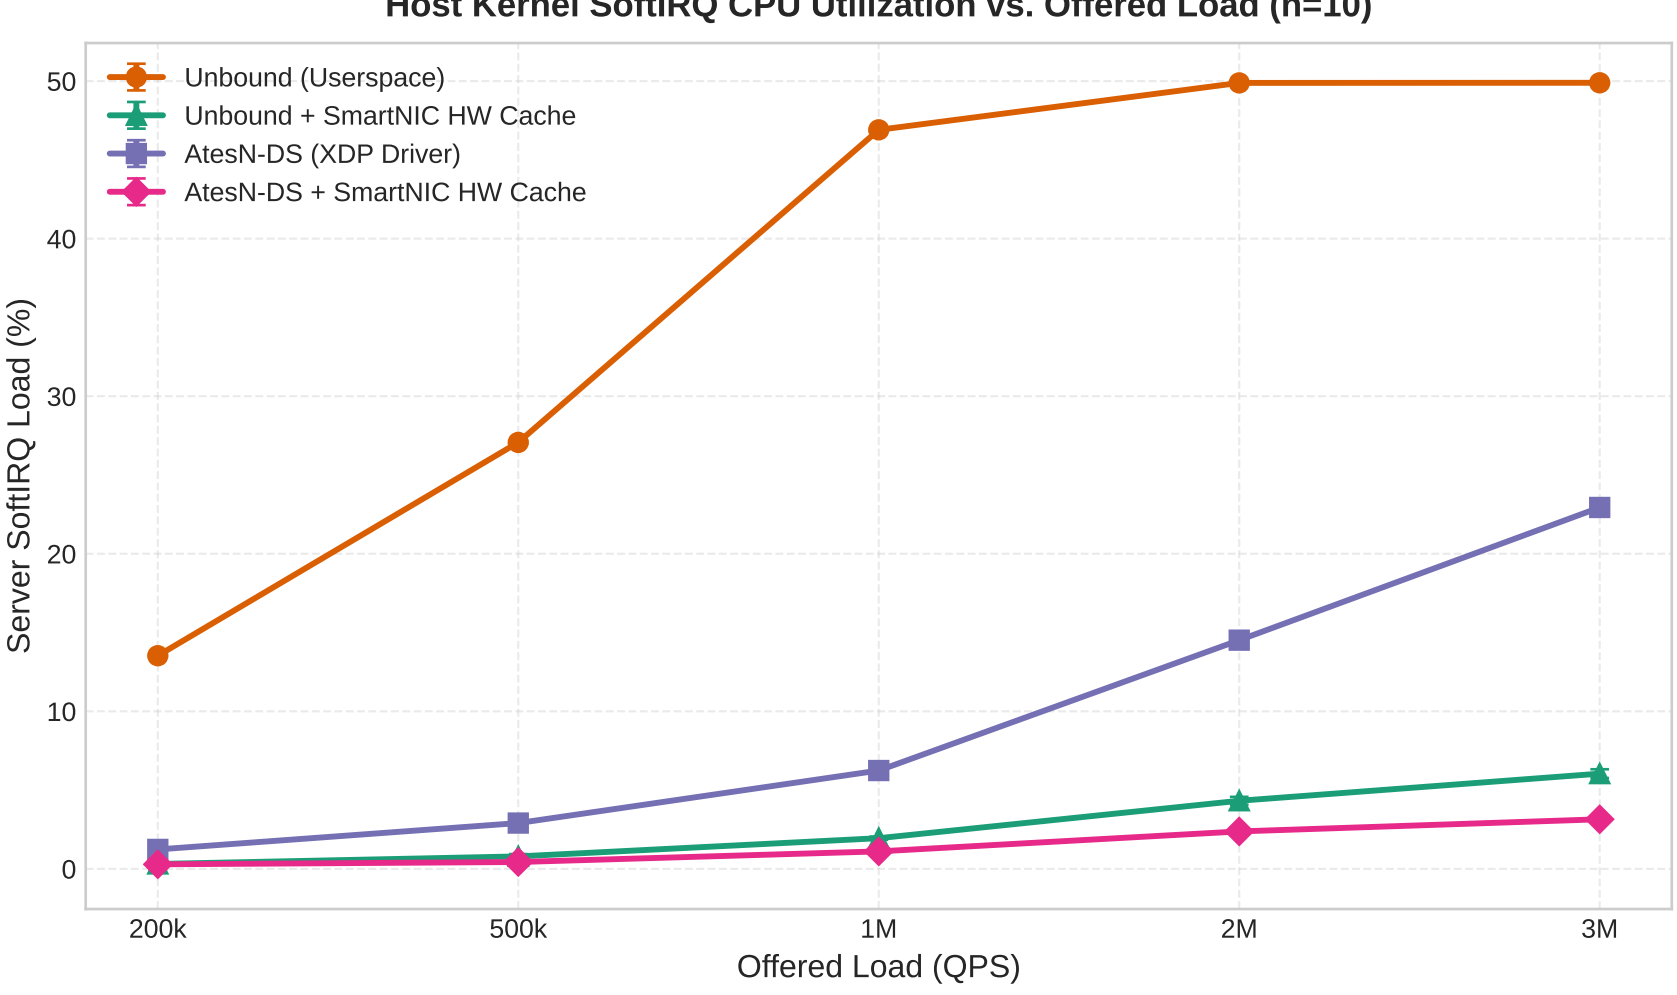
Host Kernel SoftIRQ CPU Utilization vs. Offered Load (n=10)
Unbound (Userspace)
Unbound + SmartNIC HW Cache
AtesN-DS (XDP Driver)
AtesN-DS + SmartNIC HW Cache
Server SoftIRQ Load (%)
0
10
20
30
40
50
200k
500k
1M
2M
3M
Offered Load (QPS)