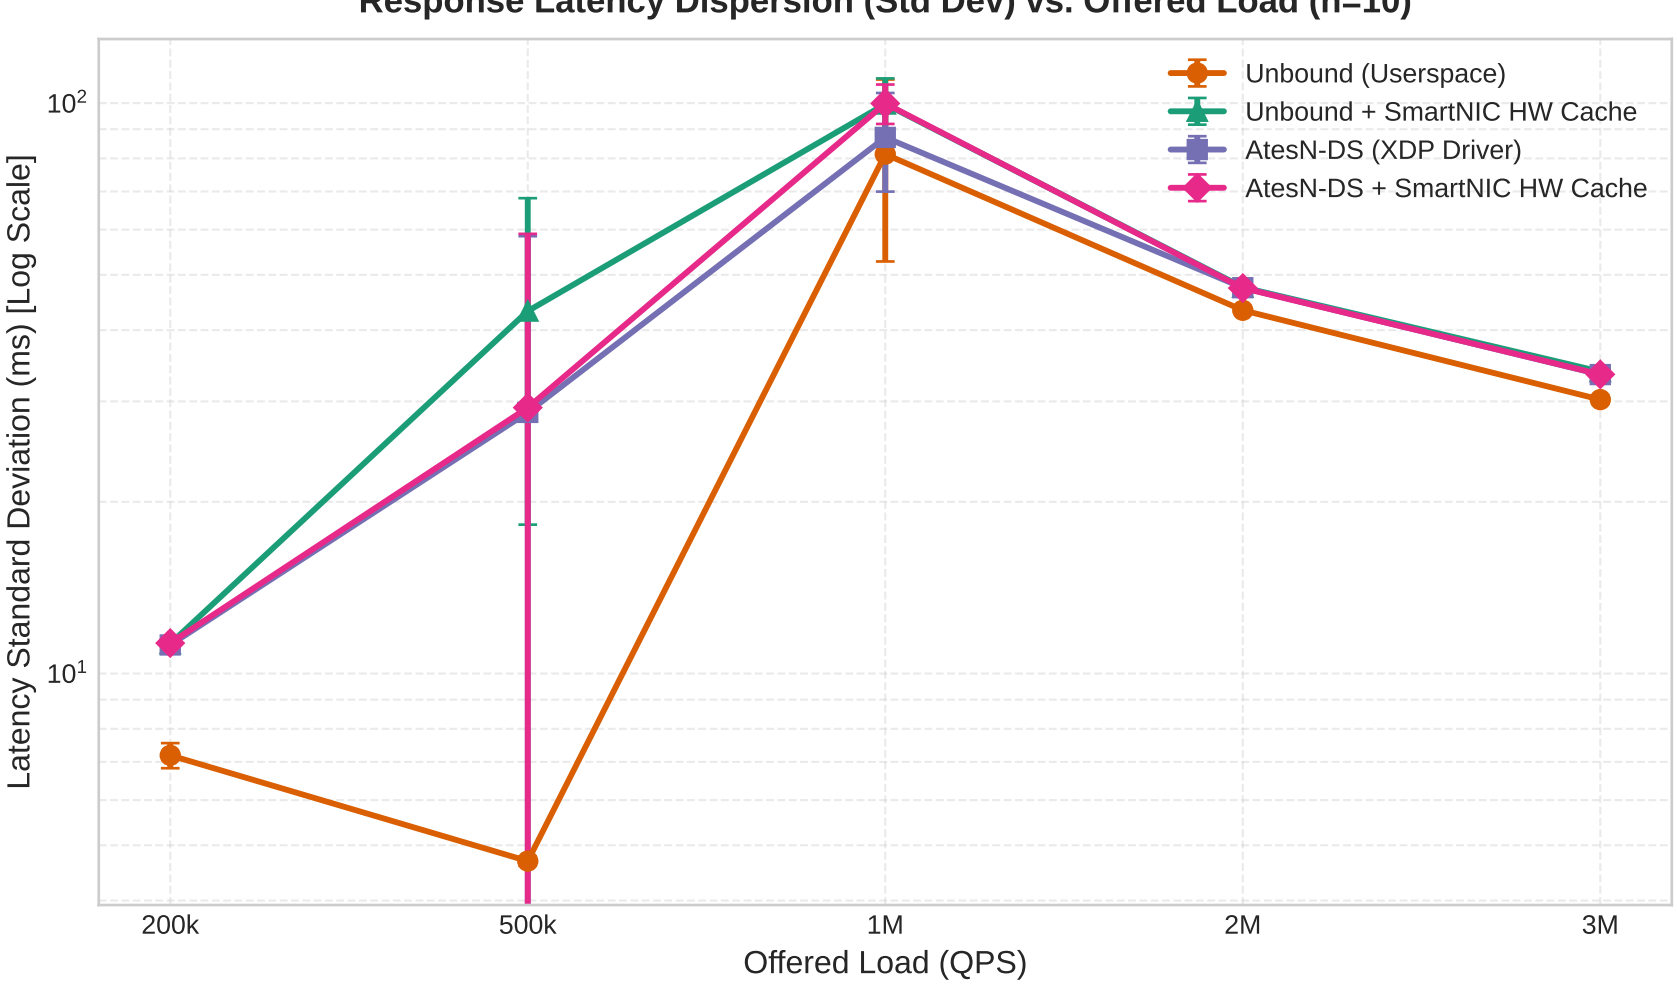
Response Latency Dispersion (Std Dev) vs. Offered Load (n=10)
Unbound (Userspace)
Unbound + SmartNIC HW Cache
AtesN-DS (XDP Driver)
AtesN-DS + SmartNIC HW Cache
Latency Standard Deviation (ms) [Log Scale]
$10^2$
$10^1$
200k
500k
1M
2M
3M
Offered Load (QPS)