ROBOTICS & AUTOMATION (CM104)

BSc . Biochemistry

Jeel Parmar (22000792) Second Year, Semester 3

Course In-charge: Prof. Nicky Joshi

School Engineering and Technology, Navrachana University, Vadodara

Autumn Semester (2023-2024)

SCHEMATIC DIAGRAM:

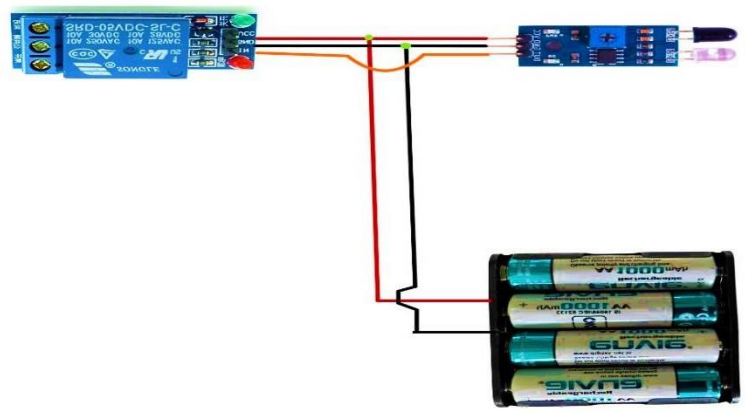

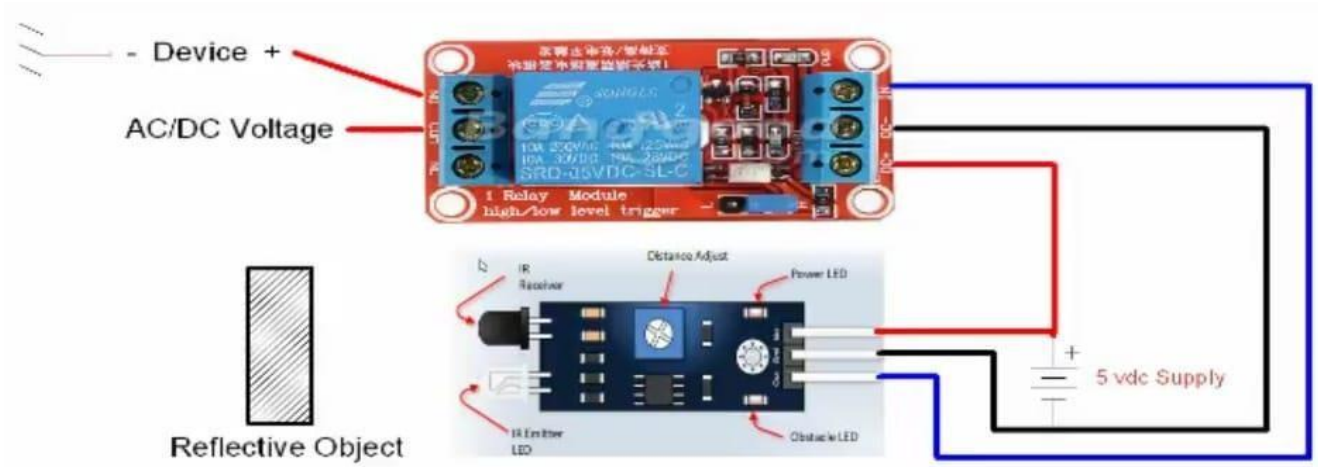

Details of the Components:

What is IR sensor?

An infrared sensor is an electrical sensor that detects and measures infrared light emitted by an object or its surroundings. The IR sensor emits or detects infrared radiation to identify certain features in its surroundings. These sensors can also detect or measure a target's heat as well as its motion. The IR sensor circuit is a critical component in many electronic devices.

The module can be 3-5V DC power supply. When the power is turned on, the red power indicator lights;

With the screw holes 3mm, easy fixed installation;

Board size: 3.2CM * 1.4CM

Each module has been shipped threshold comparator voltage adjusted by potentiometer good, non-special case, do not adjustable potentiometer.

IR sensor Module Interface Description

VCC : 3.3V-5V external voltage (can be directly connected to 5v and 3.3v MCU)

GND : GND External

OUT : small board digital output interface (0 and 1)

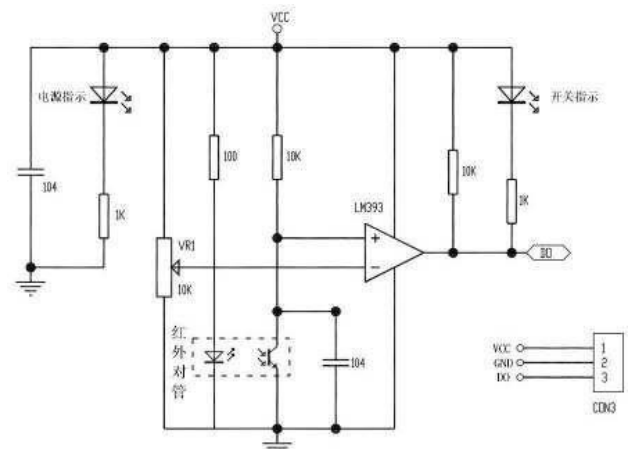

Specification Sheets:

Parameter	Value
Main Chip	LM393
Operating Voltage Range	3.6~5 VDC
Average Current Consumption	0.06 mA
Detection Angle	35°
Distance Measuring Range	2 ~ 30 cm
Dimensions (mm) LxWxH	31 x 15 x 8
Weight (gm)	5

What is Relay Module?

Relay is an electromechanical device that uses an electric current to open or close the contacts of a switch. The single-channel relay module is much more than just a plain relay, it comprises of components that make switching and connection easier and act as indicators to show if the module is powered and if the relay is active or not

Features of 5 v 1 channel relay module

- Trigger Voltage (Voltage across coil) : 5V DC
- Trigger Current (Nominal current) : 70mA
- Maximum AC load current: 10A @ 250/125V AC
- Maximum DC load current: 10A @ 30/28V DC
- Compact 5-pin configuration with plastic moulding
- Operating time: 10msec Release time: 5msec
- Maximum switching: 300 operating/minute (mechanically)

Datasheet of Relay

1. MAIN FEATURES

- Switching capacity available by 10A in spite of small size design for highdensity P.C. board mounting technique.
- UL,CUL,TUV recognized.
- Selection of plastic material for high temperature and better chemical solution performance.
- Sealed types available.
- Simple relay magnetic circuit to meet low cost of mass production.

2. APPLICATIONS

- Domestic appliance, office machine, audio, equipment, automobile, etc.
  (Remote control TV receiver, monitor display, audio equipment high rushing current use application.)

3. ORDERING INFORMATION

SRD	XX VDC	S	L	C
Model of relay	Nominal coil voltage	Structure	Coil sensitivity	Contact form
SRD	03、05、06、09、12、24、48VDC	S:Sealed type	L:0.36W	A:1 form A
				B:1 form B
		F:Flux free type	D:0.45W	C:1 form C

4. RATING

CCC	FILE NUMBER:CH0052885-2000	7A/240VDC
CCC	FILE NUMBER:CH0036746-99	10A/250VDC
UL /CUL	FILE NUMBER: E167996	10A/125VAC 28VDC
TUV	FILE NUMBER: R9933789	10A/240VAC 28VDC

5. DIMENSION(unit:mm) DRILLING(unit:mm) WIRING DIAGRAM

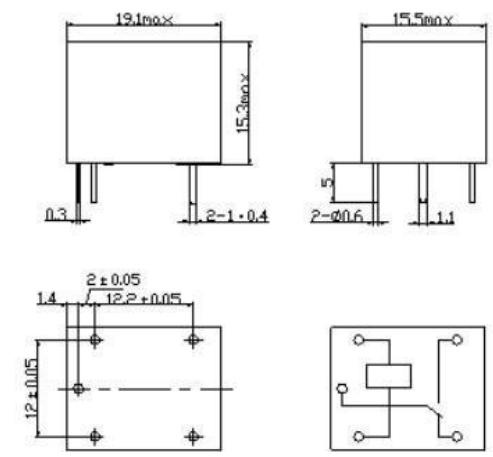

6. COIL DATA CHART (AT20°C)

Coil Sensitivity	Coil Voltage Code	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance (Ω) ±10%	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Max-Allowable Voltage (VDC)
SRD (High Sensitivity)	03	03	120	25	abt. 0.36W	75%Max.	10% Min.	120%
	05	05	71.4	70				
	06	06	60	100				
	09	09	40	225				
	12	12	30	400				
	24	24	15	1600				
	48	48	7.5	6400				
SRD (Standard)	03	03	150	20	abt. 0.45W	75% Max.	10% Min.	110%
	05	05	89.3	55				
	06	06	75	80				
	09	09	50	180				
	12	12	37.5	320				
	24	24	18.7	1280				
	48	48	10	4500	abt. 0.51W			

7. CONTACT RATING

Item \ Type	SRD	
	FORM C	FORM A
Contact Capacity Resistive Load (cosΦ=1)	7A 28VDC 10A 125VAC 7A 240VAC	10A 28VDC 10A 240VAC
Inductive Load (cosΦ=0.4 L/R=7msec)	3A 120VAC 3A 28VDC	5A 120VAC 5A 28VDC
Max. Allowable Voltage	250VAC/110VDC	250VAC/110VDC
Max. Allowable Power Force	800VAC/240W	1200VA/300W
Contact Material	AgCdO	AgCdO

8. PERFORMANCE (at initial value)

Item \ Type	SRD
Contact Resistance	100mΩ Max.
Operation Time	10msec Max.
Release Time	5msec Max.
Dielectric Strength Between coil & contact Between contacts	 1500VAC 50/60HZ (1 minute) 1000VAC 50/60HZ (1 minute)
Insulation Resistance	100 MΩ Min. (500VDC)
Max. ON/OFF Switching Mechanically Electrically	 300 operation/min 30 operation/min
Ambient Temperature	-25°C to +70°C
Operating Humidity	45 to 85% RH
Vibration Endurance Error Operation	 10 to 55Hz Double Amplitude 1.5mm 10 to 55Hz Double Amplitude 1.5mm
Shock Endurance Error Operation	 100G Min. 10G Min.
Life Expectancy Mechanically Electrically	 10^7 operations. Min. (no load) 10^5 operations. Min. (at rated coil voltage)
Weight	abt. 10grs.







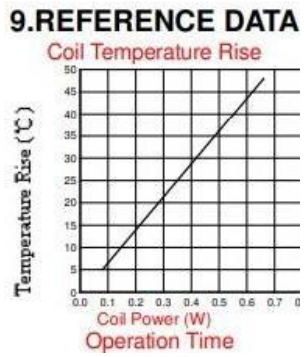

Images of the physical circuit: