



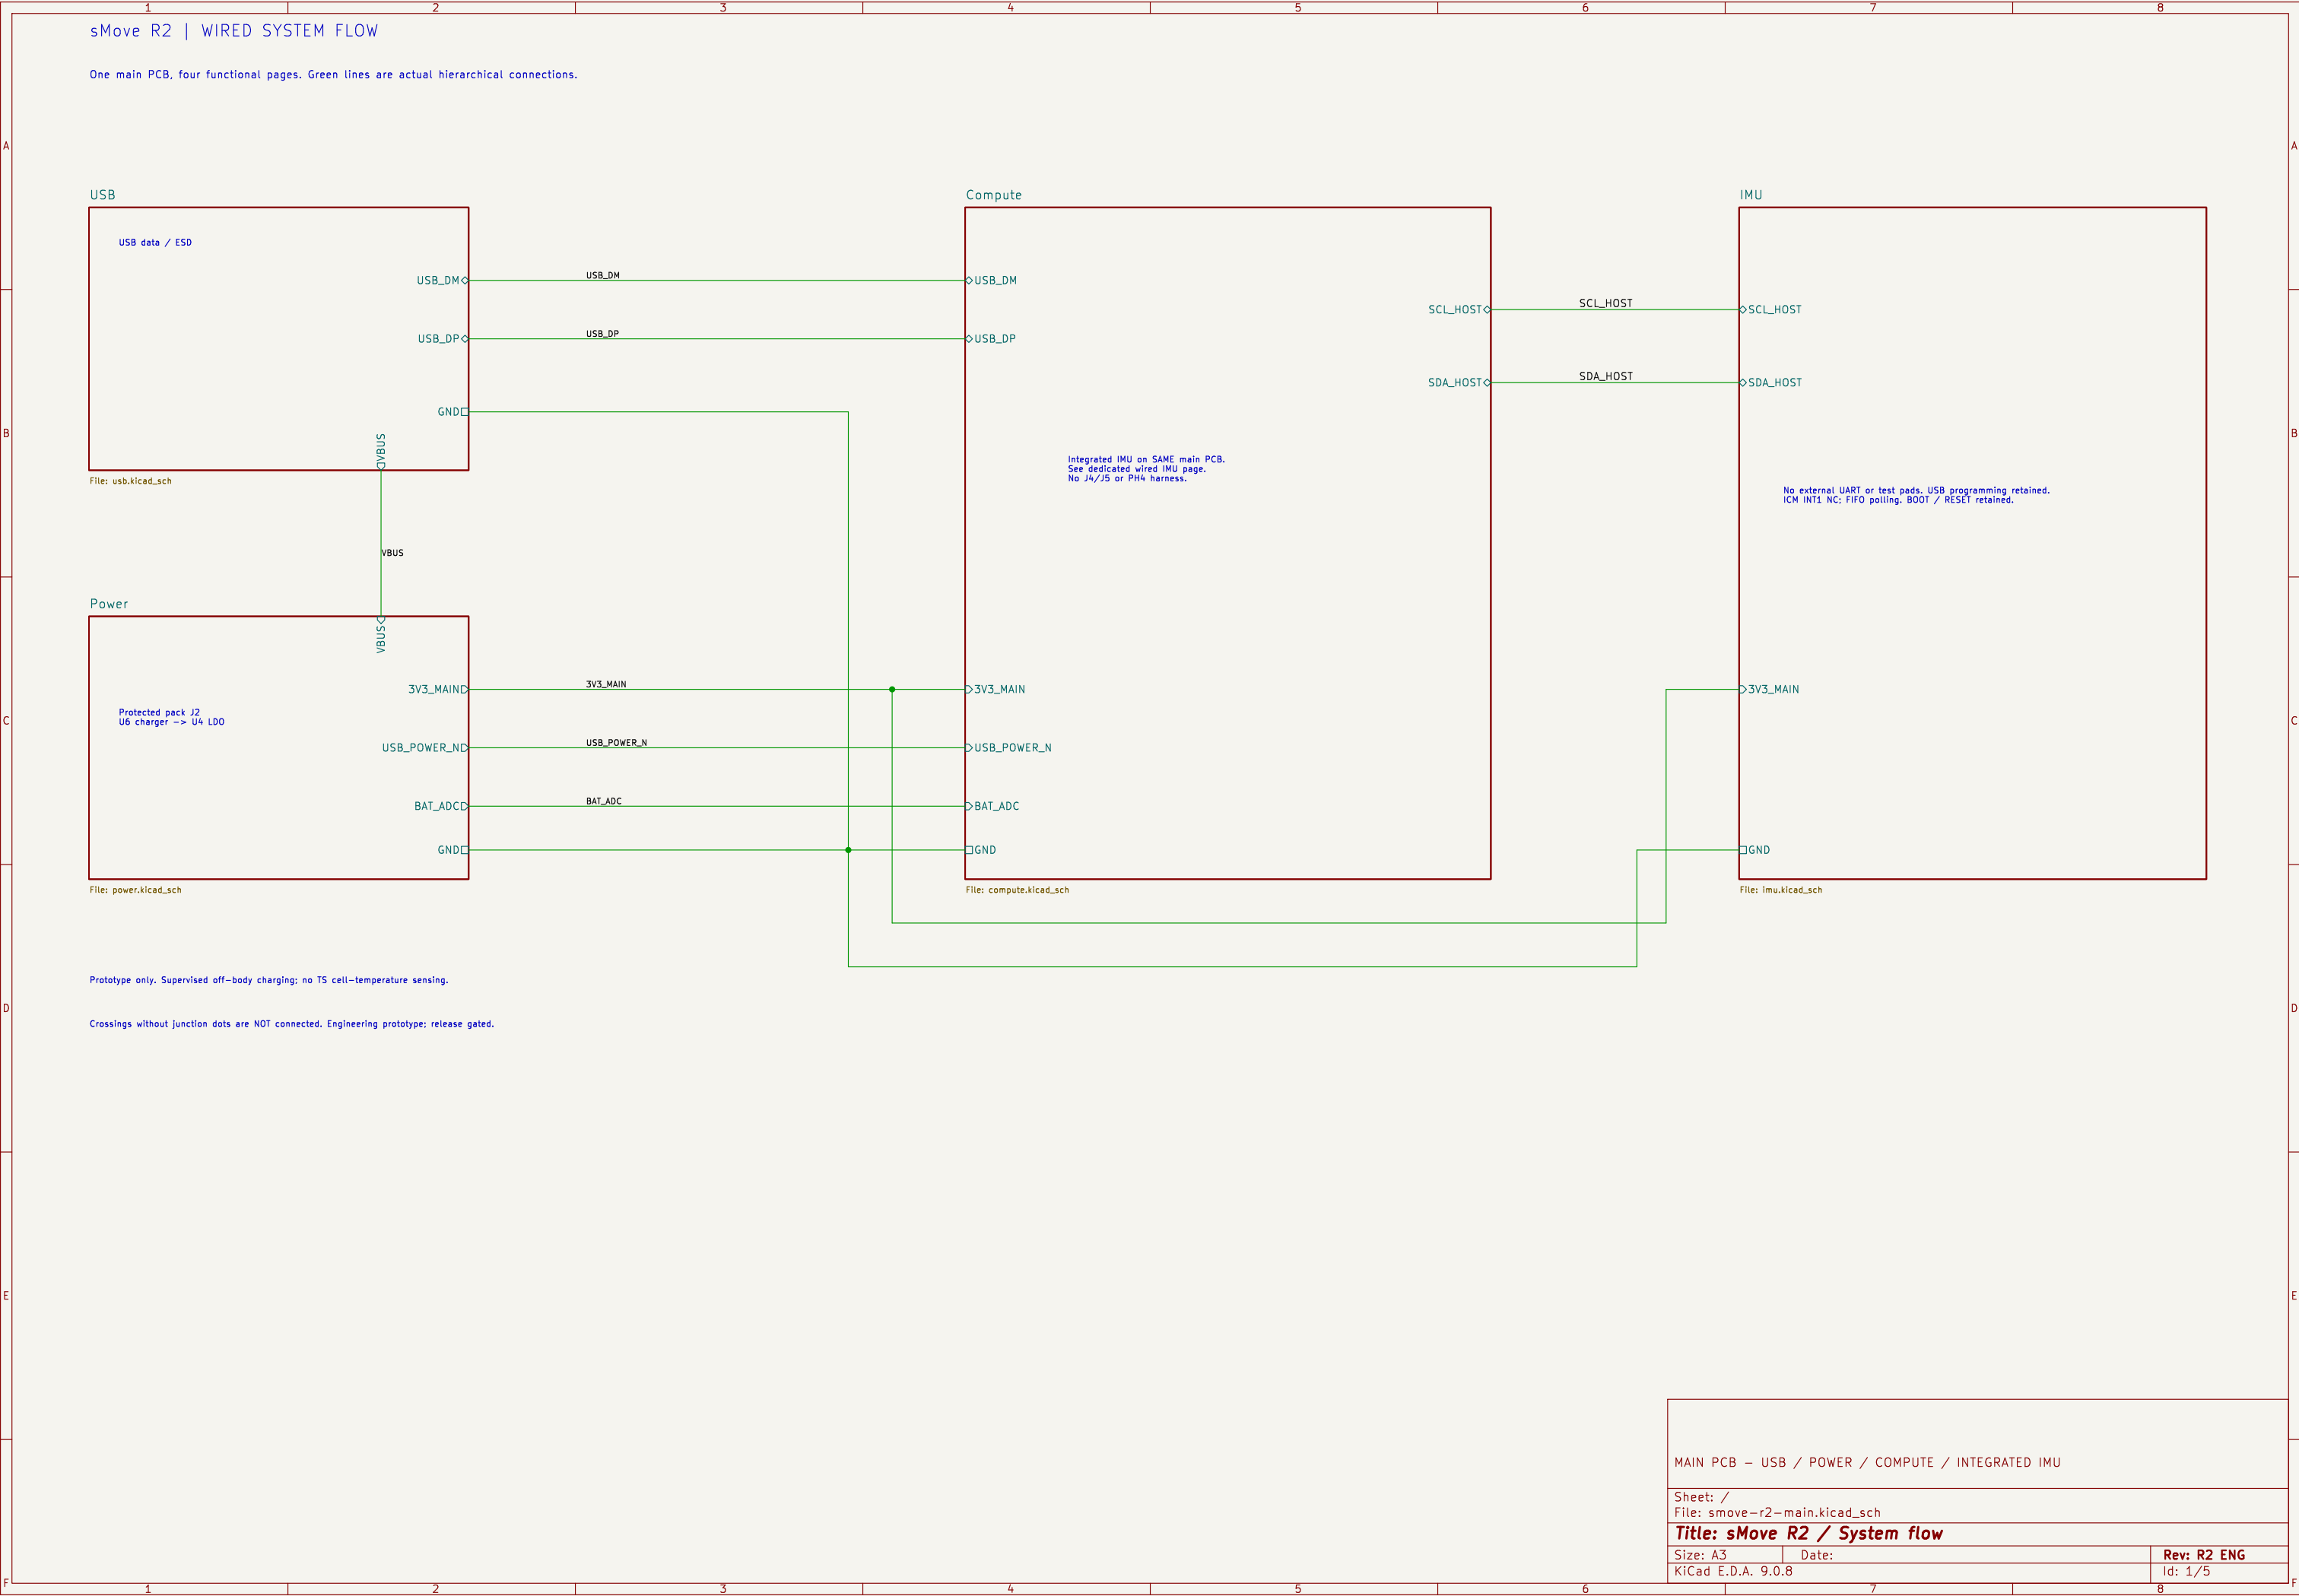

USB | Type-C receptacle, data ESD and CC termination

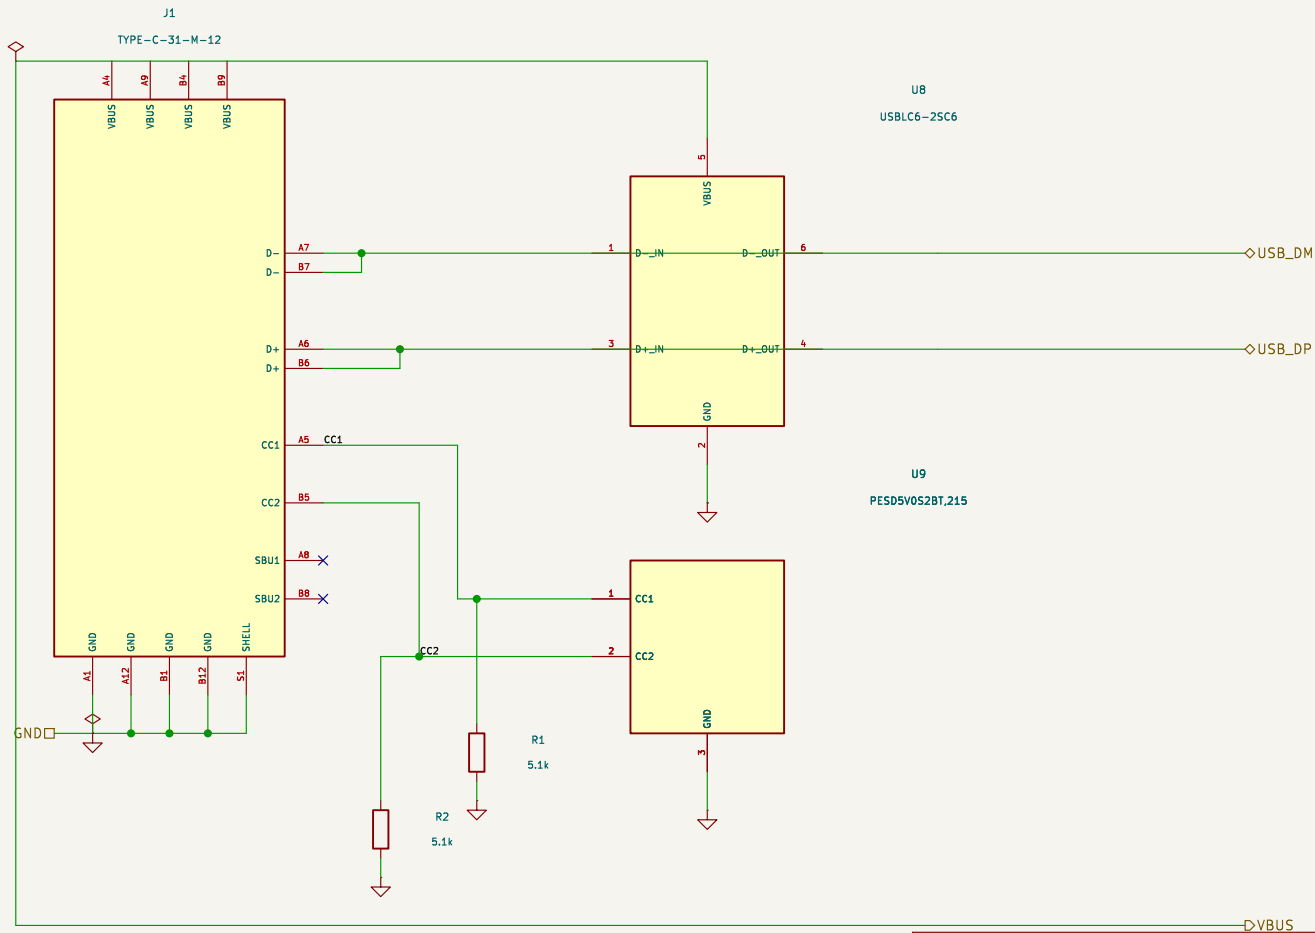

Native USB: disconnect before host sleep/off. ROM/crash does not enforce data isolation.

ENGINEERING PROTOTYPE – NO MANUFACTURING OR CHARGE APPROVAL

Sheet: /USB/
File: usb.kicad_sch

Title: **sMove R2 / USB**

Size: A4

Date:

KiCad E.D.A. 9.0.8

Rev: **R2 ENG**


Id: 2/5

POWER | Protected-pack charger, regulator and voltage sensing

USB100 fixed (90mA guaranteed-min input). Protected 4.2V pack only. No automatic cell-temperature sensing.

U6
BQ24074RGTR

U4
AP2112K-3.3TRG1

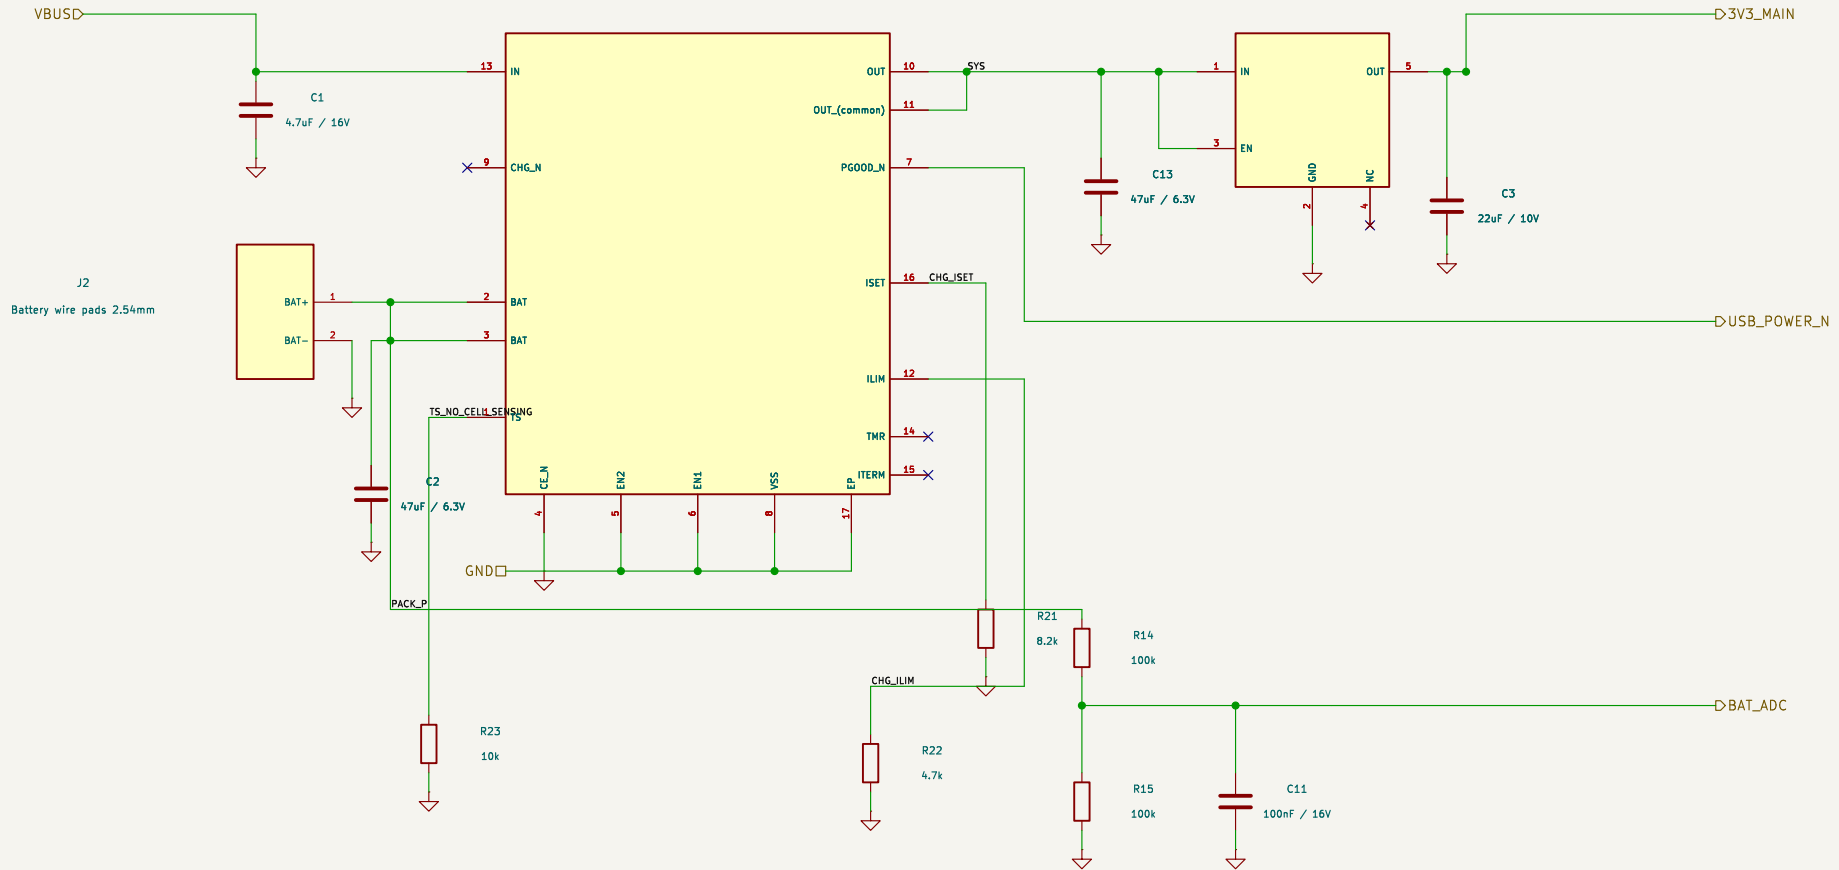

NO cell sensing: TS 10k bias. TMR / ITERM open; CE / EN1 / EN2 grounded.

Supervised off-body charging only. Qualified protected pack: >=121mA / 4.23V acceptance.

ENGINEERING PROTOTYPE – NO MANUFACTURING OR CHARGE APPROVAL

Sheet: /Power/
File: power.kicad_sch

Title: sMove R2 / Power

Size: A4
KiCad E.D.A. 9.0.8

Date:

Rev: R2 ENG

Id: 3/5

