


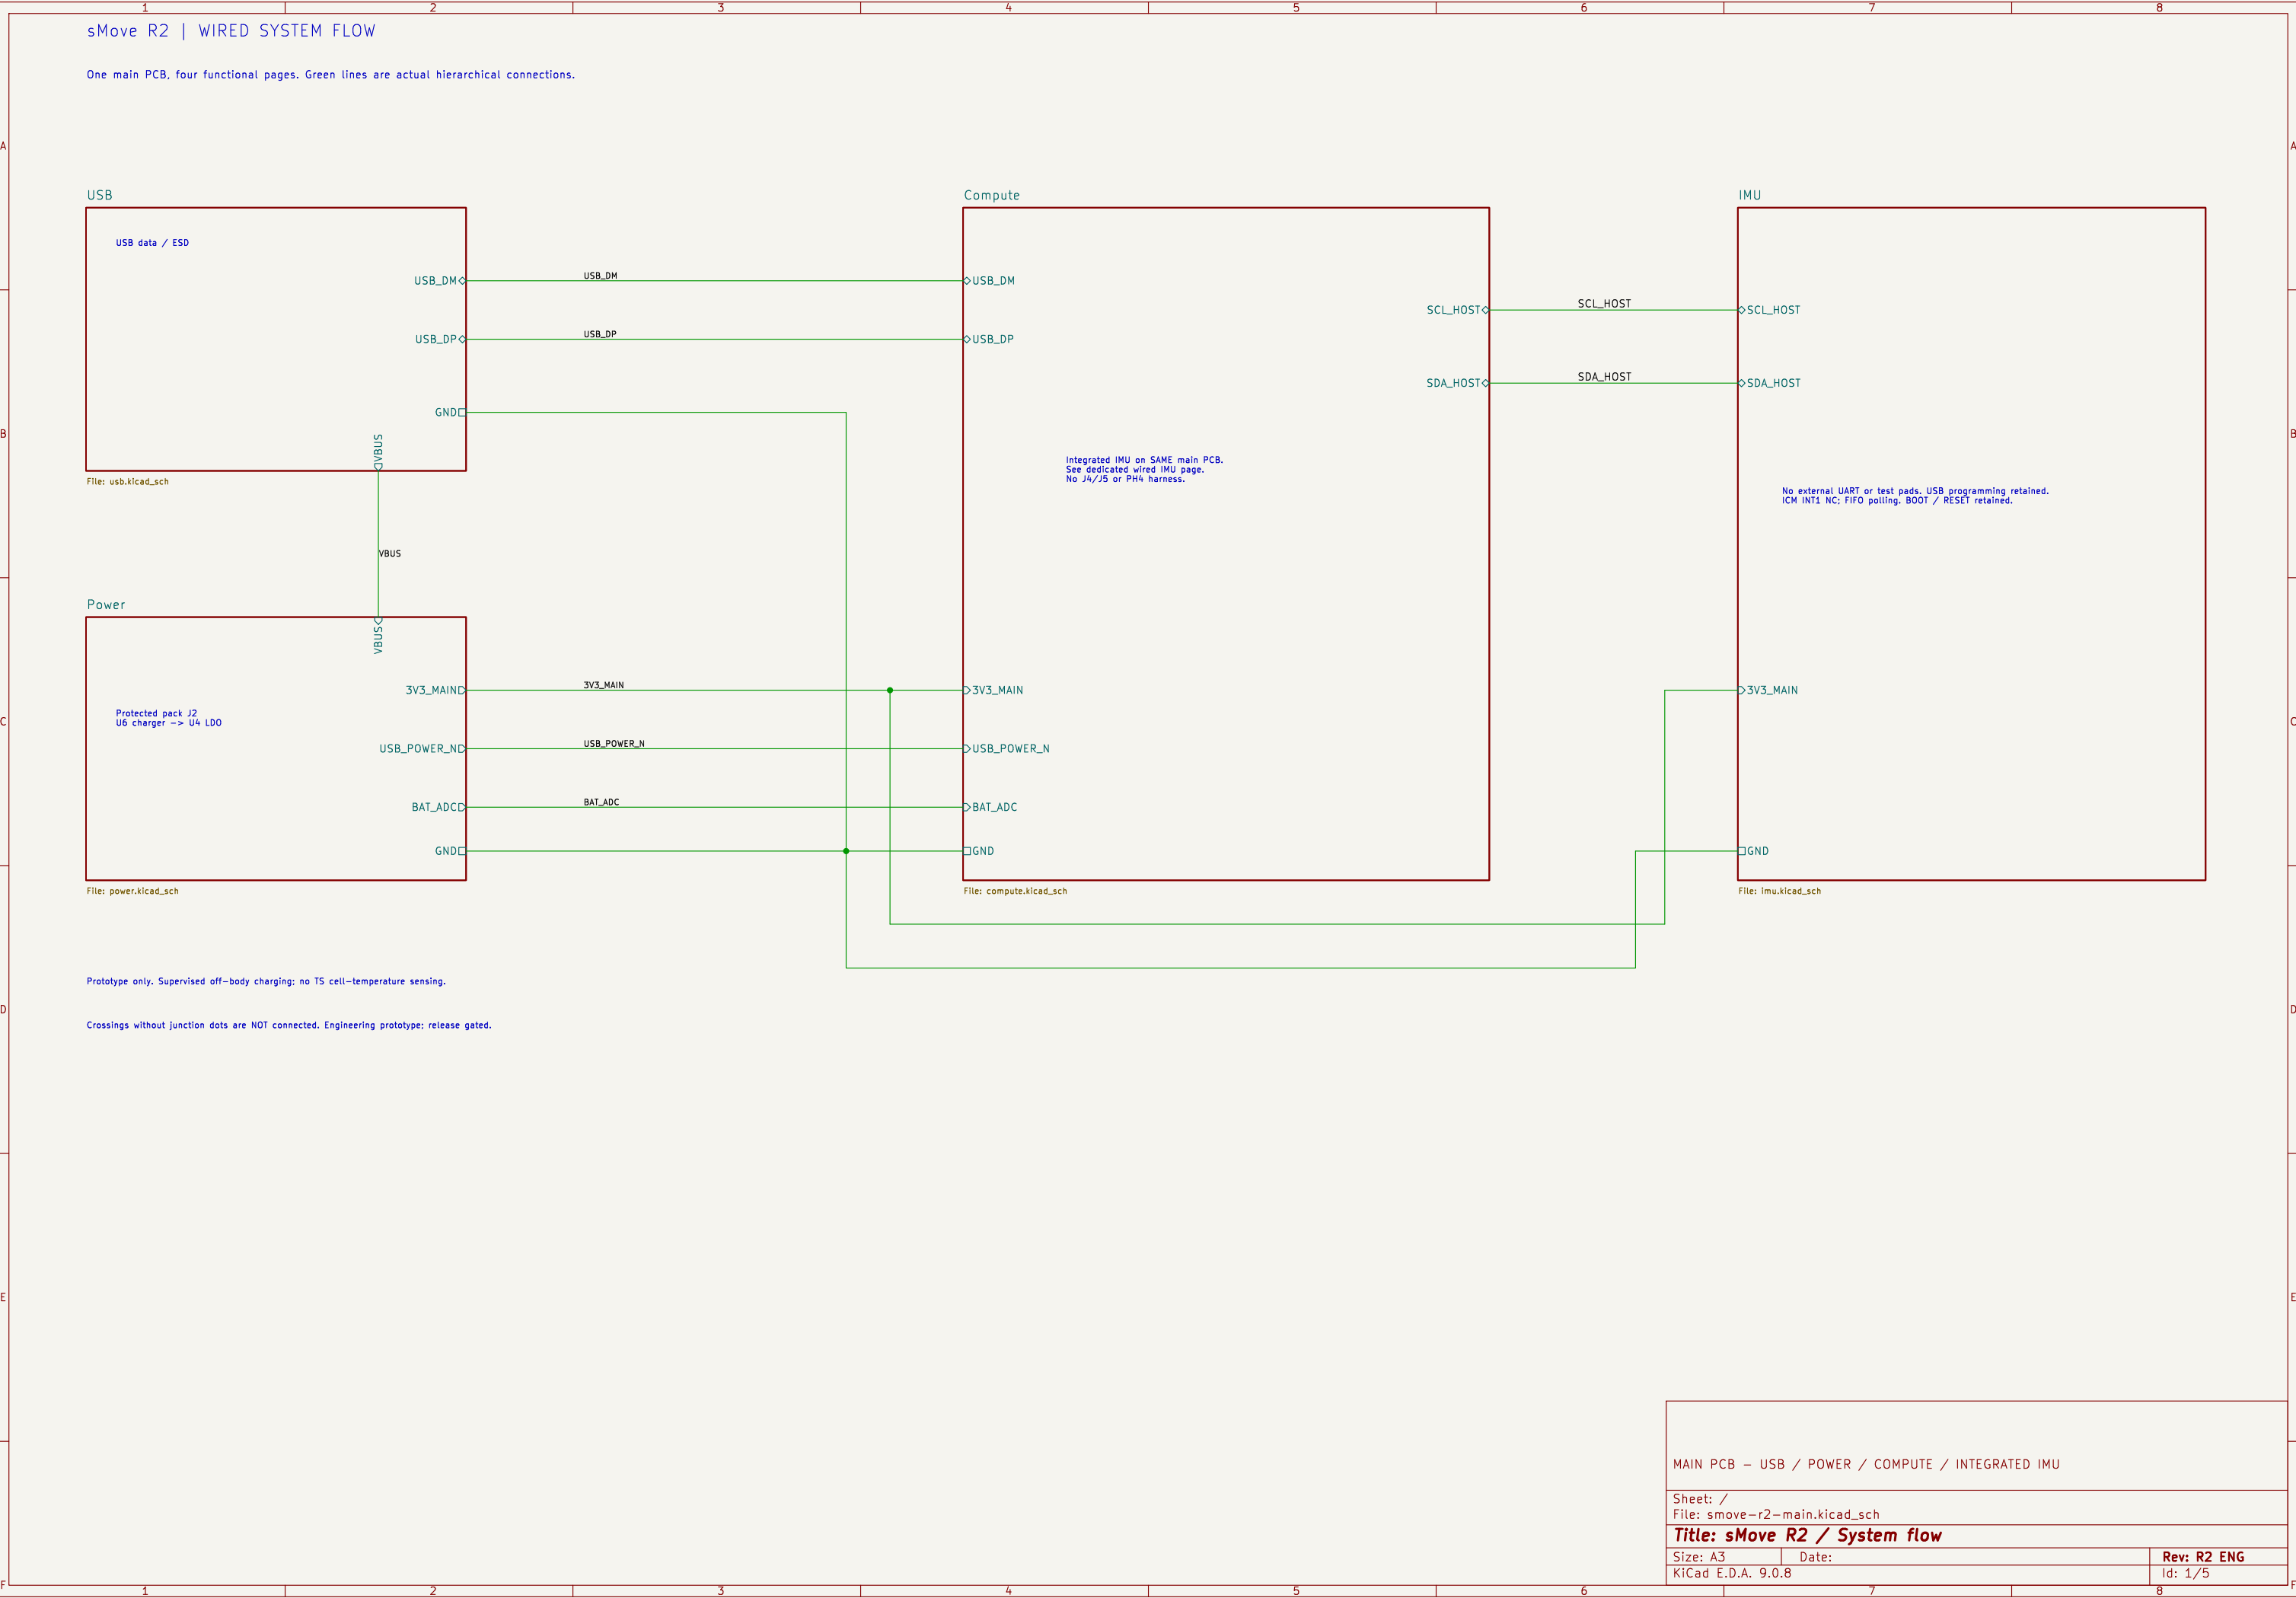

USB | Type-C receptacle, data ESD and CC termination

Native USB: disconnect before host sleep/off. ROM/crash does not enforce data isolation.

ENGINEERING PROTOTYPE – NO MANUFACTURING OR CHARGE APPROVAL

Sheet: /USB/
File: usb.kicad_sch

Title: sMove R2 / USB

Size: A4 Date: Rev: R2 ENG

KiCad E.D.A. 9.0.8 Id: 2/5

Sheet: /USB/		D
File: usb.kicad_sch		
Title: sMove R2 / USB		
Size: A4	Date:	
KiCad E.D.A. 9.0.8	Rev: R2 ENG	
	Id: 2/5	

USB100 fixed (90mA guaranteed—min input). Protected 4.2V pack only. No automatic cell—temperature sensing.




ENGINEERING PROTOTYPE – NO MANUFACTURING OR CHARGE APPROVAL


Title: sMove R2 / Power

Date:

Rev: R2 ENG

Id: 3/5

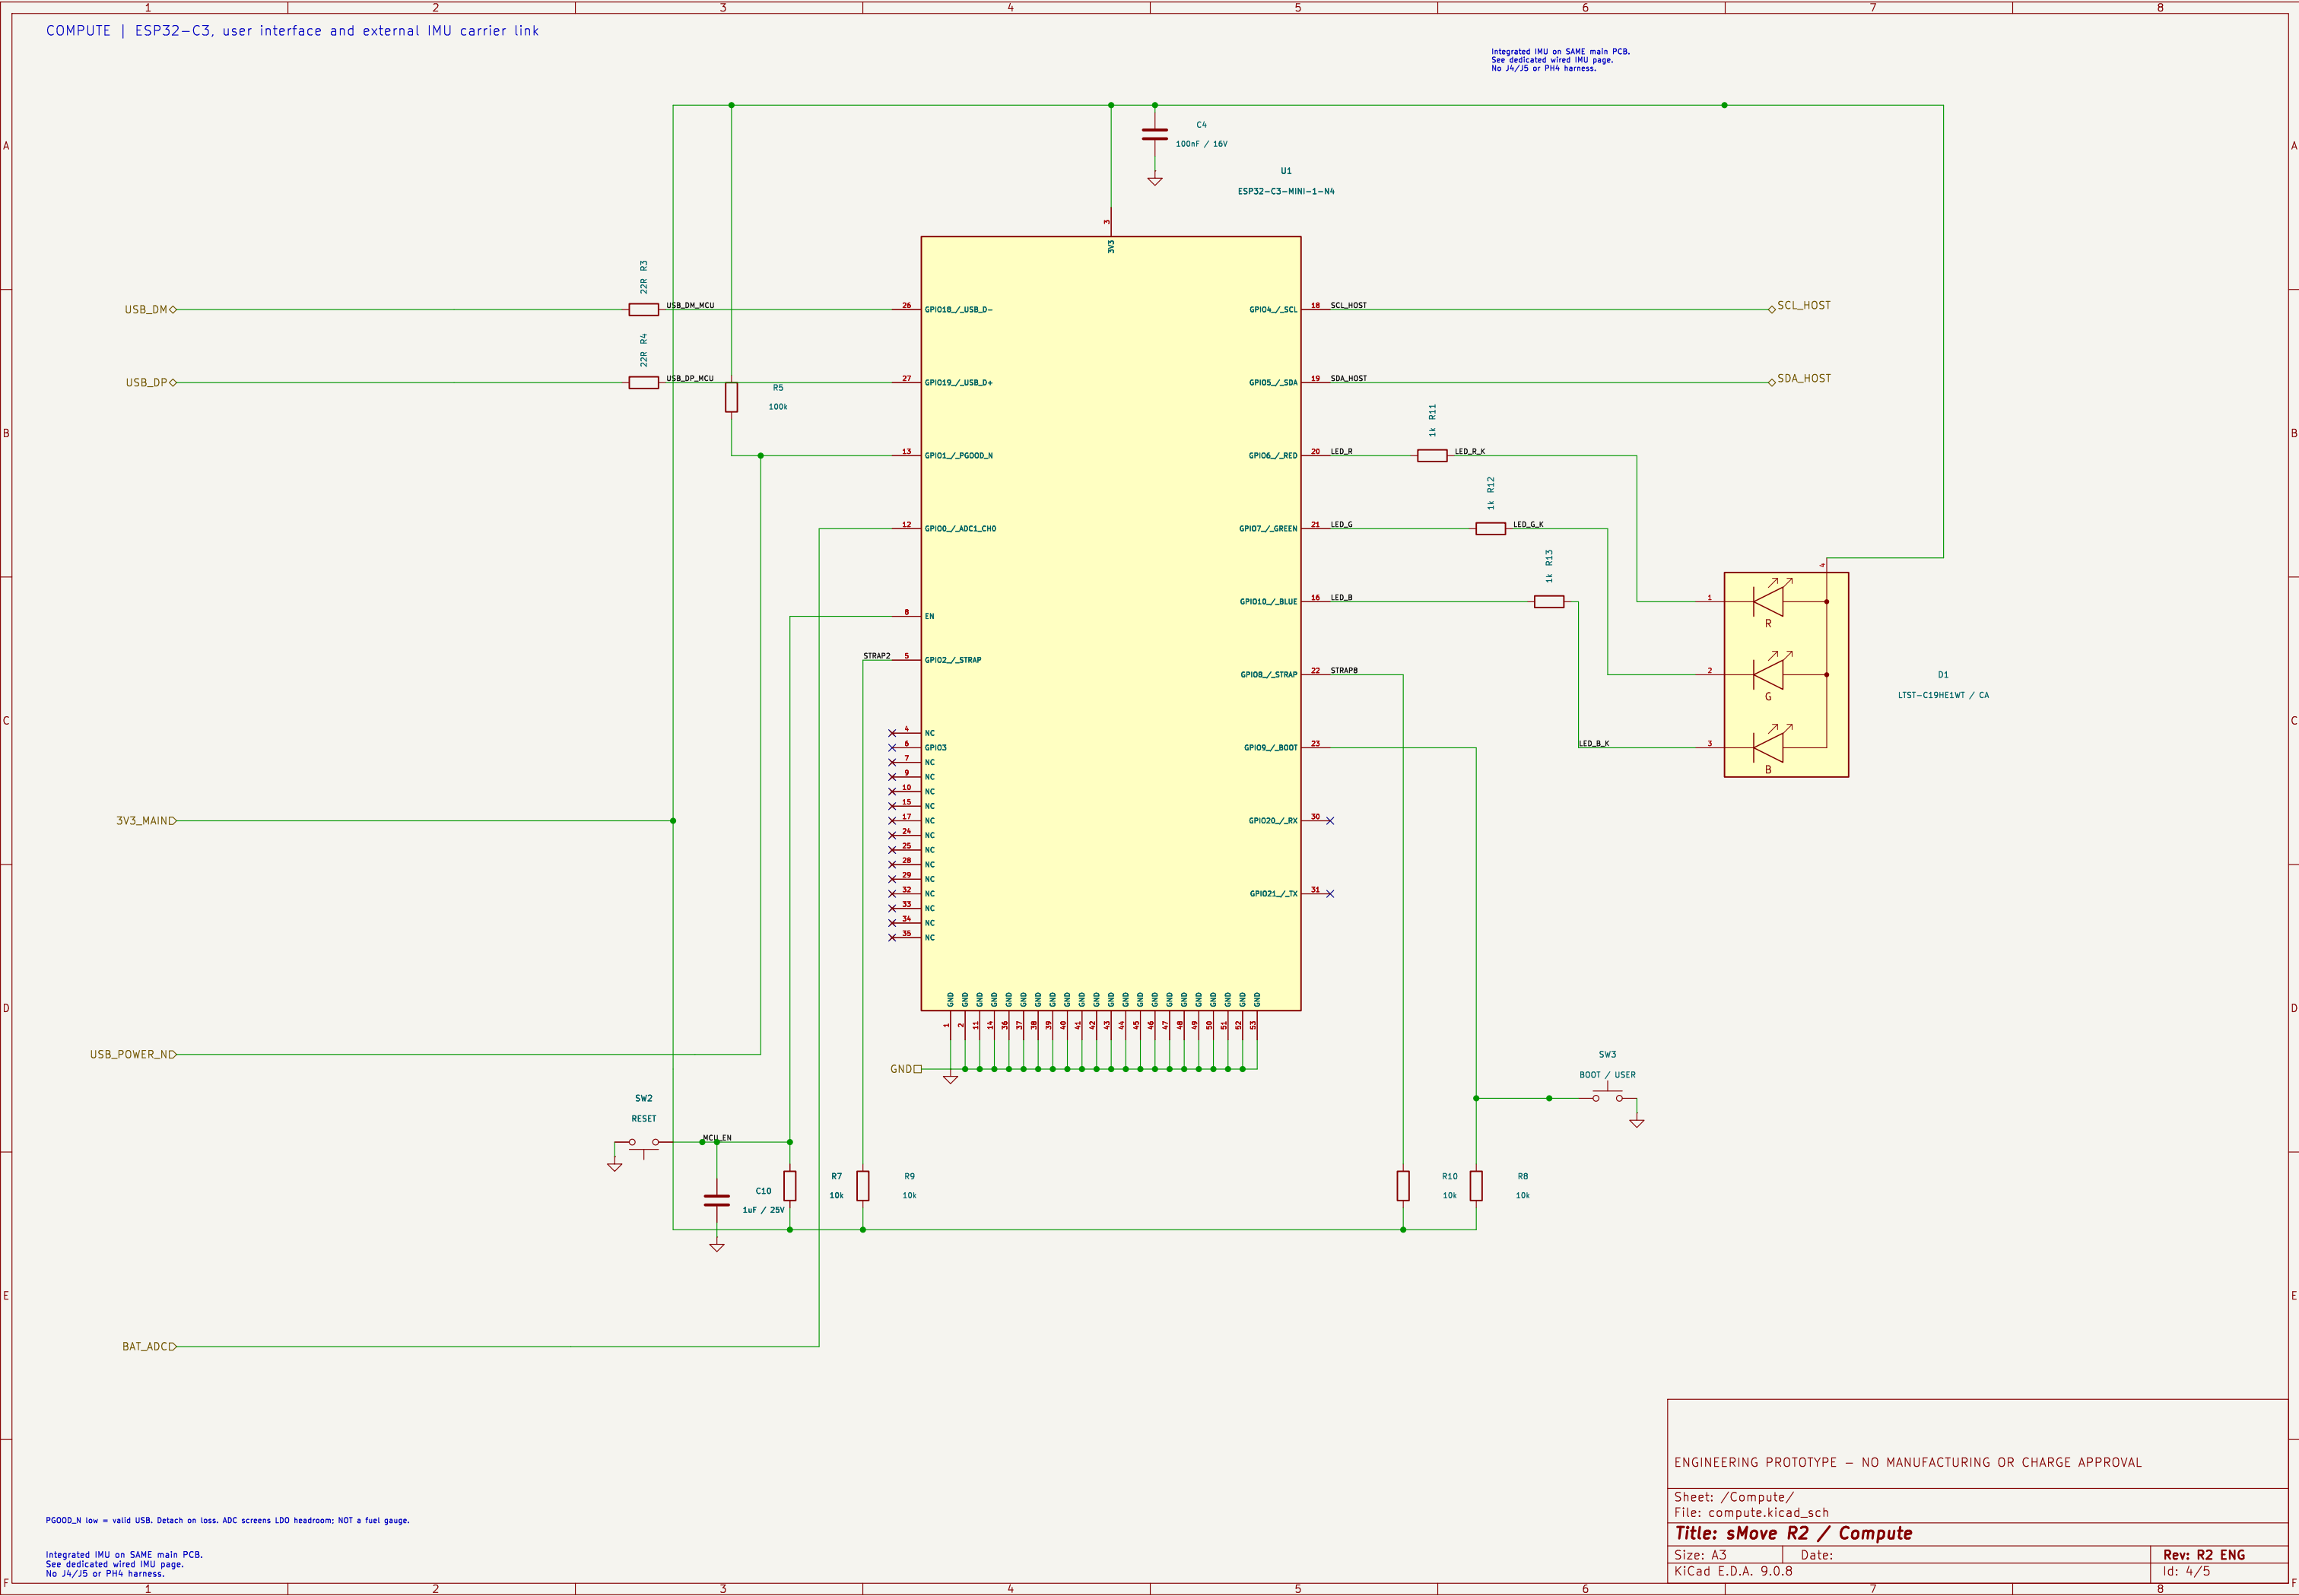

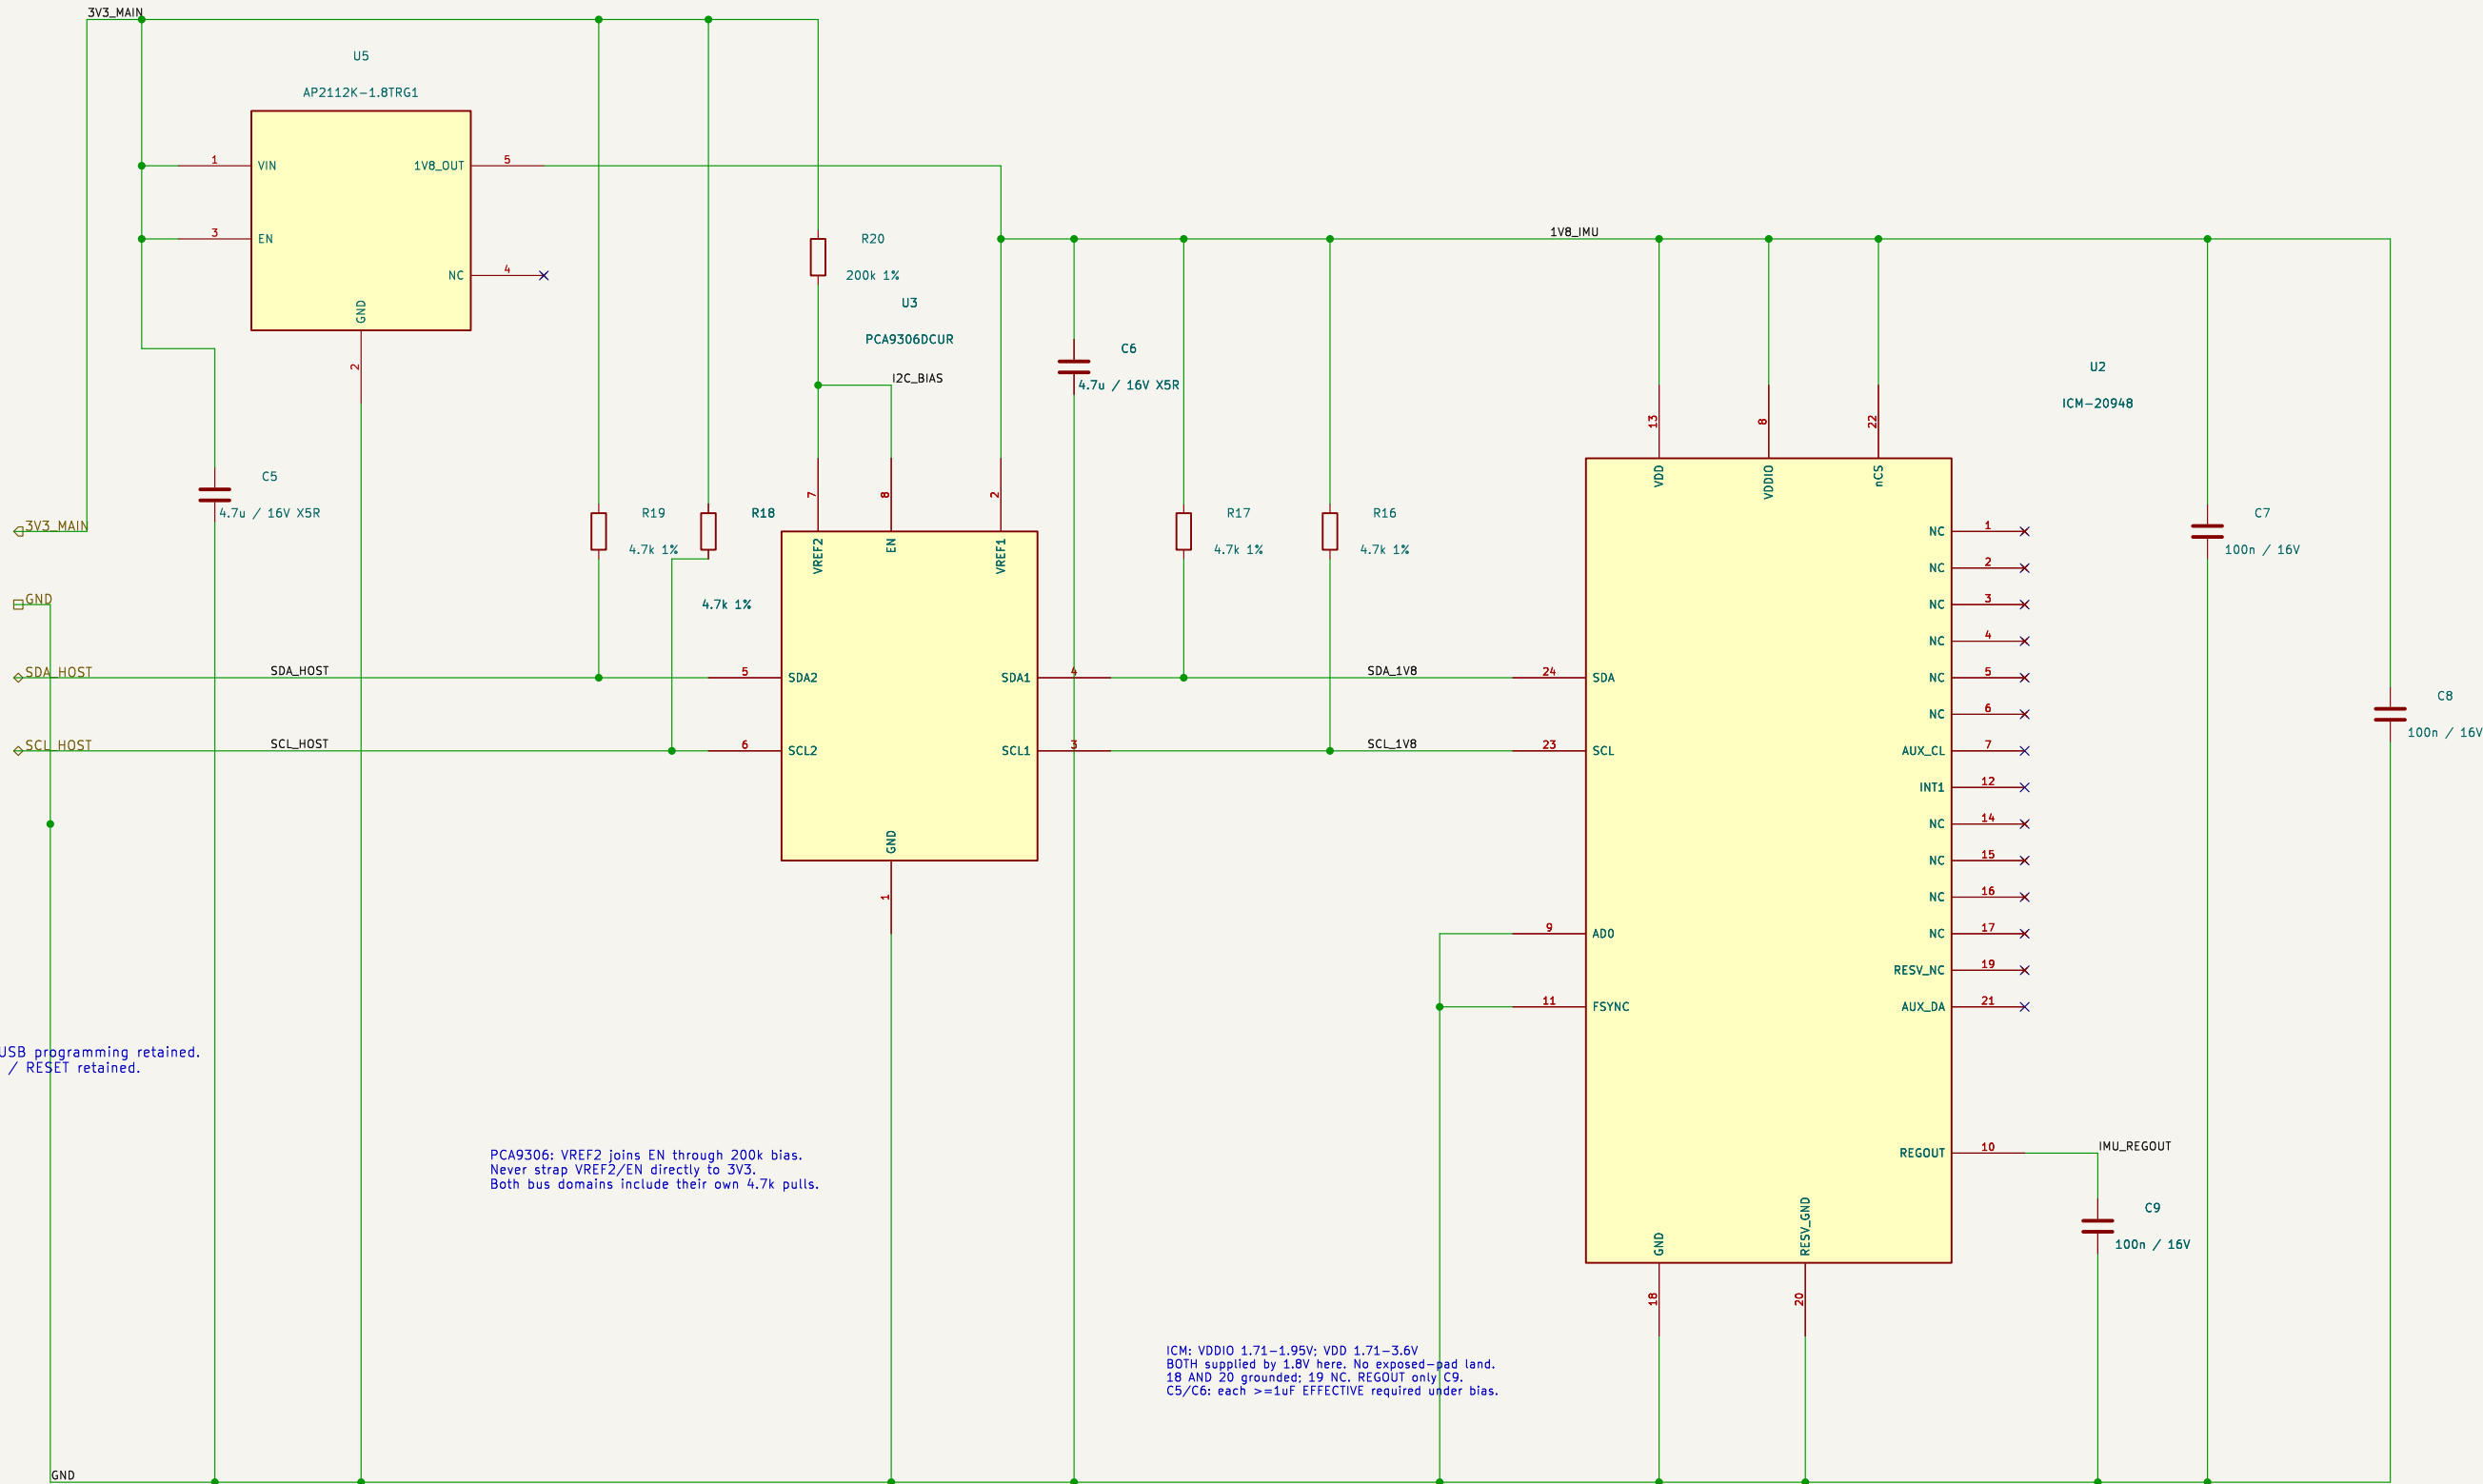

No external UART or test pads. USB prgramming retained.
ICM INT1 NC: FIFO polling. BOOT / RESET retained.

PCA9306: VREF2 joins EN through 200k bias.
Never strap VREF2/EN directly to 3V3.
Both bus domains include their own 4.7k pulls.

ICM: VDDIO 1.71-1.95V; VDD 1.71-3.6V
BOTH supplied by 1.8V here. No exposed-pad land.
18 AND 20 grounded; 19 NC. REGOUT only C9.
C5/C6: each >=1uF EFFECTIVE required under bias.

100kHz I2C, address 0x68; FIFO polling. INT1 NC; no testpoints.
U2 F.Cu at native (112.50,117.50)mm: upper-centre: AG +Z, OUTWARD, raw MAG +Z INWARD.
Two diagonal M3 mounts; nonmagnetic hardware and rigid fit require qualification.

Actual carrier circuitry transferred; no sensor substitution; +Z outward

Sheet: /IMU/
File: imu.kicad_sch

Title: sMove / integrated ICM-20948 / SAME main PCB

Size: A3	Date:	Rev: C1
KiCad E.D.A. 9.0.8		Id: 5/5