

sMove R2 MAIN | one-sheet wiring | ENGINEERING PROTOTYPE

USB100 fixed (90mA guaranteed-min input). Protected 4.2V pack only. No automatic cell-temperature sensing.

PH4: 1=3V3, 2=GND, 3=SDA, 4=SCL  
 <=50mm; carrier owns pulls + 1V8 + translation.

Native USB: disconnect before host sleep/off. ROM/crash does not enforce data isolation.  
 R2 5.1k  
 U6 BQ24074RGTR

PGOOD\_N low = valid USB. Firmware detach on loss. ADC is an LDO headroom screen, NOT a fuel gauge.

NO CELL TEMP SENSING – QUALIFIED SUPERVISED BENCH ONLY


Sheet: /  
 File: smove-r2-main.kicad\_sch  
**Title: sMove R2 MAIN**  
 Size: A3 Date:  
 KiCad E.D.A. 9.0.8 Rev: R2 ENG  
 Id: 1/1

sMove R2 MAIN | one-sheet wiring | ENGINEERING PROTOTYPE

USB100 fixed (90mA guaranteed-min input). Protected 4.2V pack only. No automatic cell-temperature sensing.

NO CELL TEMP SENSING – QUALIFIED SUPERVISED BENCH ONLY

Sheet: /  
File: smove-r2-main.kicad\_sch  
**Title: sMove R2 MAIN**  
Size: A3 Date:  
KiCad E.D.A. 9.0.8 Rev: R2 ENG  
Id: 1/1

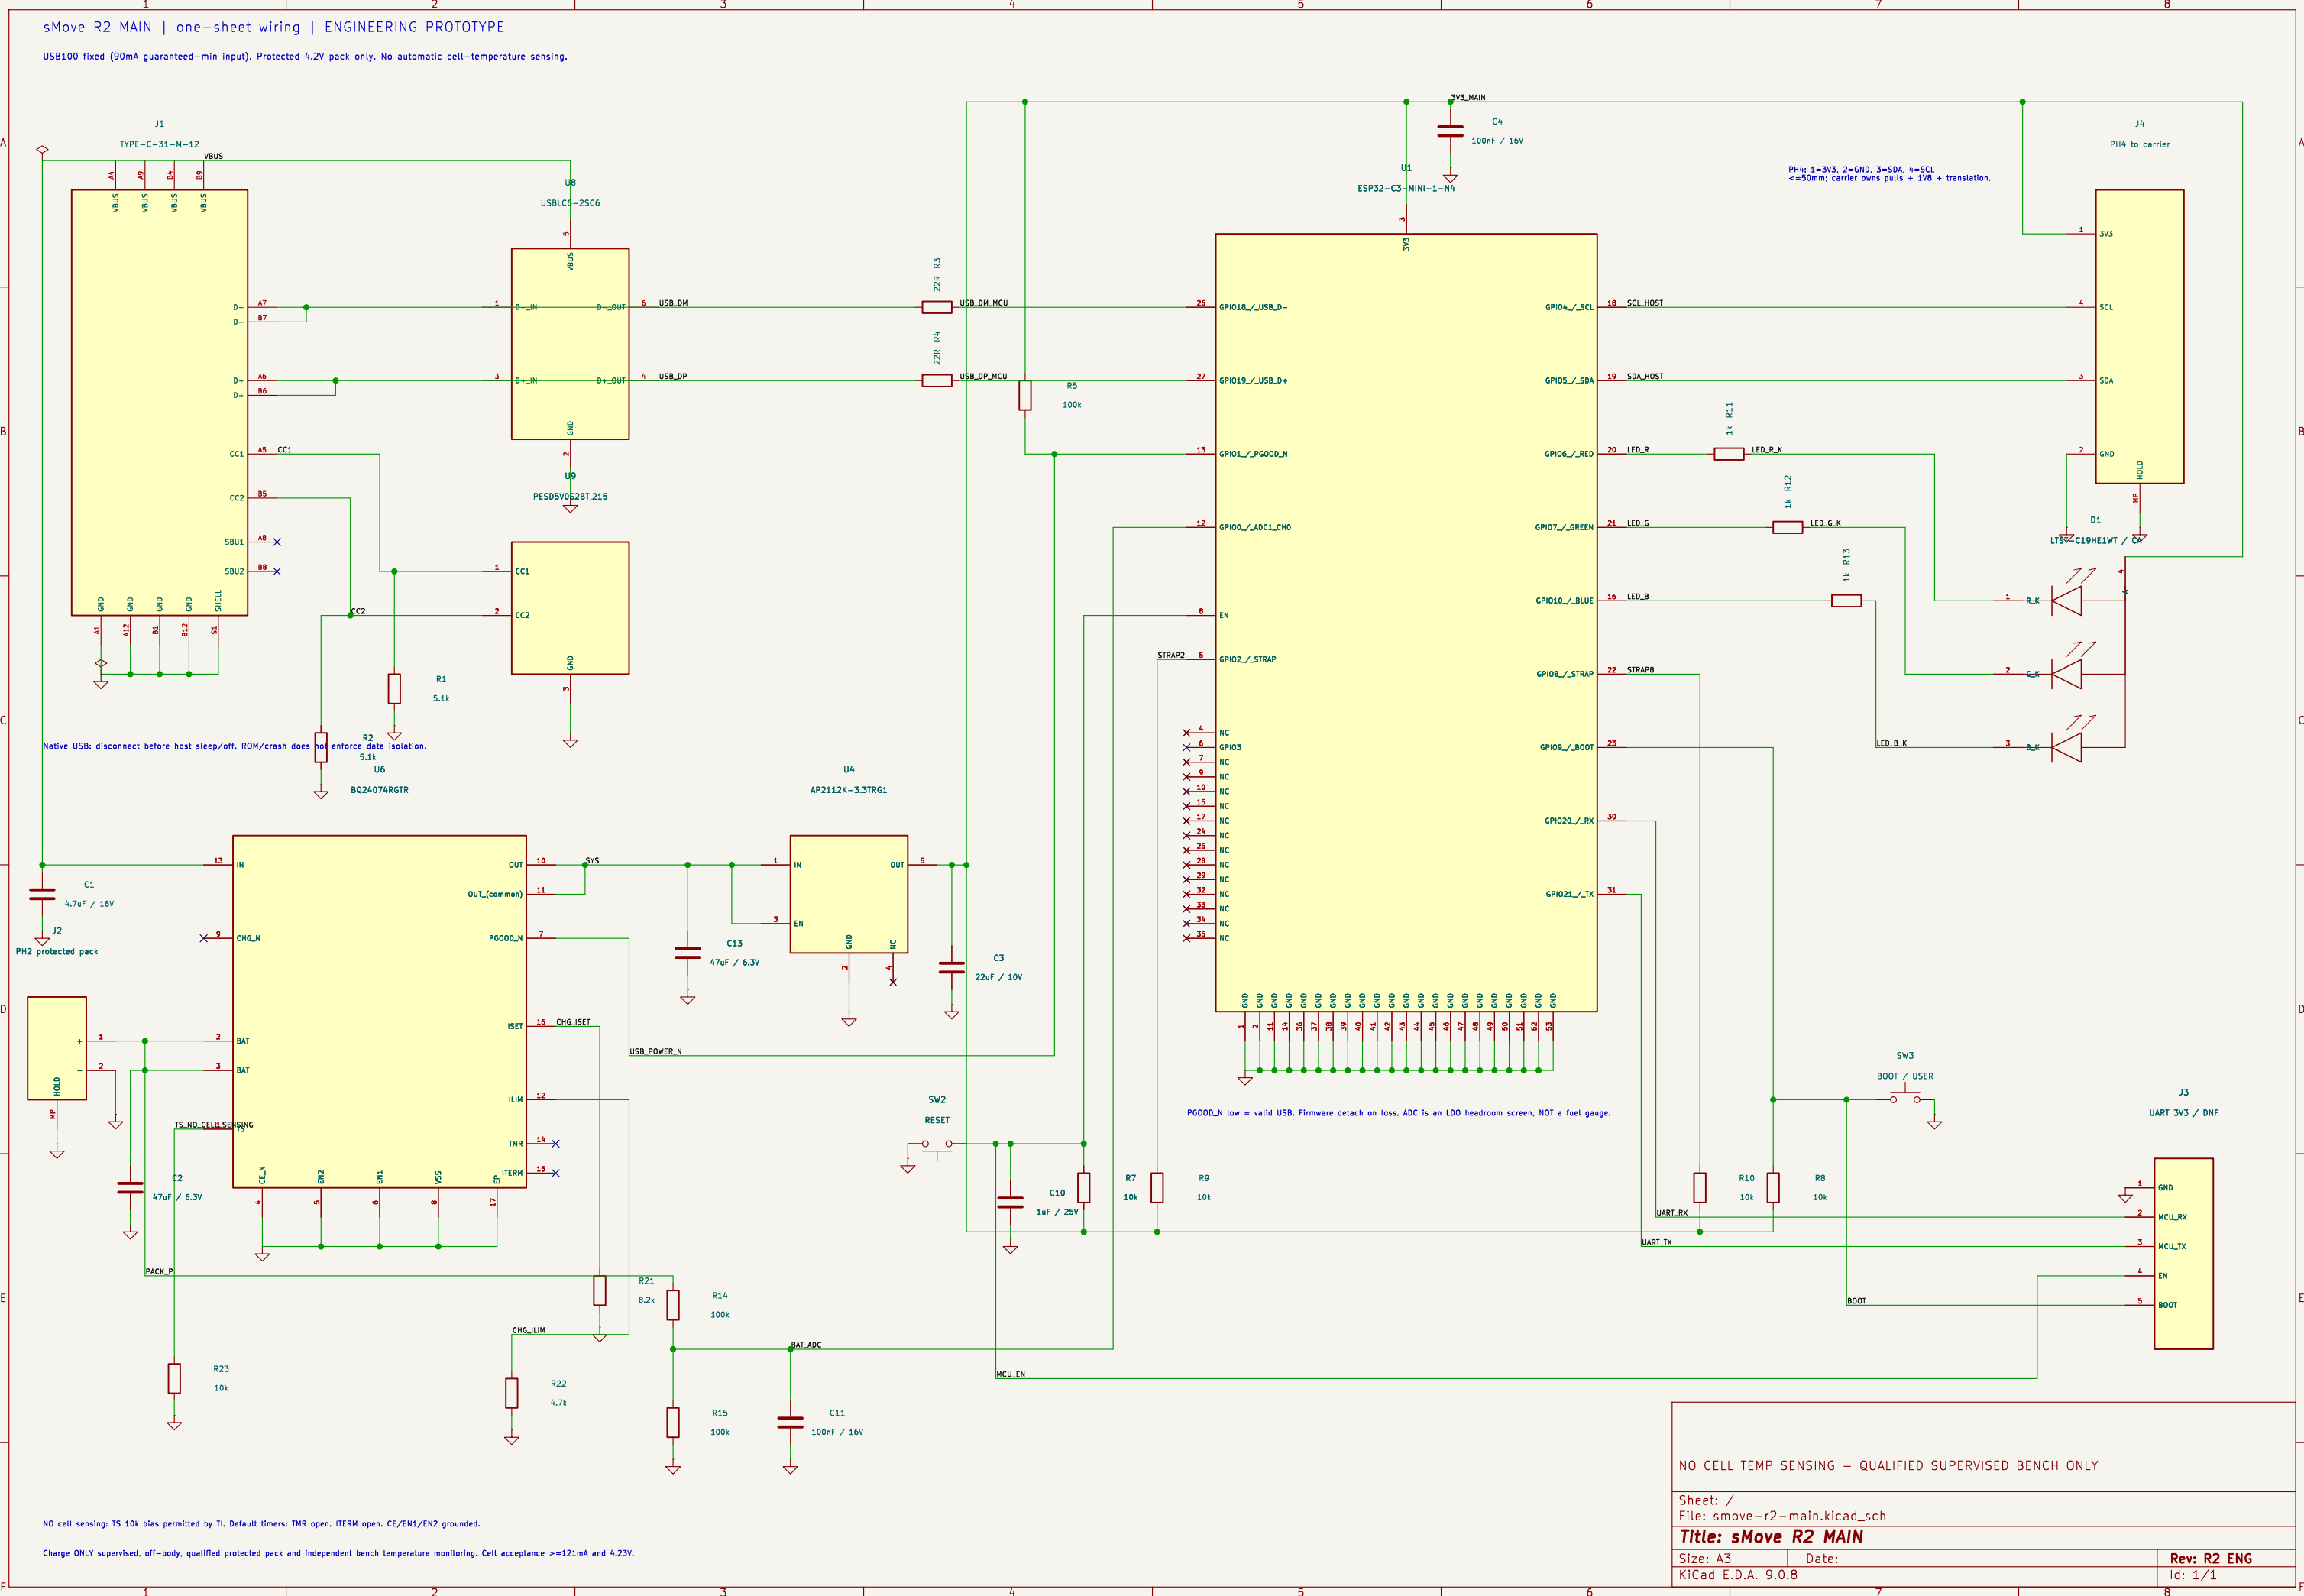

sMove R2 MAIN | one-sheet wiring | ENGINEERING PROTOTYPE

USB100 fixed (90mA guaranteed-min input). Protected 4.2V pack only. No automatic cell-temperature sensing.

PH4: 1=3V3, 2=GND, 3=SDA, 4=SCL  
 <=50mm; carrier owns pulls + 1V8 + translation.

Native USB: disconnect before host sleep/off. ROM/crash does not enforce data isolation.  
 R2 5.1k  
 U6 BQ24074RGTR

PGOOD\_N low = valid USB. Firmware detach on loss. ADC is an LDO headroom screen, NOT a fuel gauge.

NO CELL TEMP SENSING – QUALIFIED SUPERVISED BENCH ONLY

|                                           |                               |
|-------------------------------------------|-------------------------------|
| Sheet: /<br>File: smove-r2-main.kicad_sch |                               |
| <b>Title: sMove R2 MAIN</b>               |                               |
| Size: A3                                  | Date:                         |
| KiCad E.D.A. 9.0.8                        | <b>Rev: R2 ENG</b><br>Id: 1/1 |

sMove R2 MAIN | one-sheet wiring | ENGINEERING PROTOTYPE

USB100 fixed (90mA guaranteed-min input). Protected 4.2V pack only. No automatic cell-temperature sensing.

NO CELL TEMP SENSING – QUALIFIED SUPERVISED BENCH ONLY

Sheet: /  
File: smove-r2-main.kicad\_sch  
**Title: sMove R2 MAIN**  
Size: A3 Date:  
KiCad E.D.A. 9.0.8 Rev: R2 ENG Id: 1/1

|                    |       |             |
|--------------------|-------|-------------|
| Size: A3           | Date: | Rev: R2 ENG |
| KiCad E.D.A. 9.0.8 |       | Id: 1/1     |

|                    |       |             |
|--------------------|-------|-------------|
| Size: A3           | Date: | Rev: R2 ENG |
| KiCad E.D.A. 9.0.8 |       | Id: 1/1     |