



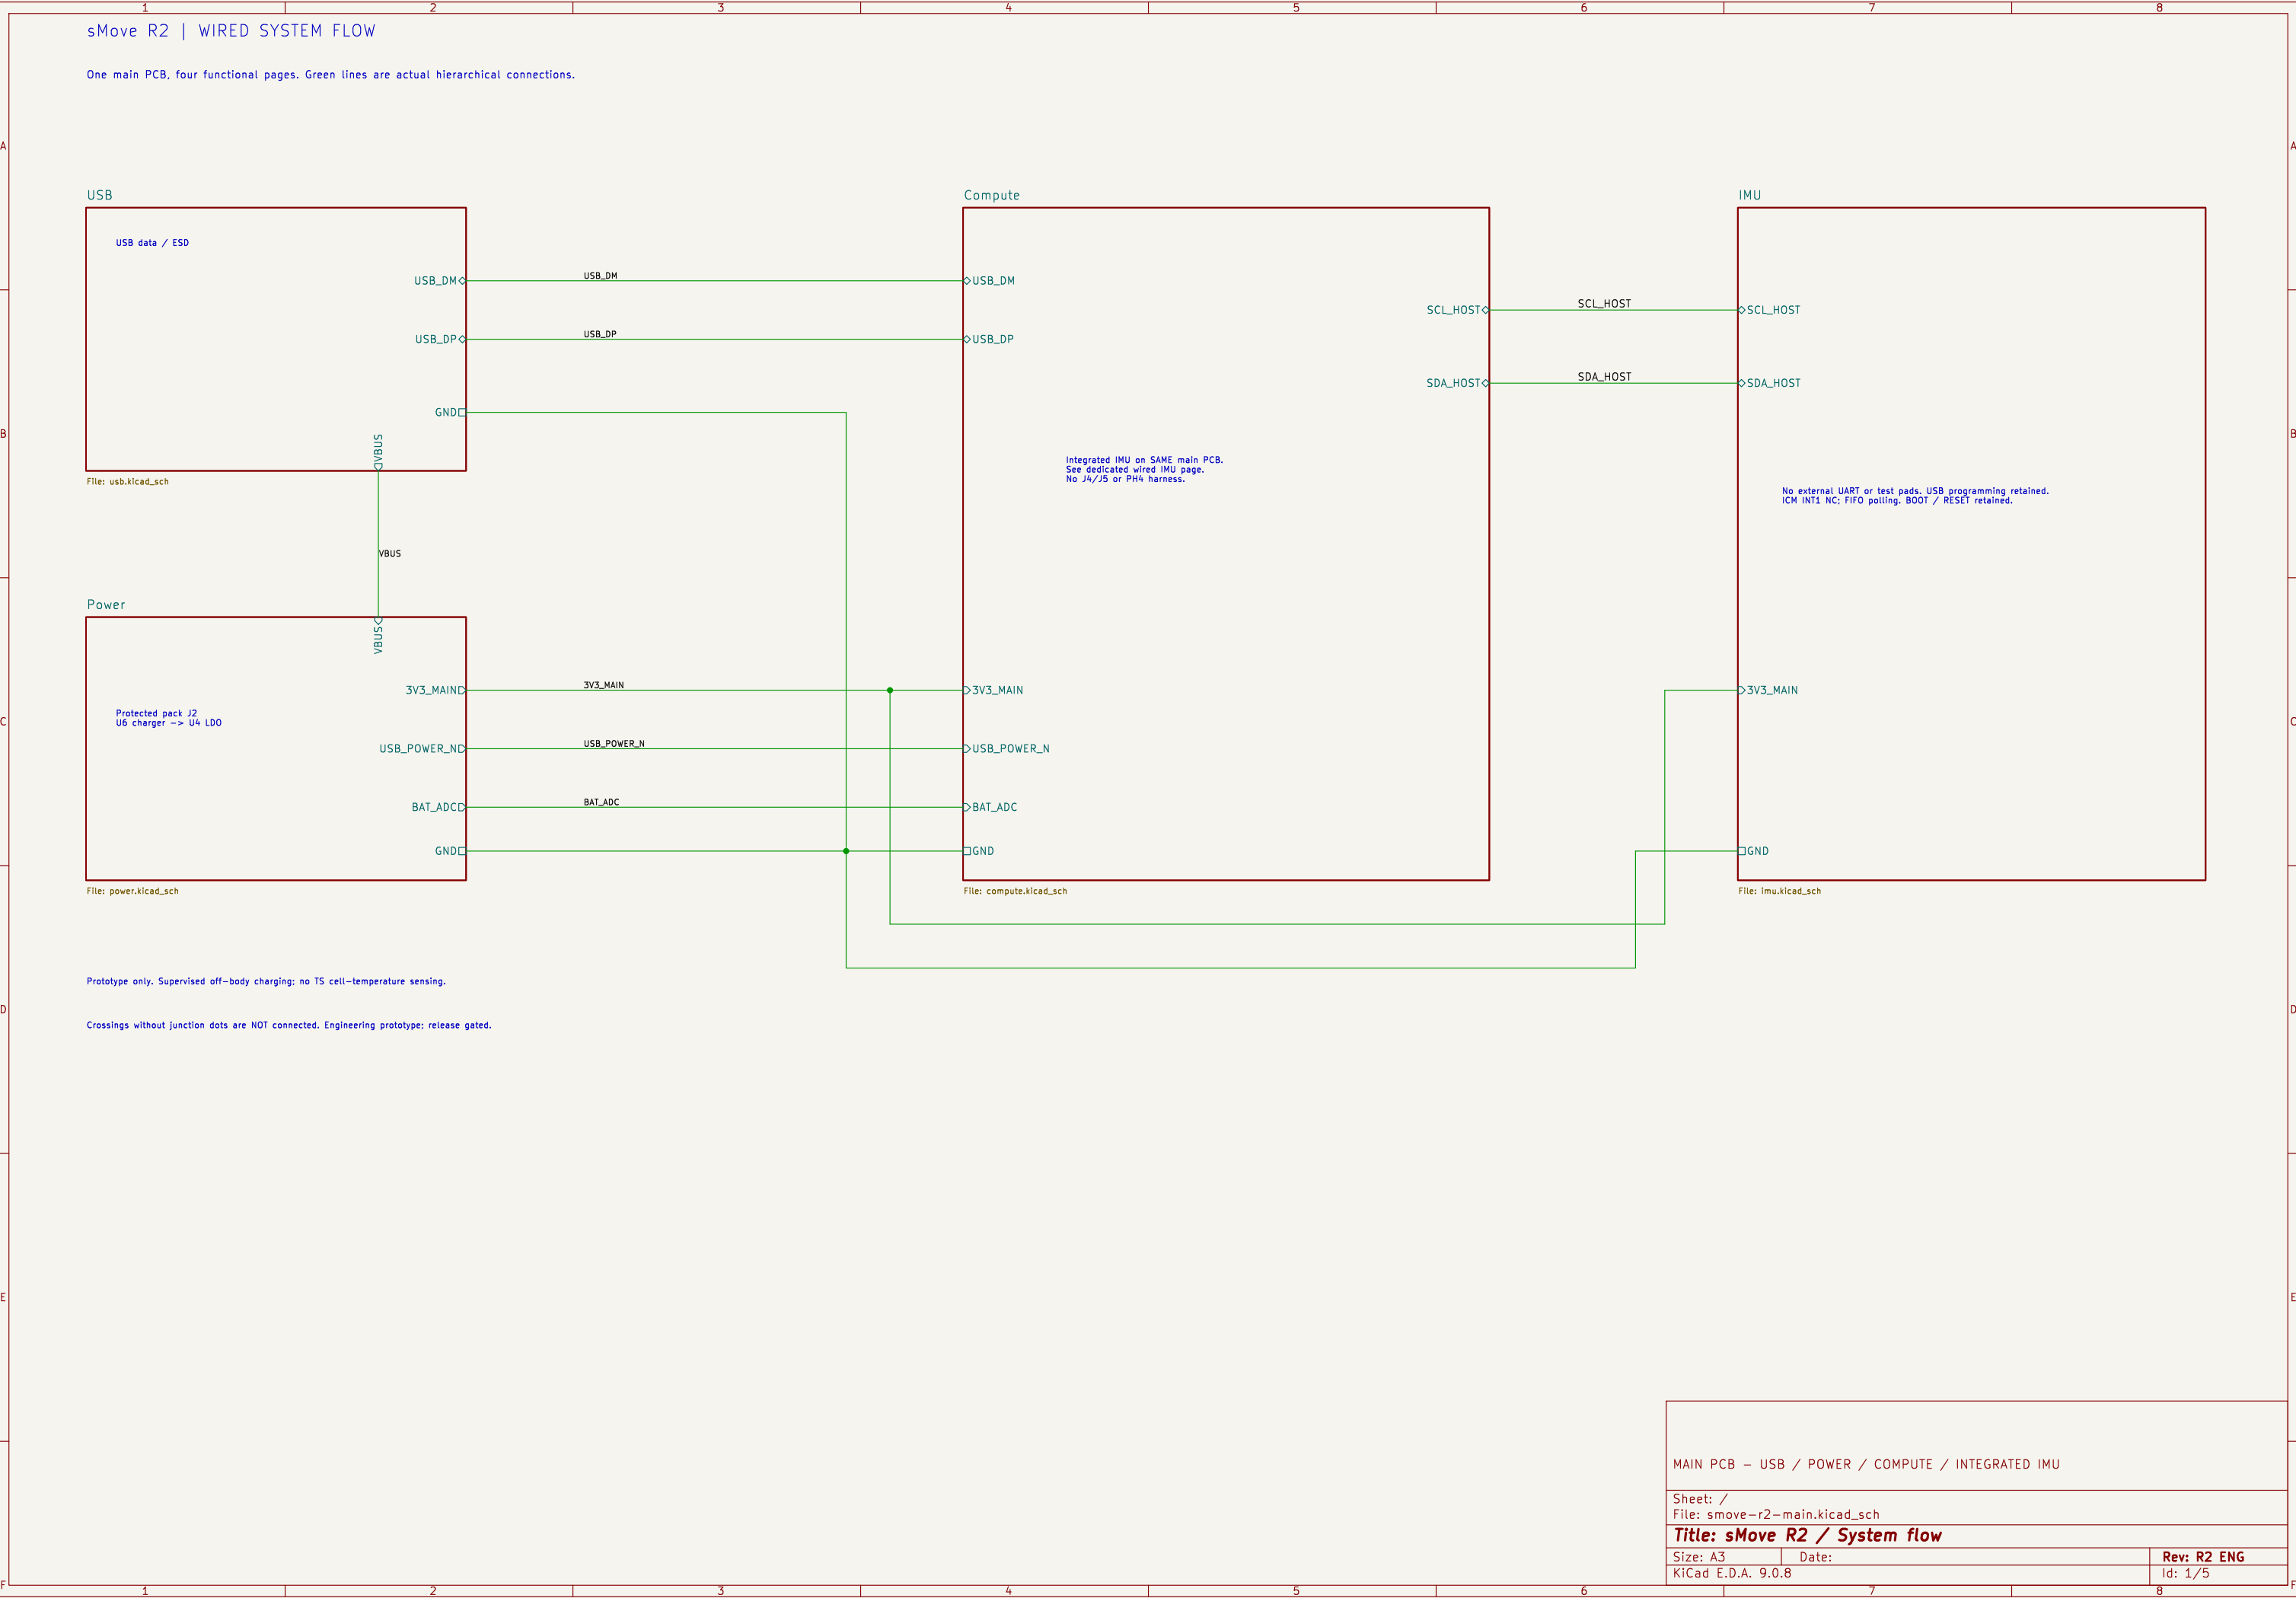

USB | Type-C receptacle, data ESD and CC termination

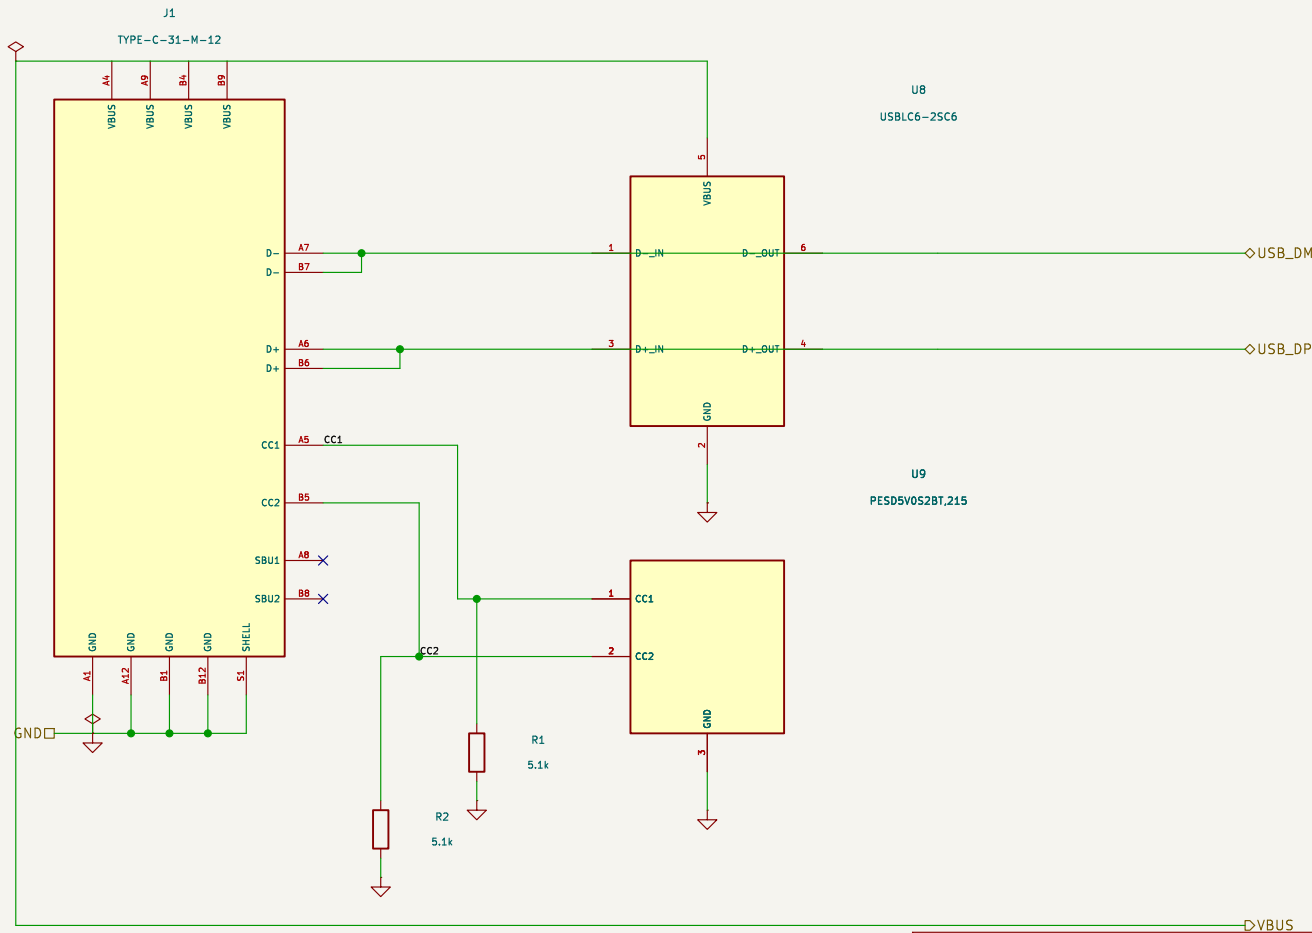

Native USB: disconnect before host sleep/off. ROM/crash does not enforce data isolation.

ENGINEERING PROTOTYPE – NO MANUFACTURING OR CHARGE APPROVAL

Sheet: /USB/
File: usb.kicad_sch

Title: **sMove R2 / USB**

Size: A4

Date:

KiCad E.D.A. 9.0.8

Rev: **R2 ENG**

Id: 2/5

USB100 fixed (90mA guaranteed—min input). Protected 4.2V pack only. No automatic cell—temperature sensing.



Supervised off-body charging only. Qualified protected pack: $\geq 121\text{mA}$ / 4.23V acceptance.

Sheet: /Power/
File: power.kicad_sch

Title: sMove R2 / Power

Size: A4	
KiCad E.D.A. 9.0.8	

Date:

Rev: R2 ENG

Id: 3/5

