


sMove R2 | WIRED SYSTEM FLOW

One main PCB, three functional pages. Green lines are electrical hierarchical connections.

USB



Power

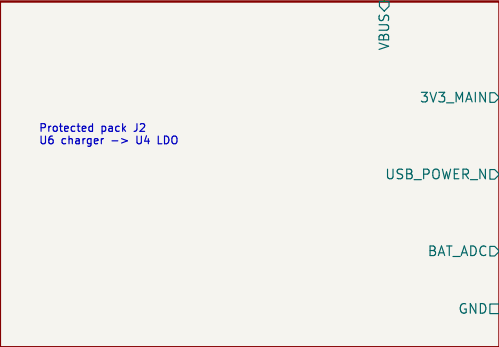

Compute




Prototype only. Supervised off-body charging; no TS cell-temperature sensing.

Crossings without junction dots are NOT connected. Placement and routing unchanged.

MAIN PCB – THREE FUNCTIONAL CHILD PAGES

Sheet: /		
File: smove-r2-main.kicad_sch		
Title: sMove R2 / System flow		
Size: A4	Date:	Rev: R2 ENG
KiCad E.D.A. 9.0.8		Id: 1/4

USB | Type-C receptacle, data ESD and CC termination

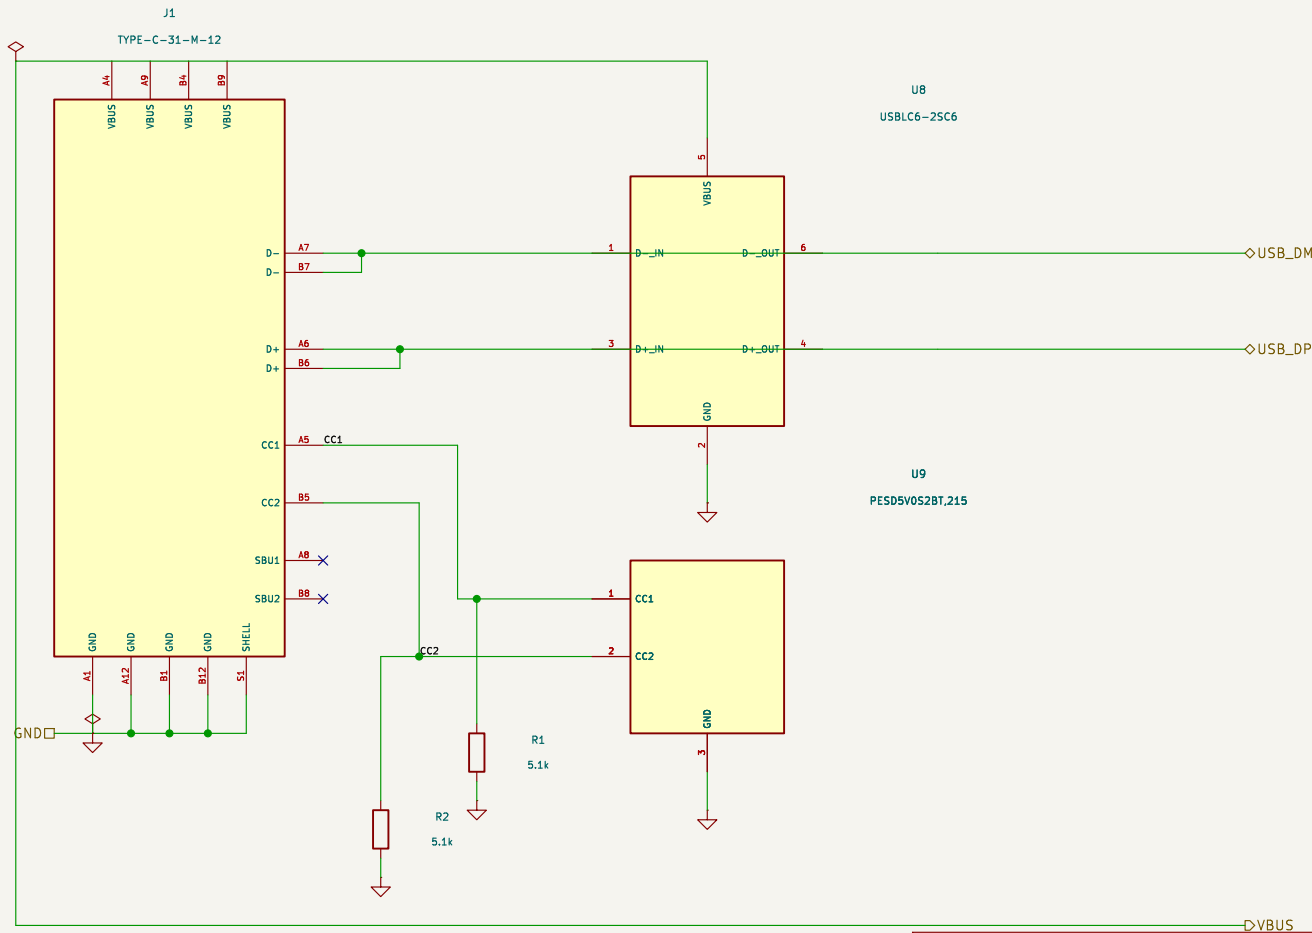

Native USB: disconnect before host sleep/off. ROM/crash does not enforce data isolation.

ENGINEERING PROTOTYPE – NO MANUFACTURING OR CHARGE APPROVAL

Sheet: /USB/ File: usb.kicad_sch		
Title: sMove R2 / USB		
Size: A4	Date:	Rev: R2 ENG
KiCad E.D.A. 9.0.8		Id: 2/4

USB100 fixed (90mA guaranteed—min input). Protected 4.2V pack only. No automatic cell—temperature sensing.



Supervised off-body charging only. Qualified protected pack: $\geq 121\text{mA}$ / 4.23V acceptance.

Sheet: /Power/
File: power.kicad_sch

Title: sMove R2 / Power

Size: A4	
KiCad E.D.A. 9.0.8	

Date:

Rev: R2 ENG

Id: 3/4

