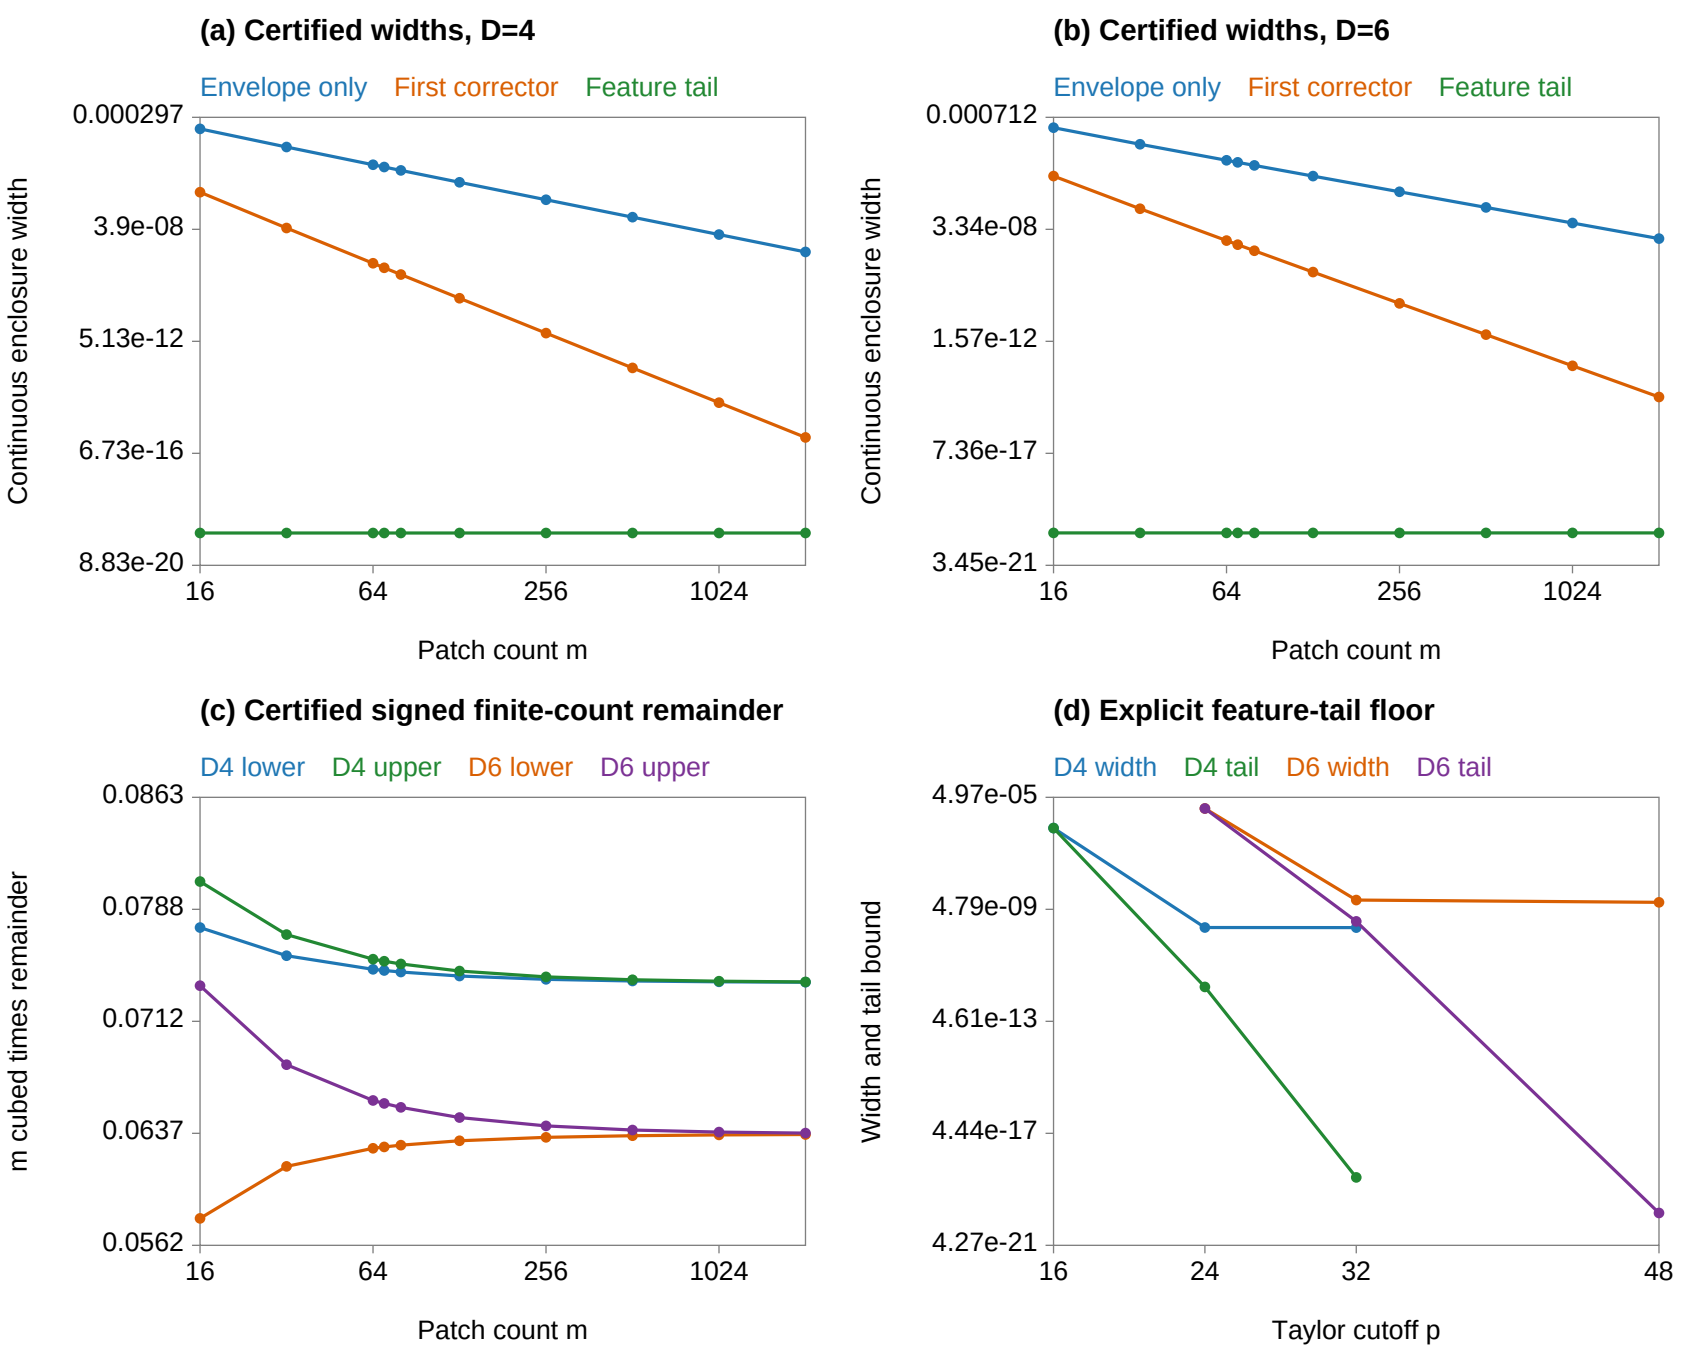
(a) Certified widths, D=4
Envelope only
First corrector
Feature tail
0.000297
3.9e-08
5.13e-12
6.73e-16
8.83e-20
Continuous enclosure width
16
64
256
1024
Patch count m
(b) Certified widths, D=6
Envelope only
First corrector
Feature tail
0.000712
3.34e-08
1.57e-12
7.36e-17
3.45e-21
Continuous enclosure width
16
64
256
1024
Patch count m
(c) Certified signed finite-count remainder
D4 lower
D4 upper
D6 lower
D6 upper
0.0863
0.0788
0.0712
0.0637
0.0562
m cubed times remainder
16
64
256
1024
Patch count m
(d) Explicit feature-tail floor
D4 width
D4 tail
D6 width
D6 tail
4.97e-05
4.79e-09
4.61e-13
4.44e-17
4.27e-21
Width and tail bound
16
24
32
48
Taylor cutoff p