
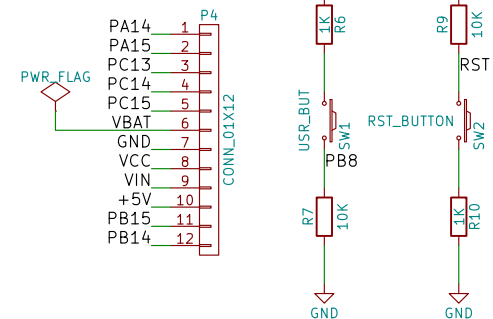
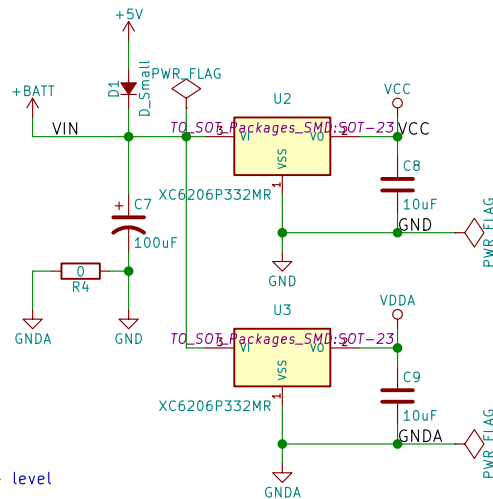


Control the USB disconnect Methods:

1. set PA12 to OUTPUT Mode and pull down the U+ level
2. set the PA12 back to INPUT floating Mode

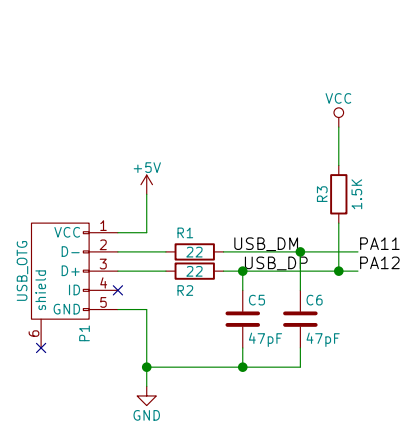

SMSLIT

Sheet: /
File: MicroMaple.sch

Title: Micro Maple

Size: A4 Date: 2016-10-08
KiCad E.D.A. kicad 4.0.4-stable

Rev: 1.1
Id: 1/1

