CEOTHERM ENDÜSTRİYEL FIRIN İMALAT SAN. VE TİC. LTD. ŞTİ.
Marmara Geri Dönüşümcüler San. Sit. Ayçiçek Sok.No:36 Çayırova, Kocaeli, TURKIYE
Tel: +90 262 658 11 64 Fax:+90 262 658 11 15
www.ceotherm.com & info@ceotherm.com

Customer References

Industrial furnace systems • Design • Manufacturing • Installation • Commissioning

About CEOTHERM

ENGINEERING • MANUFACTURING • TURNKEY SOLUTIONS


CEOTHERM Industrial Furnace Systems is a technology-driven engineering engineering company specializing in the design, engineering, manufacturing, installation, and commissioning of high-performance performance industrial furnaces, heat treatment systems, and auxiliary auxiliary process equipment for ferrous and non-ferrous metal industries. industries.


CORE EXPERTISE

- Aluminum melting, casting, and recycling plants
- Aluminum billet casting houses and homogenization facilities
- Aluminum extrusion and metal forming industries
- Ferrous and non-ferrous metal processing plants
- Heat treatment and annealing systems
- Industrial automation and process control systems
- Furnace modernization, capacity enhancement, and energy efficiency improvement projects

Our systems are designed with a strong focus on energy efficiency, operational reliability, process optimization, and sustainable manufacturing. By utilizing advanced combustion technologies, regenerative burner systems, and state-of-the-art automation solutions, we help our customers achieve lower fuel consumption, reduced carbon emissions, and higher production performance.

From project development and detailed engineering to turnkey commissioning, CEOTHERM is committed to delivering innovative, reliable, and long-lasting industrial solutions. This approach has established CEOTHERM as a trusted partner for aluminum, steel, and metal processing industries in both domestic and international markets.

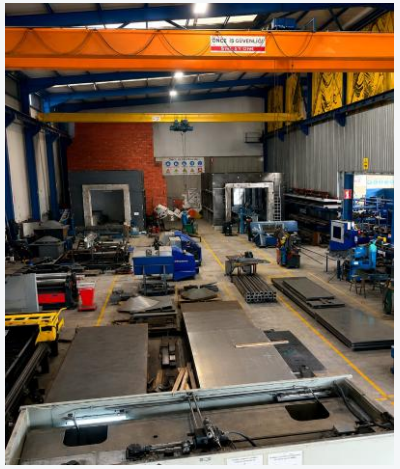

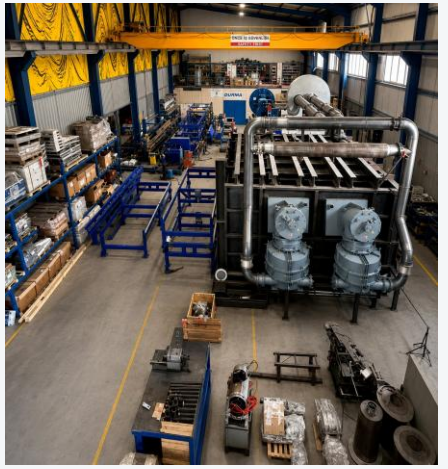





GÜLERMAK AGIR SANAYI INŞAAT VE TAAHHUT A.S.-ANKARA

SUCCESSFULLY DELIVERED - 2011

SCOPE OF SUPPLY

- 60 Tons/Charge Capacity Natural Gas Heated Stress Relieving Furnace

Parameter	Value
Maximum Capacity	60 tons/batch
Furnace Useful Dimensions	8.500 × 4.000 × 9.000 mm (W × H × L)
Furnace External Dimensions	10.765 ×6.500×10.910 mm (W × H × L)
Heating System	Direct Natural Gas
Total Heating Power	8000 kW
Maximum Temperature	900 °C
Operating Temperature	550-900 °C







GÜRGENLER İNŞAAT VE TESİSAT MALZEMELERİ SAN. TİC. A.Ş-ANKARA

SUCCESSFULLY DELIVERED - 2012

SCOPE OF SUPPLY

- 5 Tons/Charge Capacity Natural Gas Heated Annealing Furnace

Parameter	Value
Maximum Capacity	5 tons/batch
MaterialSteel materials	Steel materials
Furnace Useful Dimensions	2.500 × 2.500 × 3.500 mm (W × H × L)
Furnace Car Loading Dimensions	2.600 ×3.700 mm (W × L)
Heating System	Direct Natural Gas
Total Heating Power	1800 kW
Max. Heating Rate	300°C/h
Max. Furnace Temperature	1.300 °C
Operating Temperature	650-1.200 °C







DUDUOGLU ÇELIK DÖKÜM SANAYI A.S.-ÇORUM

SUCCESSFULLY DELIVERED - 2012

SCOPE OF SUPPLY

- 7 Tons/Charge Capacity Natural Gas Heated Annealing Furnace

Parameter	Value
Maximum Capacity	7 tons/batch
MaterialSteel materials	Steel materials
Furnace Useful Dimensions	1.600 × 1.300 × 2.500 mm (W × H × L)
Furnace External Dimensions	3.270 ×2.635x 3.450 mm (W × H x L)
Heating System	Direct Natural Gas
Total Heating Power	900 kW
Max. Heating Rate	170°C/h
Max. Furnace Temperature	1.100 °C
Operating Temperature	1.030 -1.050 °C





ÖZEN ÇELİK YAY LTD. ŞTİ.-İSTANBUL

SUCCESSFULLY DELIVERED - 2012

SCOPE OF SUPPLY

- 800 Kg/Batch Capacity Electrically Heated Bogie Hearth Tempering Furnace

Parameter	Value
Maximum Capacity	800 Kg /batch
MaterialSteel materials	Spring steels
Furnace Useful Dimensions	1.200 × 1.500 × 2.000 mm (W × H × L)
Furnace External Dimensions	2.620 ×2.565 x 3.790 mm (W ×H x L)
Heating System	Electrically heated
Heating Power	kW
Max. Furnace Temperature	600 °C
Furnace Operating Temperature	380 -600 °C
Material Loading & Unloading	By loading bogie





GİSAŞ DÖKÜM MAKİNA VE KUMLAMA SAN. TİC. LTD. ŞTİ.

SUCCESSFULLY DELIVERED - 2012

SCOPE OF SUPPLY

- 20 Tons/Charge Capacity Natural Gas Heated Double Door Normalizing Furnace

Parameter	Value
Maximum Capacity	20 Tons/batch
MaterialSteel materials	High-chromium cast iron, austenitic manganese steels and other steels
Furnace Useful Dimensions	3.000 × 2.000 × 6.000 mm (W × H × L)
Furnace Bogie Loading Dimensions	3000 ×6000 (W x L)
Heating System	Direct Natural Gas
Total Heating Power	2700 kW
Max. Furnace Temperature	1100 °C
Furnace Operating Temperature	650 -1050 °C





KARTAL BOMBE SANAYİ -KOCAELİ

SUCCESSFULLY DELIVERED - 2013

SCOPE OF SUPPLY

- Electrically Heated Bogie Hearth Type Normalizing Furnace Revision





AKADEMİ METALURJİ SAN. TİC. LTD. ŞTİ.-KOCAELİ

SUCCESSFULLY DELIVERED - 2013

SCOPE OF SUPPLY

- 1.000 KG/BATCH CAPACITY, CONTROLLED GAS ATMOSPHERE, FORCED-COOLED, ELECTRICALLY HEATED TEMPERING FURNACE

Parameter	Value
Maximum Capacity	1.000 kg
Furnace Cross-Section	Circular
Furnace Useful Dimensions	600 × 750 × 1,000 mm (W × H × L)
Furnace External Dimensions	1.890 × 2.545 × 2.630 mm (W × H × L)
Heating System	Electrically heated
Heating Power	87 kW
Maximum Temperature	550 °C
Operating Temperature	200–550 °C



AKADEMİ METALURJİ SAN. TİC. LTD. ŞTİ.-KOCAELİ

SUCCESSFULLY DELIVERED - 2013

SCOPE OF SUPPLY

- 1.000 KG/BATCH CAPACITY, ELECTRICALLY HEATED TEMPERING FURNACE

Parameter	Value
Maximum Capacity	1.000 kg
Furnace Useful Dimensions	600 × 750 × 1.000 mm (W×H×L)
Approximate Furnace External Dimensions	1.342 × 2.254 × 1.460 mm (W×H×L)
Heating System	Electrically heated
Heating Power	65 kW
Max. Furnace Temperature	300°C
Furnace Operating Temperature Range	100–300°C



GEDİK DÖKÜM VE VANA SANAYİ VE TİC. A.Ş.-İSTANBUL

SUCCESSFULLY DELIVERED - 2013

SCOPE OF SUPPLY

- Double Door Front Loading Sintering Furnace

Parameter	Value
Material	Ceramic mould
Furnace Useful Dimensions	1.750× 1.000 × 1.500 mm (W × H × L)
Furnace External Dimensions	2.560 × 2.205 × 2.253 mm (W × H × L)
Approx. Overall Installation Dimensions	3.303 x 3.444 x 3.533 (W × H × L)
Heating System	Electrically heated
Total Heating Power	180 kW
Max. Furnace Temperature	1.250 °C
Furnace Operating Temperature	1.200 °C





LMA FOUNDRY STEEL WORKS TECHNOLOGY CENTER-ISTANBUL

SUCCESSFULLY DELIVERED - 2014

SCOPE OF SUPPLY

- 3.000 Kg/Hour Capacity Core Drying Furnace

Parameter	Value
Maximum Capacity	3,000 kg/h
Loading Basket Dimensions	1,250 × 1,600 × 1,250 mm (W × H × L)
Useful Dimensions	1,500 × 2,500 mm (W × H)
Maximum Temperature	250 °C
Temperature Uniformity	±10 °C
Conveyor Type	Wire Mesh Belt Conveyor
Conveyor Speed	1.5 m/min

PARSAN A.S.-ISTANBUL

SUCCESSFULLY DELIVERED - 2015

SCOPE OF SUPPLY

- 5 Units of Bogie Hearth Type Natural Gas Heated Die Heating Furnaces

Parameter	Value
Maximum Capacity	12,000 kg/charge
Mold Dimensions	2,000 × 1,700 × 2,400 mm (W × H × L)
Furnace Useful Dimensions	2,500 × 1,950 × 3,037 mm (W × H × L)
Furnace External Dimensions	3,926 × 4,340 × 3,831 mm (W × H × L)
Furnace Layout Dimensions	4,795 × 5,792 × 7,376 mm (W × H × L)
Heating System	Direct Natural Gas
Total Heating Power	650 kW
Maximum Temperature	500 °C
Operating Temperature Range	300–350 °C
Heating Rate at Maximum Load	150 °C/h





ÇORLU AĞIR MAKİNA SANAYİ A.Ş. - TEKİRDAĞ

SUCCESSFULLY DELIVERED - 2017

SCOPE OF SUPPLY

- 150 Tons/Charge Capacity Natural Gas Heated Stress Relieving Furnace

Parameter	Value
Maximum Capacity	150 tons/charge
Furnace Useful Dimensions	6,400 × 6,210 × 20,090 mm (W × H × L)
Furnace External Dimensions	7,851 × 8,160 × 21,300 mm (W × H × L)
Furnace Layout Dimensions	8,710 × 13,500 × 42,315 mm (W × H × L)
Approx. Furnace Layout Dimensions	4,020 × 4,876 × 6,600 mm (W × H × L)
Heating System	Direct Natural Gas
Total Heating Power	4.600 kW
Max. Operating Temperature	900 °C
Normal Operating Temperature	550-900 °C





GÜRSETAS DÖKÜM-KOCAELI

SUCCESSFULLY DELIVERED - 2017

SCOPE OF SUPPLY

- 5 Tons/Charge Capacity Electrically Heated Tempering Furnace

Parameter	Value
Maximum Capacity	5 tons/charge
Furnace Useful Dimensions	2,000 × 1,250 × 2,250 mm (W × H × L)
Car Loading Dimensions	2,175 × 2,700 mm (W × L)
Approx. Furnace External Dimensions	3,820 × 3,010 × 3,610 mm (W × H × L)
Approx. Furnace Layout Dimensions	4,020 × 4,876 × 6,600 mm (W × H × L)
Heating System	Electrically heated
Total Heating Power	200 kW
Furnace Operating Temperature	200–750 °C
Maximum Furnace Temperature	750 °C





EL METAL PLUS-AZERBAIJAN

SUCCESSFULLY DELIVERED - 2018

SCOPE OF SUPPLY

- 35 Tons/Hour Capacity Pusher Type Steel Billet Reheating Furnace

Parameter	Value
Furnace Capacity	35 tons/hour – 600 tons/day – 180,000 tons/year
Billet Dimensions	120 × 120 × 4,000 mm
Useful Dimensions	4,000 × 24,000 mm (W × L)
Approx. Furnace External Dimensions	5,710 × 3,500 × 27,525 mm (W × H × L)
Approx. Furnace Layout Dimensions	16,170 × 4,840 × 28,750 mm (W × H × L)
Heating System	Direct Natural Gas
Total Heating Power	18.000 kW
Maximum Temperature	1,300 °C
Operating Temperature	1,250 °C



