ALPHA & OMEGA SEMICONDUCTOR

AON7403

30V P-Channel MOSFET

General Description

The AON7403 uses advanced trench technology to provide excellent $R_{DS(ON)}$, and ultra-low low gate charge with a 25V gate rating. This device is suitable for use as a load switch or in PWM applications.

Product Summary

V_{DS}	-30V
I_D (at V_{GS}=-10V)	-29A
$R_{DS(ON)}$ (at V_{GS}=-10V)	< 18mΩ
$R_{DS(ON)}$ (at V_{GS}=-5V)	< 36mΩ

100% UIS Tested

Green Product

DFN 3x3_EP

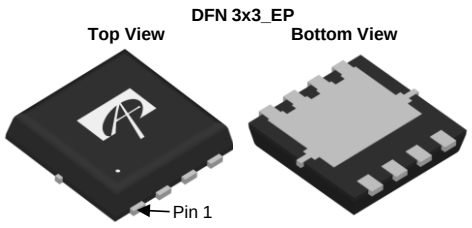





Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	-30	V
Gate-Source Voltage		V_{GS}	±25	V
Continuous Drain Current	T_C=25°C	I_D	-29	A
	T_C=100°C		-18	
Pulsed Drain Current [C]		I_{DM}	-80	
Continuous Drain Current	T_A=25°C	I_{DSM}	-11	A
	T_A=70°C		-8.5	
Avalanche Current [C]		I_{AR}	24	A
Repetitive avalanche energy L=0.1mH [C]		E_{AR}	29	mJ
Power Dissipation [B]	T_C=25°C	P_D	25	W
	T_C=100°C		10	
Power Dissipation [A]	T_A=25°C	P_{DSM}	4.1	W
	T_A=70°C		2.6	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150	°C

Thermal Characteristics

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	22	30	°C/W
Maximum Junction-to-Ambient [A D]	Steady-State		47	60	°C/W
Maximum Junction-to-Lead	Steady-State	$R_{\theta JC}$	4.2	5	°C/W

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=-250µA, V_{GS}=0V	-30			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=-30V, V_{GS}=0V			-1	µA
		T_J=55°C			-5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}= ±25V			100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=-250µA	-1.7	-2.2	-3	V
$I_{D(ON)}$	On state drain current	V_{GS}=-10V, V_{DS}=-5V	-80			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=-10V, I_D=-8A		14	18	mΩ
		T_J=125°C		20	25	
		V_{GS}=-5V, I_D=-5A		26	36	mΩ
g_{FS}	Forward Transconductance	V_{DS}=-5V, I_D=-8A		20		S
V_{SD}	Diode Forward Voltage	I_S=-1A,V_{GS}=0V		-0.7	-1	V
I_S	Maximum Body-Diode Continuous Current				-22	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=-15V, f=1MHz		1130	1400	pF
C_{oss}	Output Capacitance			240		pF
C_{rss}	Reverse Transfer Capacitance			155		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz		5.8	8	Ω
SWITCHING PARAMETERS						
Q_g(10V)	Total Gate Charge	V_{GS}=-10V, V_{DS}=-15V, I_D=-8A		18	24	nC
Q_{gs}	Gate Source Charge			5.5		nC
Q_{gd}	Gate Drain Charge			3.3		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=-10V, V_{DS}=-15V, R_L=1.8Ω, R_{GEN}=3Ω		8.7		ns
t_r	Turn-On Rise Time			8.5		ns
$t_{D(off)}$	Turn-Off DelayTime			18		ns
t_f	Turn-Off Fall Time			7		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=-8A, dI/dt=500A/µs		12	16	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=-8A, dI/dt=500A/µs		26		nC

A. The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A =25° C. The Power dissipation P_{DSM} is based on $R_{\theta JA}$ t ≤ 10s value and the maximum allowed junction temperature of 150° C. The value in any given application depends on the user's specific board design, and the maximum temperature of 150° C may be used if the PCB allows it.
B. The power dissipation P_D is based on $T_{J(MAX)}$=150° C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.
C. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=150° C. Ratings are based on low frequency and duty cycles to keep initial T_J =25° C.
D. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to case $R_{\theta JC}$ and case to ambient.
E. The static characteristics in Figures 1 to 6 are obtained using <300µs pulses, duty cycle 0.5% max.
F. These curves are based on the junction-to-case thermal impedence which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(MAX)}$=150° C. The SOA curve provides a single pulse rating.
G. The maximum current rating is package limited.
H. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with T_A=25° C.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

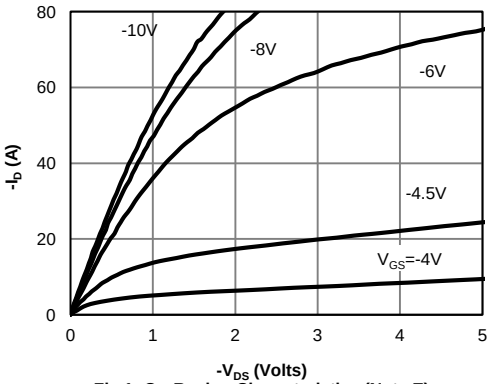

Fig 1: On-Region Characteristics (Note E)

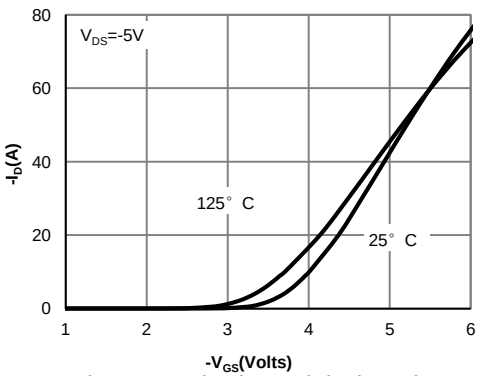

Figure 2: Transfer Characteristics (Note E)

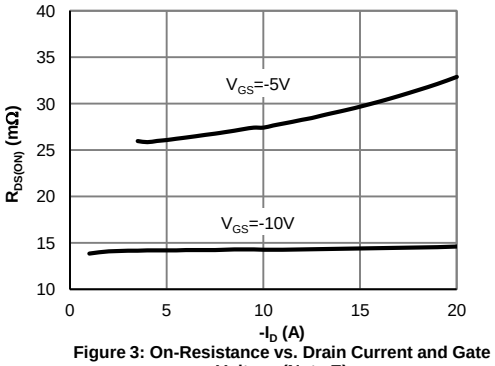

Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

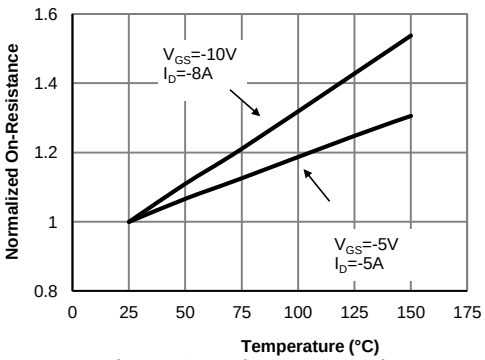

Figure 4: On-Resistance vs. Junction Temperature (Note E)

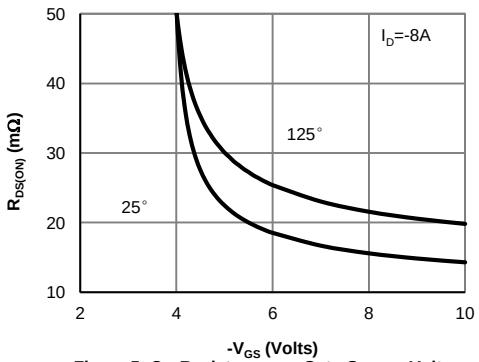

Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

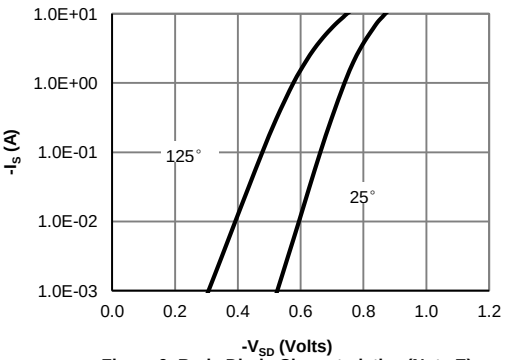

Figure 6: Body-Diode Characteristics (Note E)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

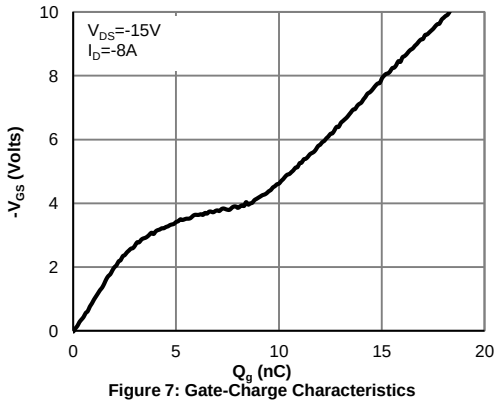

Figure 7: Gate-Charge Characteristics

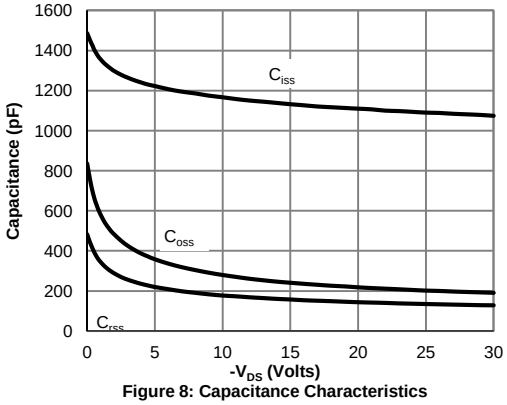

Figure 8: Capacitance Characteristics

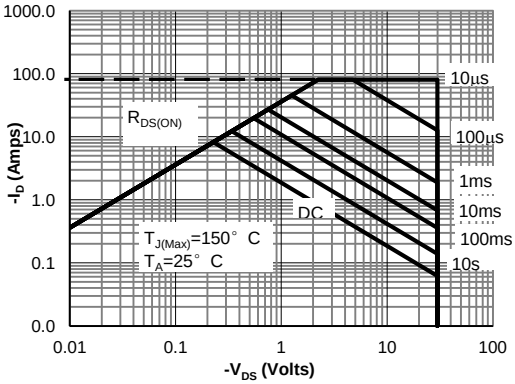

Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

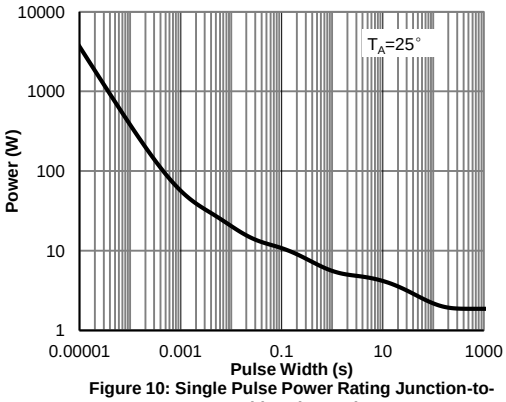

Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note F)

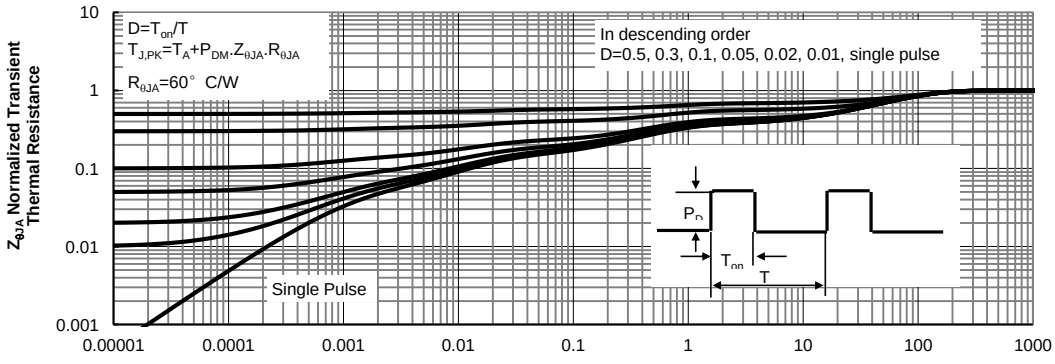

Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)

Gate Charge Test Circuit & Waveform

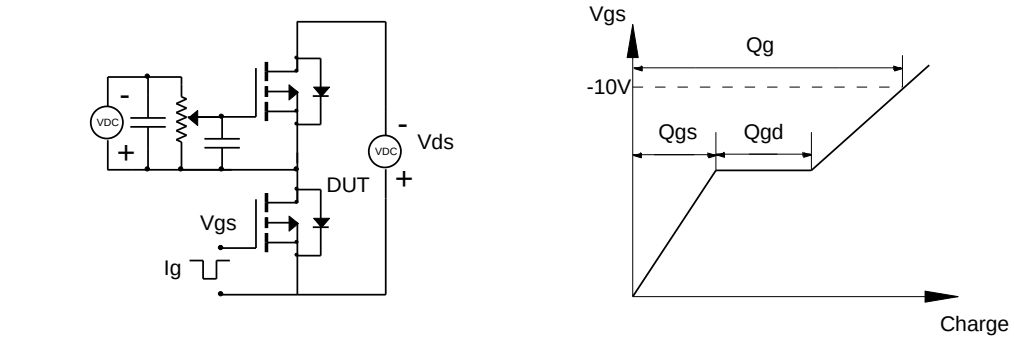

Resistive Switching Test Circuit & Waveforms

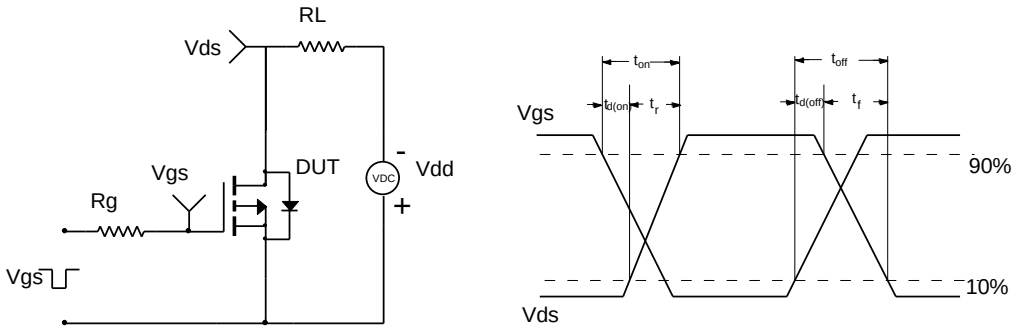

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

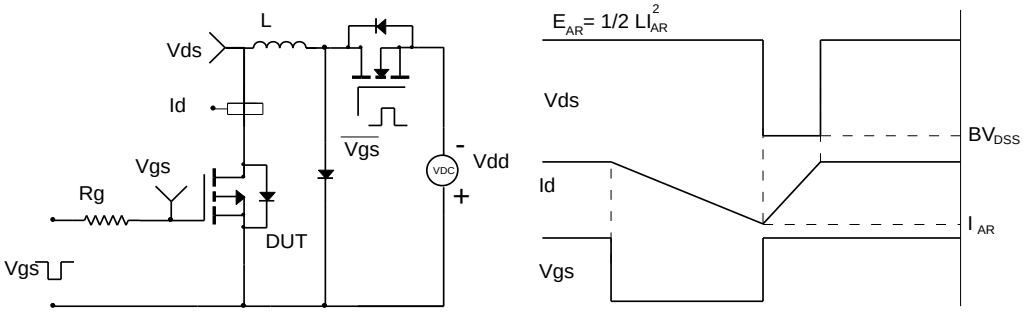

Diode Recovery Test Circuit & Waveforms