


1



2

3



4

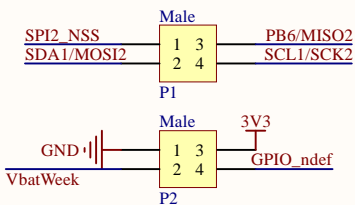


WS2812跳线取电
若2812不亮, 也会消耗0.4mA
左右电流

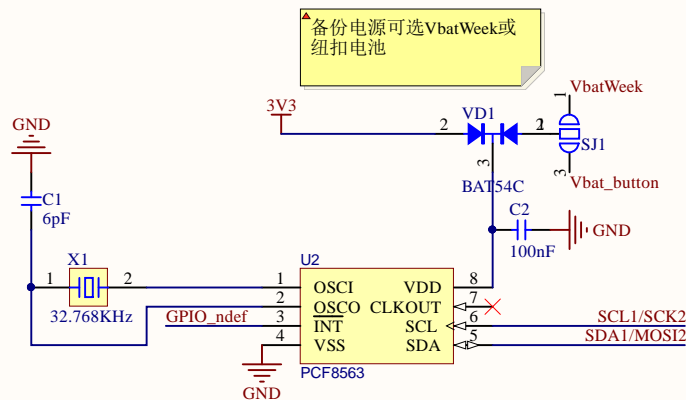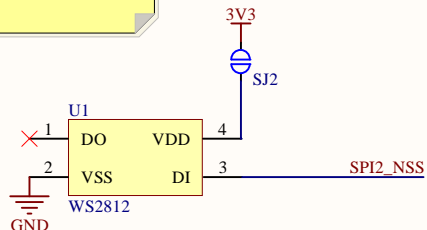


纽扣电池跳线充电

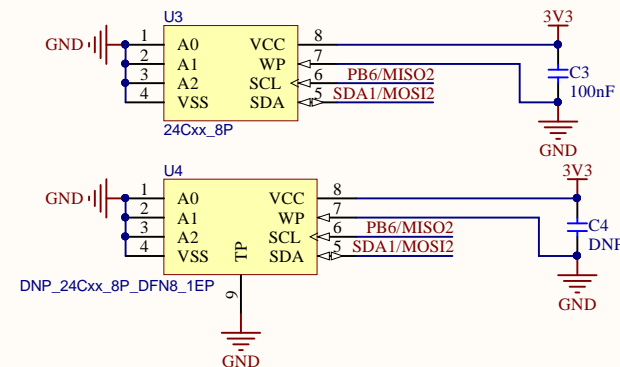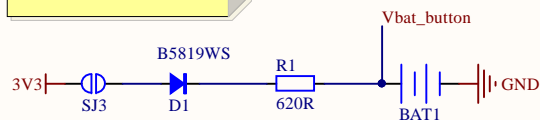

I2C EEPROM:
容量任意, 推荐24C512
可选SOIC-8封装或DFN8封装的
SOIC C3焊接100nF, C4不焊接
DFN8 C4焊接100nF, C3不焊接

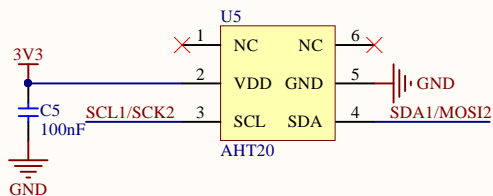

[ODG_LOGO]
[ODG_LOGO]

Title SAU-G0-EX_AHT-GL			Draw By: OldGerman	
Size: A4	Number:*	Revision: v1.0	https://github.com/oldgerman/SAU-G0	
Date: 2022/7/14	Time: 13:14:27	Sheet 1 of 1	SAU-G0	
File: D:\SAU-G0\Hardware\AD Project\SAU-G0-EX_AHT-GL\SAU-G0-EX_AHT-GL.SchDoc			OldGerman	

1

2

3

4