


MAX-A Navigation Module

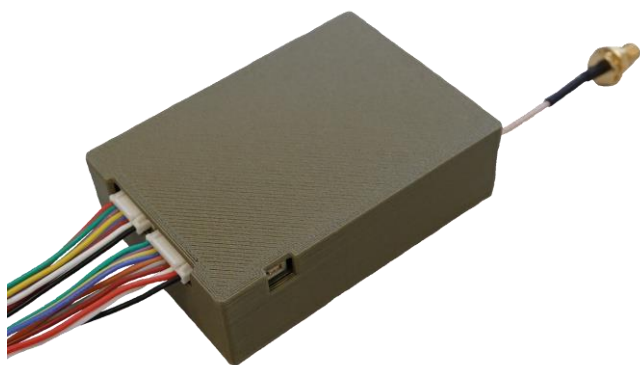

MAX-A, consisting of a navigation GNSS module and an external connection module, provides stable geolocation across various fields of application and stands out with enhanced capabilities for professional solutions.

Radio specifications

Operating bands:

- GPS: L1 C/A, L1C, L2C, L2 P(Y), L5
- GLONASS: L1 C/A, L2 C/A, L3, L2P
- BeiDou: B1I, B1C, B2a, B2b, B2I, B3I
- Galileo: E1, E5a, E5b, E6
- QZSS: L1 C/A, L1 C/B, L2C, L5
- NavIC: L5
- SBAS: EGNOS, WAAS, GAGAN, MSAS, SDCM

Number of processing channels: 544

Number of antenna inputs: 2

Maximum external antenna supply current:
150 mA

Power supply

Input supply voltage: 8 to 48 V

Antenna supply voltage: 3.3 to 5 V

Output supply voltage: 3.3 V, max. 500 mA

Maximum module power consumption: 1.6 W

Data transmission protocols

- Septentrio Binary Format (SBF)
- NMEA 0183 v2.3, v3.03, v4.0
- RINEX v2.x, v3.x
- RTCM v2.x, v3.x (including MSM)
- CMR v2.0 (output/input), CMR+ (input only)

Interfaces

- 4 UART, TTL 3V3
- USB Type-C

Additional outputs

EVENT 3V3, PPS 3V3

Bit rate


- Factory setting: 115,200 baud
- Configurable range: 1,200–4,000,000 baud

Physical and operational parameters

Operating temperature range: –40 °C to +85 °C

Storage temperature range: –55 °C to +85 °C

External connection module components

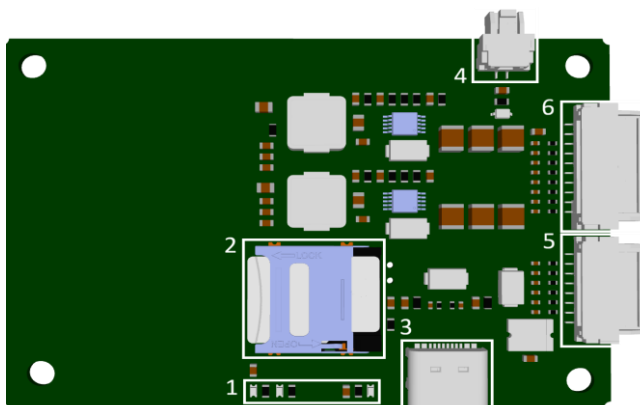

- 1—Indicator zone
- 2—microSD* slot
- 3—USB Type-C connector
- 4—JST connector, GH series, 1.25 mm pitch, 2 pins
- 5—JST connector, GH series, 1.25 mm pitch, 8 pins
- 6—JST connector, GH series, 1.25 mm pitch, 10 pins


* Supported microSD cards: 128 GB.




1. Indicator zone




2. microSD slot

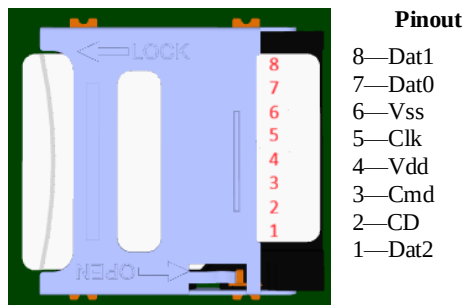


3. USB Type-C connector

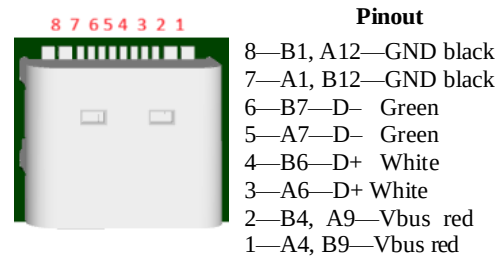


4. JST connector, GH series, 1.25 mm pitch, 2 pins



5. JST connector, GH series, 1.25 mm pitch, 8 pins

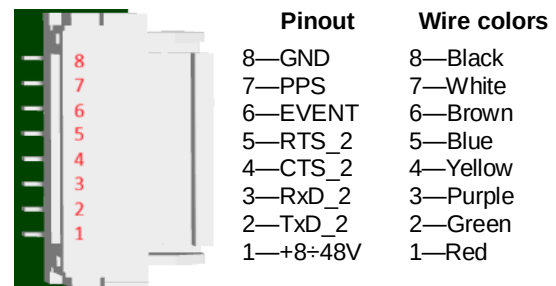

6. JST connector, GH series, 1.25 mm pitch, 10 pins

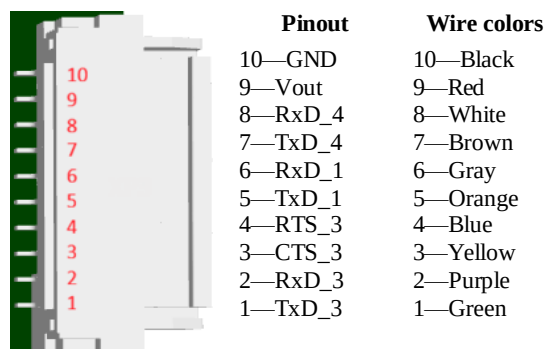




OLEMAX
SYSTEMS

OLEMAX SYSTEMS LLC (Company Registration No: 46180974)
35 Svitlytskoho St., Premises 108/4, Office 2 | Kyiv 04215, Ukraine
Phone: +38 (097) 266-51-57

GNSS module MMCX connectors

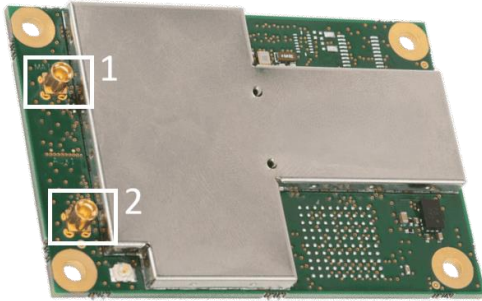

1—MAIN
2—AUX1