

Simultaneous Localization and Monitoring with Gaussian Processes

B. Sc. Oliver Neumann

Computer Science Student

Karlsruher Institut of Technology (KIT)

Dipl. Phys. Jana Mayer

Intelligent Sensor-Actor-Systems (ISAS)

Institute for Anthropomatics
and Robotics (IAR)

Dr. Ing. Benjamin Noack

Intelligent Sensor-Actor-Systems (ISAS)

Institute for Anthropomatics
and Robotics (IAR)

Abstract—Simultaneous localization and mapping (SLAM) became one of the most important research fields in the last two decades. There are also recent approaches facing SLAM with the use of physical phenomena. That is a promising step for many use cases, like indoor navigation. One challenging part of those approaches is to switch from discrete landmarks to continuous functions. This function often needs to be approximated for SLAM and also for monitoring usages. In this paper the basic knowledge of SLAM is explained and the mathematics behind gaussian processes is introduced. Moreover, recent approaches facing SLAM in combination of monitoring, using physical phenomena for SLAM in real time and modeling uncertainty in the input of gaussian processes, will be presented. At the end, open questions which could be faced in further proceeding are discussed.

I. INTRODUCTION

A. Motivation

Robots often have to move in an unknown environment. For that, a robot has to build up a map and locate itself in this environment. This kind of problem became a large research field in the last two decades under the name of *Simultaneous Localization and Mapping (SLAM)*. Most techniques use landmarks seen by a camera. The robot tries to see the landmarks in two successive images again and estimate its new position by the change of the landmarks. Figure 1 is showing landmarks on the floor prepared for the robot so it can use SLAM. But preparation isn't needed every time, higher-priced vacuum cleaning robots for example using SLAM with a camera looking at the ceiling.

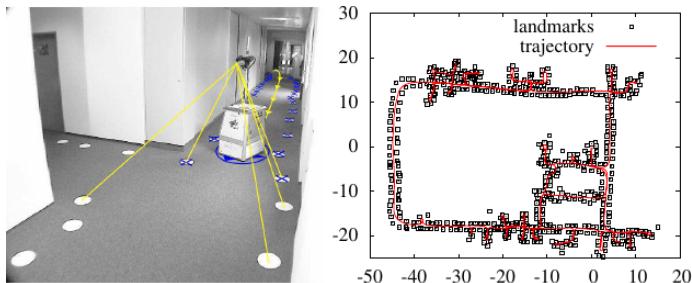


Fig. 1: An illustration for SLAM with prepared environment for the robot. Landmarks are mounted on the floor which the robot can recognize (left image). The generated map is shown on the right [1].

Recent researchers are trying to use physical phenomena instead of landmarks with promising results. For example wifi signal or the magnetic field. This opens a completely new variety of possible applications. Environments where landmarks of a camera are not suitable for SLAM applications like underwater. Also, scenarios where monitoring of a physical phenomenon is the aim and this phenomenon is also suitable for SLAM. So, there is no need for extra equipment mounted on the robot which saves money.

However, switching from landmarks to physical phenomena is not trivial. The main difference is that landmarks are discrete in space and physical phenomena are continuous and there can't be made any assumptions to the underlying function (e.g. it can be described by a polynomial). Moreover, a moving robot will see different landmarks multiple times and can set its position in relation to it. In case of physical phenomena, there are only measurements possible at the current position of the robot which is uncertain. But every measurements are correlating which can be used to estimate a position or trajectory of the robot. This correlation is modeled within the covariance matrix of a gaussian process which will be discussed in I-C.

B. State of the art SLAM

As mentioned before, SLAM describes the field of problem where an agent or robot has to locate itself in an unknown environment. Therefore the agent has to build up a map. The map normally containing discrete landmarks but also continuous functions or planes (as an approximation of the world) could be possible. All of the techniques have in common, that the created map is always an estimation. So SLAM is a probabilistic approach. The reason for that is, that all data given is uncertain. Such as current position, measured value (e.g. magnetic field) or landmark position. The noise of the measurements is normally gaussian distributed.

When thinking of SLAM there are two common classifications [1]. The first class models SLAM as an on-line state estimator, where the state is the current position of the robot within the map. This approach is called filtering or on-line SLAM. In contrast to that smoothing approaches attempt to estimate the full trajectory of the robot based on all measurements. Often smoothing is called full SLAM.

Regardless of filtering or smoothing approaches, they often use Kalman or particle filter to estimate the current state [1]. Kalman filter is a mathematical concept and is also known as linear quadratic estimation (LQE). It contains two major steps, prediction and update. In the prediction step the next state is predicted by using the currently given data. After that, the prediction will be improved by combining the estimated state from the prediction with the new measured state [2]. This step is called update. Kalman filter always follows only one hypothesis. In contrast to that particle filters were invented. Each particle follows a specific hypothesis and normally there are multiple particles. So, particle filter follows multiple hypothesis.

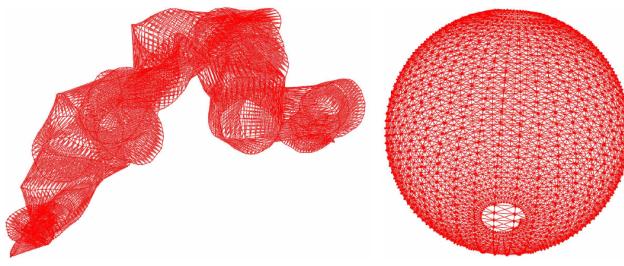


Fig. 2: Showcase of a current state-of-the-art graph-based SLAM approach. Initial position estimation on the left and next to it graph-based SLAM position estimation. The robot was moved in a simulation on the surface of a sphere [1].

Current state-of-the-art techniques of SLAM using graph-based approaches. A performance showcase of that is shown in figure 2. The idea of those approaches is easy to understand. While the robot is moving and making measurements a graph is built up as illustrated in figure 3. With graph algorithms the positions x_0, \dots, x_n can now be estimated.

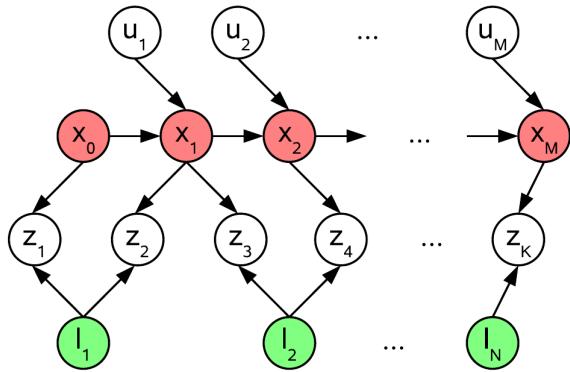


Fig. 3: SLAM graph with x_i as the robot position at time step i . l_j is the j^{th} landmark. z_k is the k^{th} by the robot measured landmark. u_i is the control input at time step i which is for example odometry data [3]. For understanding:

At time step 1 the robot position was x_1 and it measured landmark l_1 and l_2 which can be seen by the measurements z_2 and z_3 . The input from the control unit was u_1 .

C. Gaussian Process

In case of SLAM with physical phenomena the approximation of the underlying function is done with gaussian processes. A gaussian process is a stochastic process, so it consists of a set of random variables which are indexed by time or space. Random variables of a gaussian process are especially multivariate normal distributed. So every finite subset of a gaussian process is again multivariate normal distributed.

Gaussian processes are defined by a mean function $m(t)$ and a covariance function $k(x_i, x_j)$ also called kernel. If $m(t) = 0$ the gaussian process is called centered. For the kernel radial basis function can be used. Such gaussian processes are called radial. For a radial covariance function follows $k(x_i, x_j) = k(\|x_i - x_j\|)$. One very common radial kernel is the squared exponential kernel [4]:

$$k(x_i, x_j) = \sigma^2 \exp\left(-\frac{(x_i - x_j)^2}{2l^2}\right)$$

It is also possible to model noisy measurements with gaussian processes. Assume the noise is normal distributed with variance σ^2 . Then measurements can be described like $y_i = f(x_i) + \mathcal{N}(0, \sigma^2)$. Combining the covariance function with the model of noisy measurements, that will lead to the slightly changed kernel:

$$k(x_i, x_j) = \sigma^2 \exp\left(-\frac{(x_i - x_j)^2}{2l^2}\right) + \delta_{ij} \sigma^2_{noise}$$

In this kernel δ_{ij} is the Kronecker delta. This function is only 1 when $i = j$ otherwise it is 0. So, σ^2 is only added to the measurements. Figure 4 gives an example for gaussian processes with and without noisy measurements.

Assume now there are n measurements y_1, \dots, y_n taken at x_1, \dots, x_n . Then the covariance matrix would be:

$$K = \begin{bmatrix} k(x_1, x_1) & k(x_1, x_2) & \dots & k(x_1, x_n) \\ k(x_2, x_1) & k(x_2, x_2) & \dots & k(x_2, x_n) \\ \vdots & \vdots & \ddots & \vdots \\ k(x_n, x_1) & k(x_n, x_2) & \dots & k(x_n, x_n) \end{bmatrix}$$

Estimating y^* at x^* and assuming the kernel is radial, would lead to a covariance matrix:

$$\begin{bmatrix} K & K^T \\ K_* & K_{**} \end{bmatrix} \text{ with } \\ K_* = [k(x_*, x_1), \dots, k(x_*, x_n)], \\ K_{**} = k(x_*, x_*)$$

Because of gaussian processes modelling data from a multivariate normal distribution, y and y_* can be modeled as:

$$\begin{bmatrix} y \\ y_* \end{bmatrix} \sim \mathcal{N}\left(0, \begin{bmatrix} K & K^T \\ K_* & K_{**} \end{bmatrix}\right)$$

Using the mathematics of multivariate gaussian distributions, the most likely value of y_* can be calculated by:

$$y_*|y \sim \mathcal{N}(K_* K^{-1} y, K_{**} - K_* K^{-1} K_*^T)$$

$$\Rightarrow \bar{y}_* = K_* K^{-1} y$$

The derivation of the formula is well explained by Ebden in 2008 [4]. Notice that also the variance for y_* is given by:

$$var(y_*) = K_{**} - K_* K^{-1} K_*^T$$

All that, uncertainty in measurements, prediction of y_* and probability of the prediction can be seen in figure 4. Note that for linear increasing measurements the size of the covariance matrix rises quadratically and for y_* the inverse of that matrix has to be calculated. So it is quite slow for large scale data. Some approaches facing that will be described in the next chapter. Another remark is that the standard gaussian process is not possible to model uncertainty in the input data. A recent approach for that will also be presented in the chapter II-D.

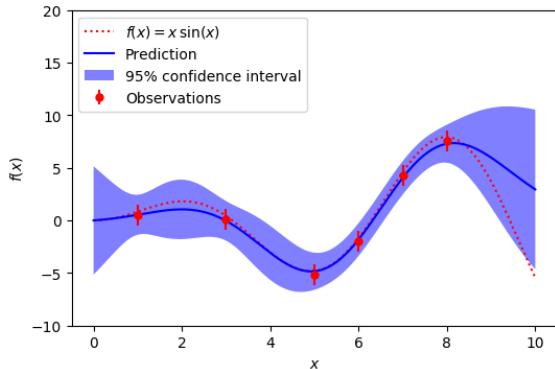
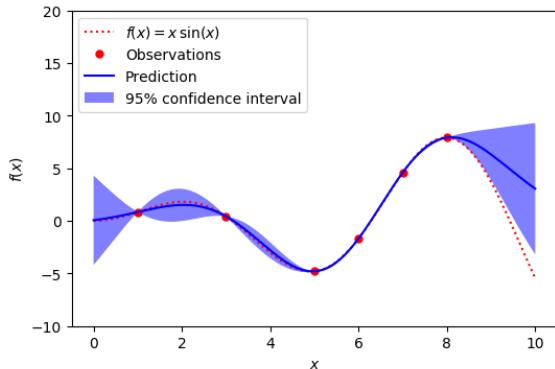


Fig. 4: Plot of two gaussian processes regressions with the same measurement points x_i but the one at the bottom has noisy measurements with variance $\sigma_{noise}^2 = 1$. Also noticeable the probability of the predictions represented through the confidence interval.

II. CURRENT WORK

This chapter will present some recent scientific work. Aim is to give an overview of the current work done in context of SLAM with monitoring, SLAM with physical phenomena and gaussian processes.

A. Monitoring with Complete Coverage

Wieser and his team of researches faced the problem of monitoring an indoor magnetic field with high spatial resolution [5]. They don't use the magnetic field for SLAM instead they use a camera mounted on top of the mobile robot. For the configuration space a grid based representation is used. On this configuration space graph search algorithms, like Best-First-Search and Dijkstra, where applied to find the best way through the environment with complete coverage [5]. Figure 5 shows the final result. Wieser et al. do not use any kind of regression to approximate the magnetic field.

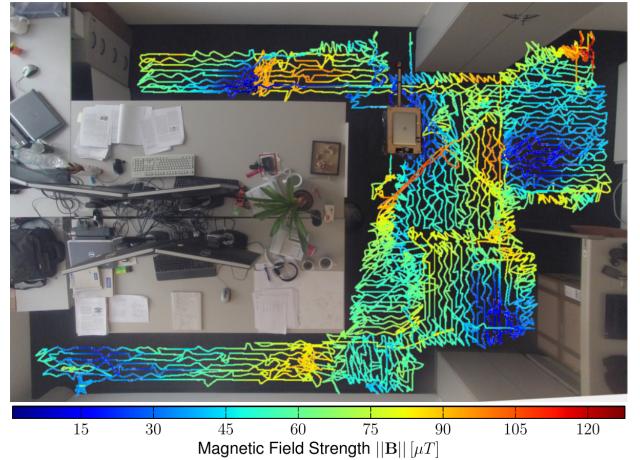


Fig. 5: Final result of Wieser et al. [5]. It shows the complete coverage trajectory with measurements of the magnetic field. The robot went through the office and the measurements have a spatial resolution of 0.05m [5].

Their program consists of four different threads. One thread processes the images by the camera for localization and mapping and writes its result into a workspace. A thread called configuration space mapper, processes data from the workspace and gathering data from the magnetic field sensor. The result of that process is written into a configuration space. A path planning thread uses this information to plan an optimal way. The last thread is called robot controller and has to perform the path given by the path planner while controlling the actuators of the robot. An illustration of that system can be seen in figure 6.

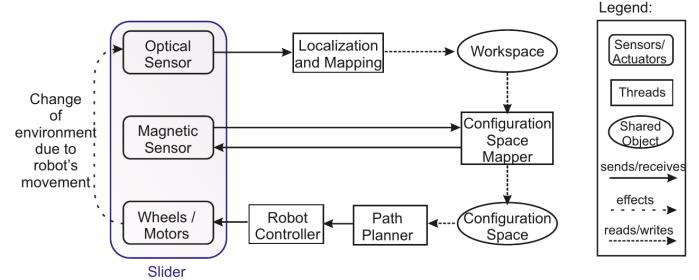


Fig. 6: System diagram shows the basic functionality of the approach by Wieser et al. [5].

B. Scalable Magnetic Field SLAM

Manon Kok and Arno Solin present in their paper an approach for scalable on-line SLAM in 3D using magnetic field and gaussian processes [6]. An example is shown in figure 7. In their work they had to face some problems which are already mentioned before. Approximate the underlying function of the magnetic field with gaussian processes. Handle large scale data because of on-line requirements. Using physical phenomena instead of images for SLAM approaches.

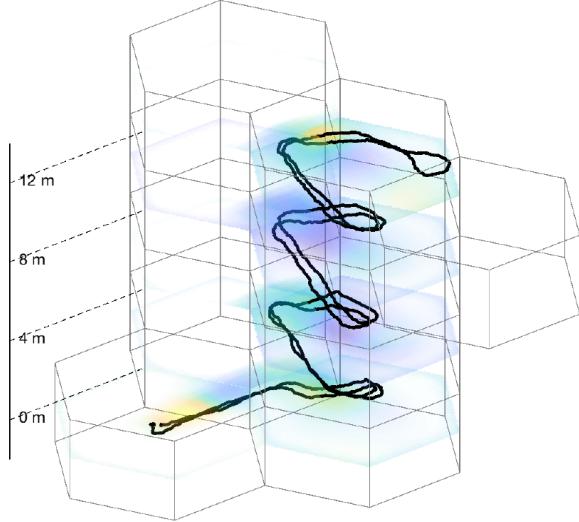


Fig. 7: Example by Manon Kon and Arno Solin showing 3D SLAM using magnetic field. The dataset was recorded at the University of Cambridge at the stairs of the Engineering Department [6].

To approximate the magnetic field, they use a combination of two kernels, the linear and squared exponential kernel and a mean centered around zero [6]. That leads to the following gaussian process.

$$GP(0, k_{lin}(x_i, x_j) + k_{se}(x_i, x_j)) \text{ with}$$

$$k_{lin}(x_i, x_j) = \sigma_{lin}^2 x_i^T x_j,$$

$$k_{se} = \sigma_{se}^2 \exp\left(-\frac{\|x_i - x_j\|^2}{2l^2}\right)$$

To face the problem of on-line requirements, they divided the 3D space into hexagonal blocks (See Figure 7 and 8). For each block there is a gaussian process for all data points within this block. This makes the covariance matrix for a block much smaller than one large one. Every time a measurement is taken at a position where no hexagonal block exists, a new block will be created. Through that approach it is possible to do SLAM on the magnetic field in real time. A demonstration for that is given by them in a video they produced [6].

As mentioned in chapter I-B current state of the art approaches of SLAM using graph-based techniques. Kok and Solin don't use a graph-based approach. They choose a combination of Kalman and particle filtering. The Kalman filter is used for update measurements and the particle filter for

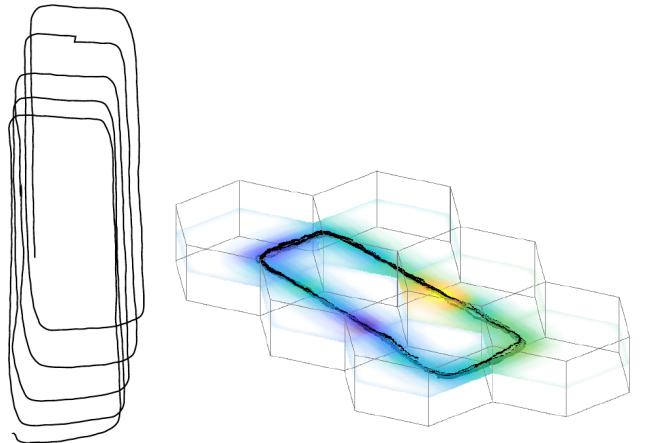


Fig. 8: Performance demonstration of the SLAM algorithm by Kok and Solin [6]. The trajectory on the left shows the odometrie data collected by a iPhone 6s and next to it the resulting trajectory with the approximated magnetic field.

predictions in time. For more information, a description of the algorithm can be found in their paper [6]. A performance demonstration is shown in figure 8.

C. Terrain Field SLAM

One interesting approach from Hyeyoung Yu and Beomhee Lee deals with terrain field SLAM [7]. They used the vibrations obtained from the robot, which are caused by the interaction between the terrain and the mobile robot, as the physical phenomenon for SLAM. Their experimental setup containing the robot and an area with different subsurfaces which can be seen in figure 9.



Fig. 9: Illustration of the setup by Yu and Lee. The mobile robot at the left and on the right the environment for the robot to move in. The environment containing five different subsurfaces [7].

Also, Yu and Lee used gaussian processes to infer the terrain field. Although, they don't face the problem of doing SLAM and gaussian process regression on-line. A performance example of their approach is shown in figure 10. There is a little derivation over time, but for the given terrain field the result is considerable [7].

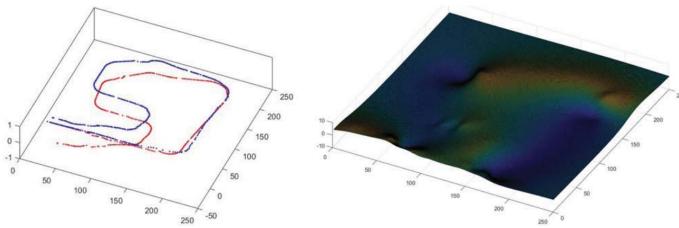


Fig. 10: Performance illustration of the terrain based SLAM approach by Yu and Lee [7]. Robot trajectory in red on the left and ground truth in blue. On the right inferred terrain field.

D. Uncertain Inputs with Gaussian Processes

As mentioned in chapter I-C uncertain inputs are not a part of standard gaussian processes [8]. So researchers have to face that problem. One team which did that is Andreas C. Damianou et al. First they modeled the uncertain input as:

$$z_i \sim \mathcal{N}(x_i, \sigma_{noise})$$

Which leads to a gaussian prior distribution over X :

$$p(X|Z) = \prod_{i=1}^{\infty} \mathcal{N}(x_i|z_i, \sigma_{noise})$$

That prior distribution they combining with the gaussian process latent variable model to handle uncertain inputs. As an example they propagating frames in videos. For that they choose a fix windows size and use the frames as input for forecasting new frames. Although, frames of the video don't have to be noisy the propagated frames are. This propagated frames are the input for the next time steps and because they were forecasted they are uncertain. With gaussian processes it is also possible to calculate the uncertainty and variance of the propagated frames which is useful for handling uncertain input. An example is shown in figure 11.

III. CONCLUSION

When facing the problem of SLAM using physical phenomena one challenge is to handle continuous functions in contrast to discrete landmarks. Moreover, the physical phenomena need to be approximated to use in case of SLAM. For that, gaussian processes are needed.

In chapter I-B a current state-of-the-art graph-based SLAM techniques is discussed. This approach is proven but it's only working in case of landmarks. It should be possible to formulate the problem of SLAM using physical phenomena in a graph-based manner. This could be faced in later proceedings.

A terrain field based SLAM approach was discussed in II-C. It showed that a variety of physical phenomena could be used for a SLAM approach. In further studies different phenomena could be observed and analyzed how suitable they are for SLAM approaches. E.g. texture of a subsurface measured by a camera, emission in a city or environmental sound.

Thinking of different suitable physical phenomena would also lead to the question how to handle phenomena which

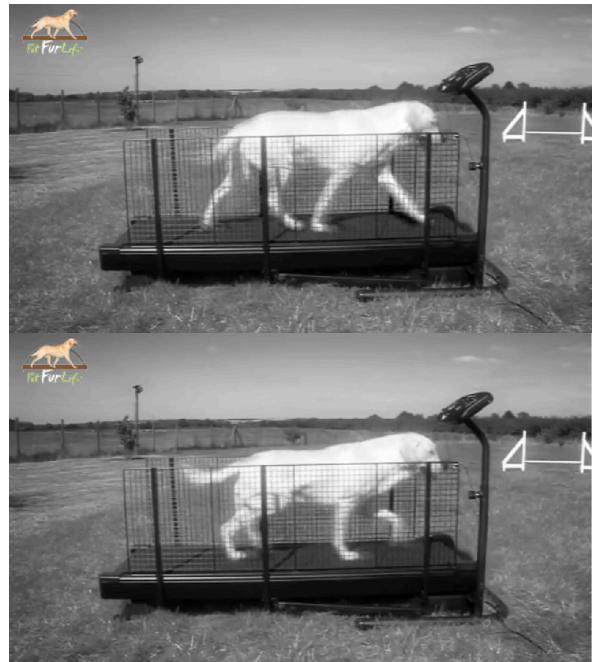


Fig. 11: Propagation demonstration of video frames. Top image shows an example frame of the input window for propagating the next frame (bottom).

change in time. Imagine autonomous submarine using sea streams for SLAM to monitor a gas pipeline. But sea streams won't be stable in time. How to still use sea streams for SLAM also would need more research to do.

Another interesting thought is using only gaussian processes with uncertain input for SLAM without any common SLAM techniques like Kalman filter or graph-based approaches. The idea would be that all measurements are taken at an uncertain position which is the input for the gaussian process. To use gaussian processes for that case, the uncertainty in the input has to decrease. Current researchers often only face the problem of getting more accurate in the output but not in the input data. Equally like the presented paper from Damianou et al. in chapter II-D.

As mentioned before, different phenomena could be used for SLAM. Also, it could be an aim to monitor that phenomena. But when it comes to combining monitoring and SLAM there has to be more work to do. In II-A a traditional SLAM approach with focus on monitoring was introduced, but how to deal with phenomena changing over time (so they need to be monitored)? The certainty in the measurements should decrease over time, because the measurements getting older. So, there are also questions to answer.

In conclusion, there are many different problems to solve. Thinking of combining SLAM with physical phenomena and the aim of monitoring these. Also, getting away from traditional SLAM approaches and only using gaussian processes with uncertain input or just consider new suitable physical phenomena for SLAM as mentioned before.

REFERENCES

- [1] G. Grisetti, R. Kummerle, C. Stachniss, and W. Burgard, “A tutorial on graph-based SLAM,” vol. 2, no. 4, pp. 31–43.
- [2] T. Basar, *A New Approach to Linear Filtering and Prediction Problems*. IEEE, 2001.
- [3] M. Kaess, A. Ranganathan, and F. Dellaert, “iSAM: Incremental smoothing and mapping,” vol. 24, no. 6, pp. 1365–1378.
- [4] M. Ebdon, “Gaussian processes for regression: A quick introduction,” p. 11, 2015.
- [5] I. Wieser, A. V. Ruiz, M. Frassl, M. Angermann, J. Mueller, and M. Lichtenstern, “Autonomous robotic slam-based indoor navigation for high resolution sampling with complete coverage,” in *2014 IEEE/ION Position, Location and Navigation Symposium - PLANS 2014*, pp. 945–951, May 2014.
- [6] M. Kok and A. Solin, “Scalable magnetic field SLAM in 3d using gaussian process maps.”
- [7] H. Yu and B. Lee, “Terrain field SLAM and uncertainty mapping using gaussian process,” p. 4, 2018.
- [8] A. C. Damianou, M. K. Titsias, and N. D. Lawrence, “Variational inference for uncertainty on the inputs of gaussian process models.”
- [9] D. Hanley, A. B. Faustino, S. D. Zelman, D. A. Degenhardt, and T. Bretl, “MagPIE: A dataset for indoor positioning with magnetic anomalies,” in *2017 International Conference on Indoor Positioning and Indoor Navigation (IPIN)*, pp. 1–8, IEEE.
- [10] M. F. Huber, “Recursive gaussian process: On-line regression and learning,” vol. 45, pp. 85–91.
- [11] M. F. Huber, “Recursive gaussian process regression,” in *2013 IEEE International Conference on Acoustics, Speech and Signal Processing*, pp. 3362–3366, IEEE.