


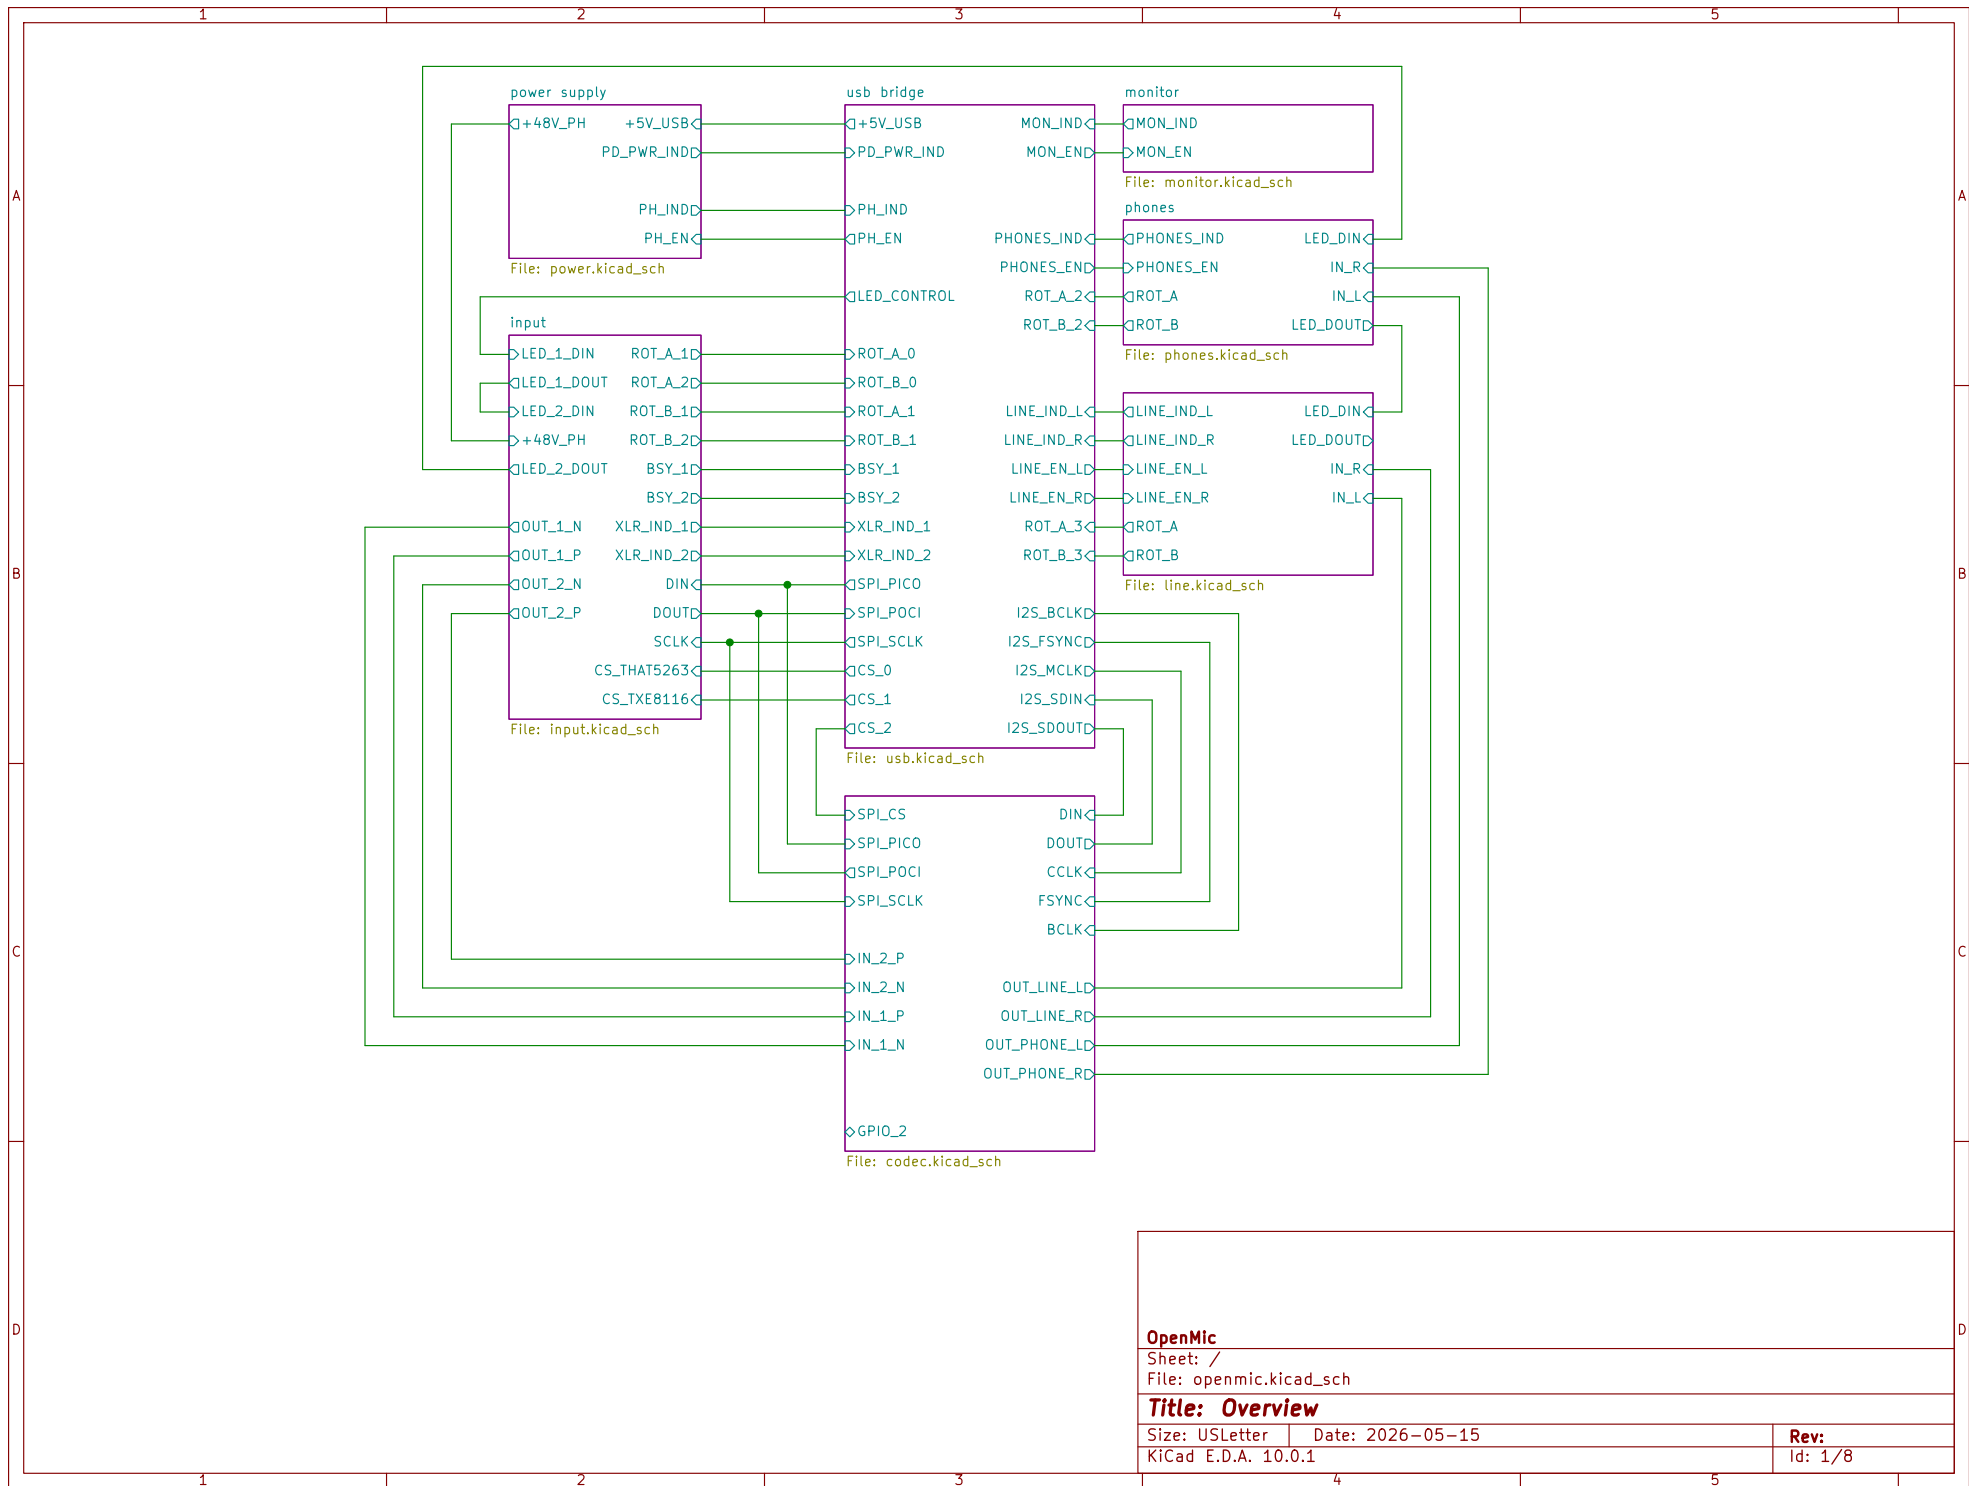


OpenMic


Sheet: /
File: openmic.kicad_sch

Title: Overview

Size: USLetter	Date: 2026-05-15
KICad E.D.A. 10.0.1	

Rev:
Id: 1/8

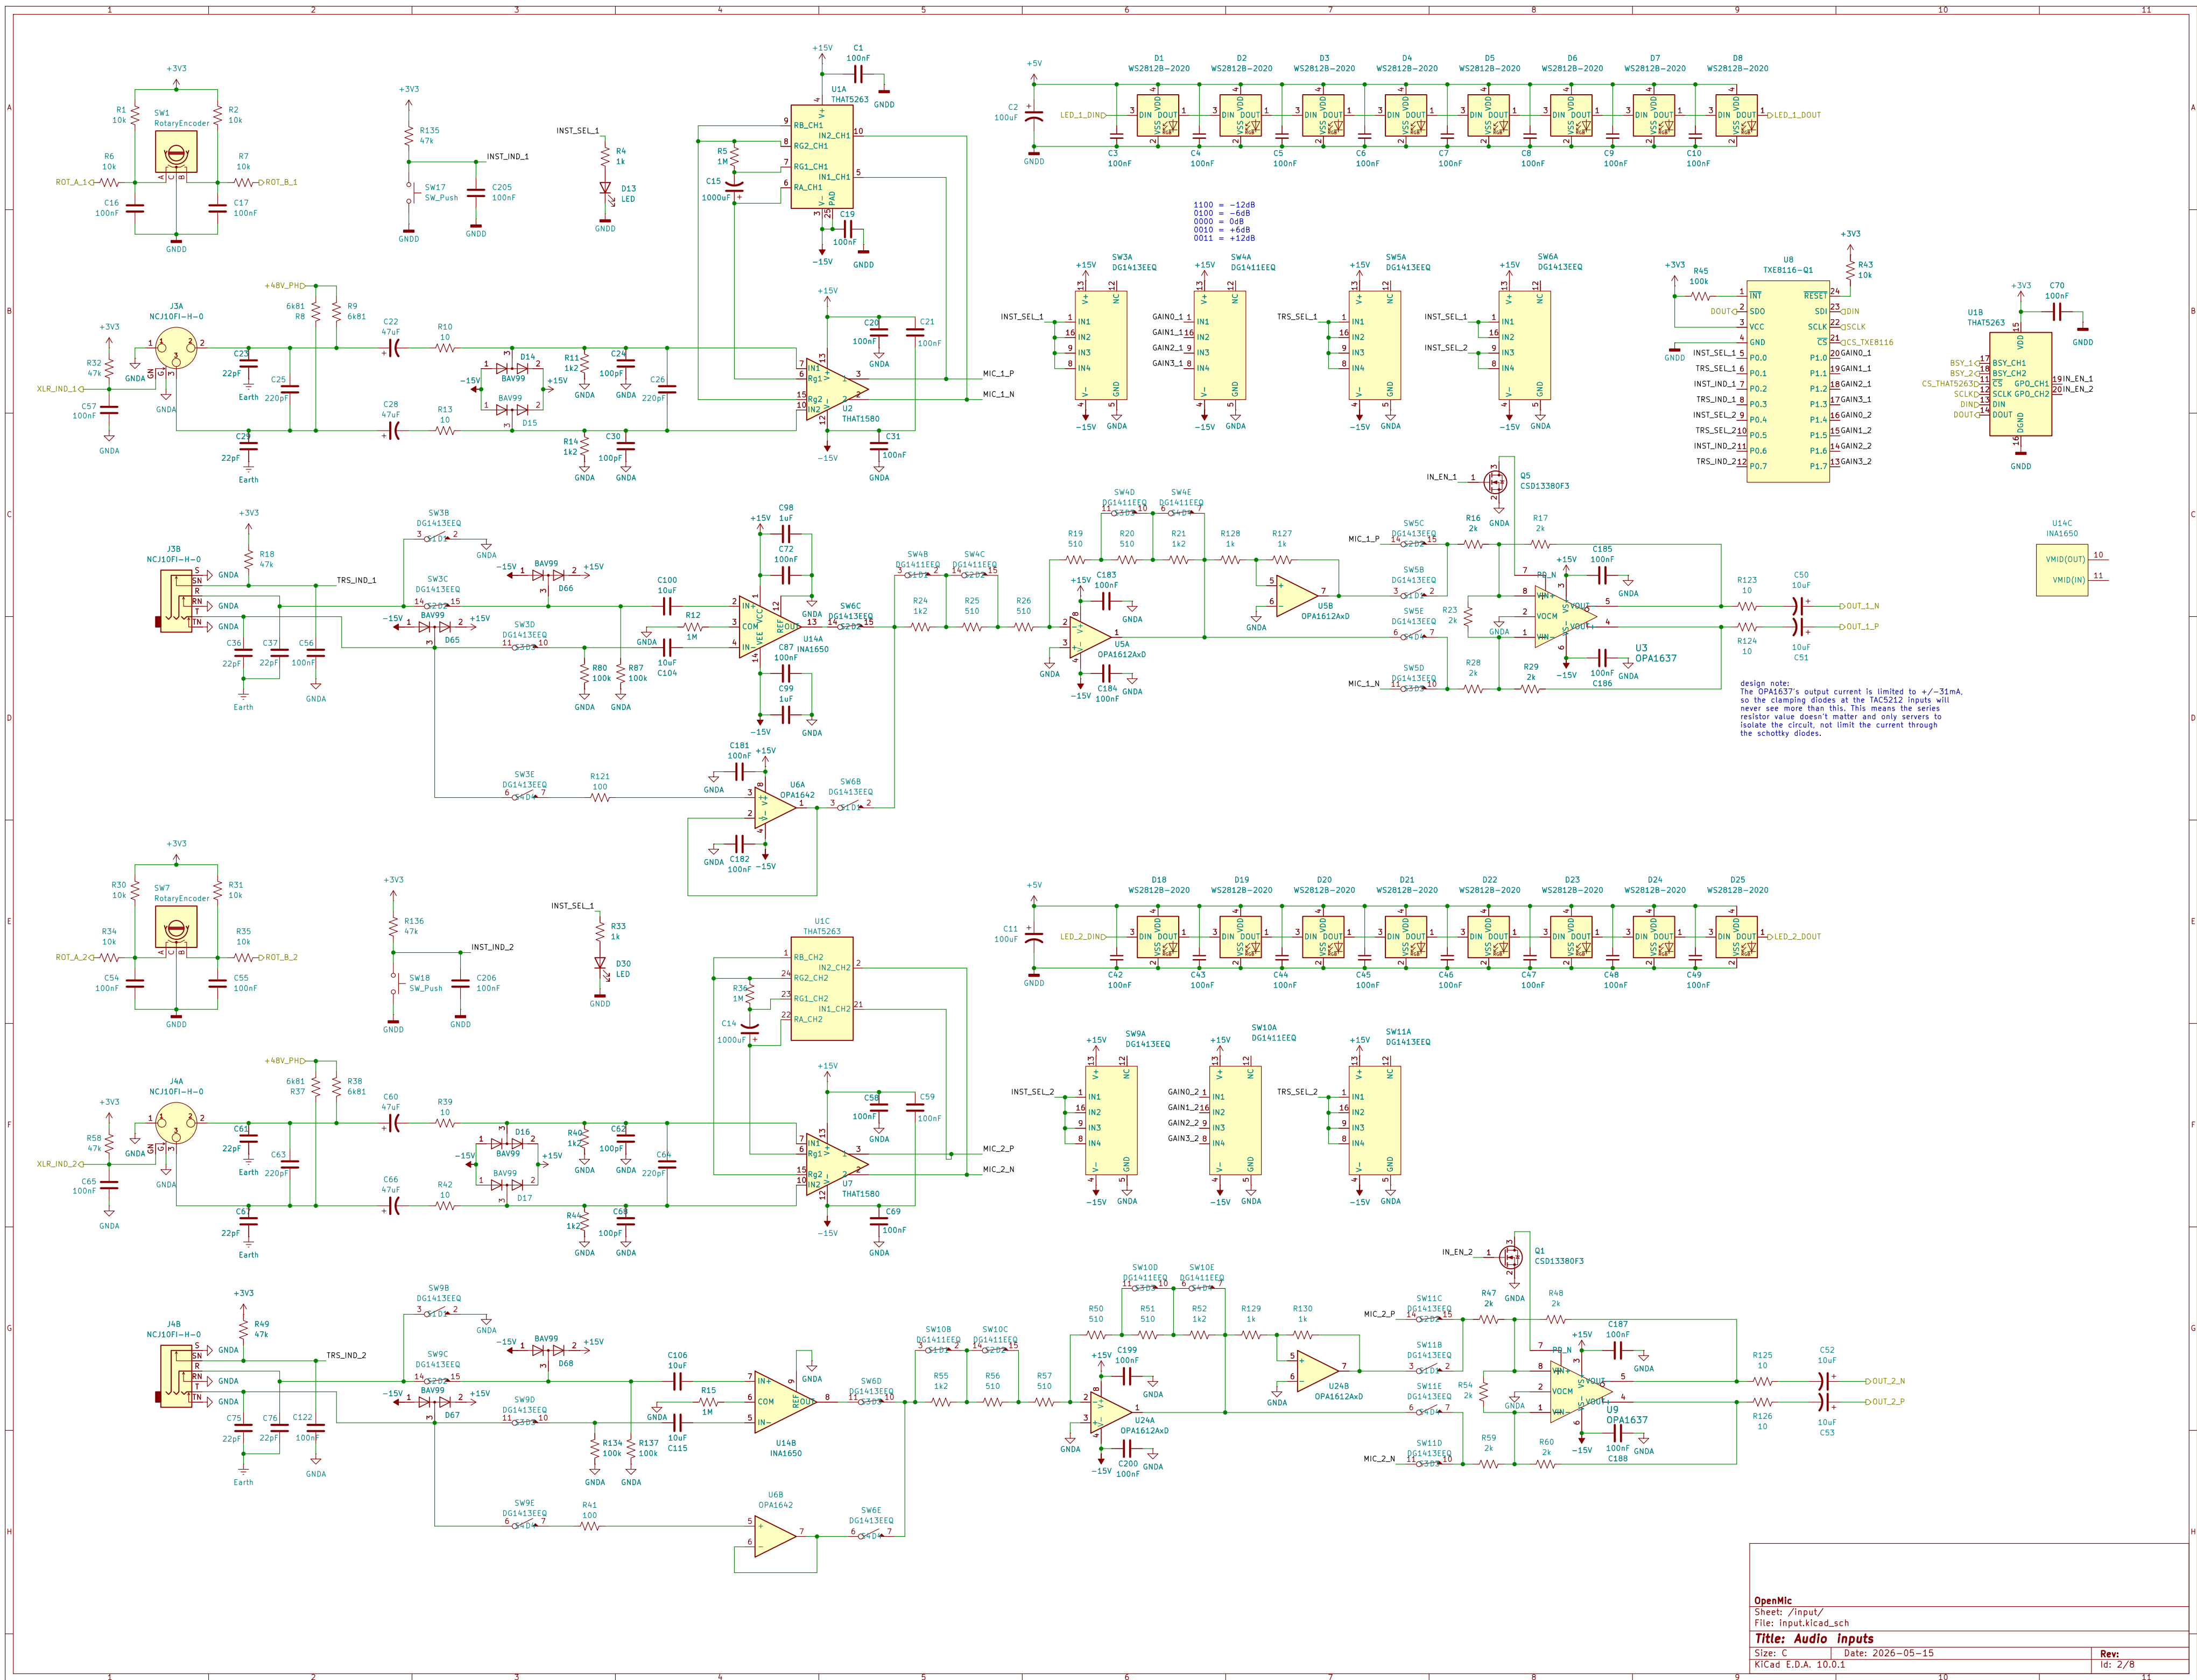

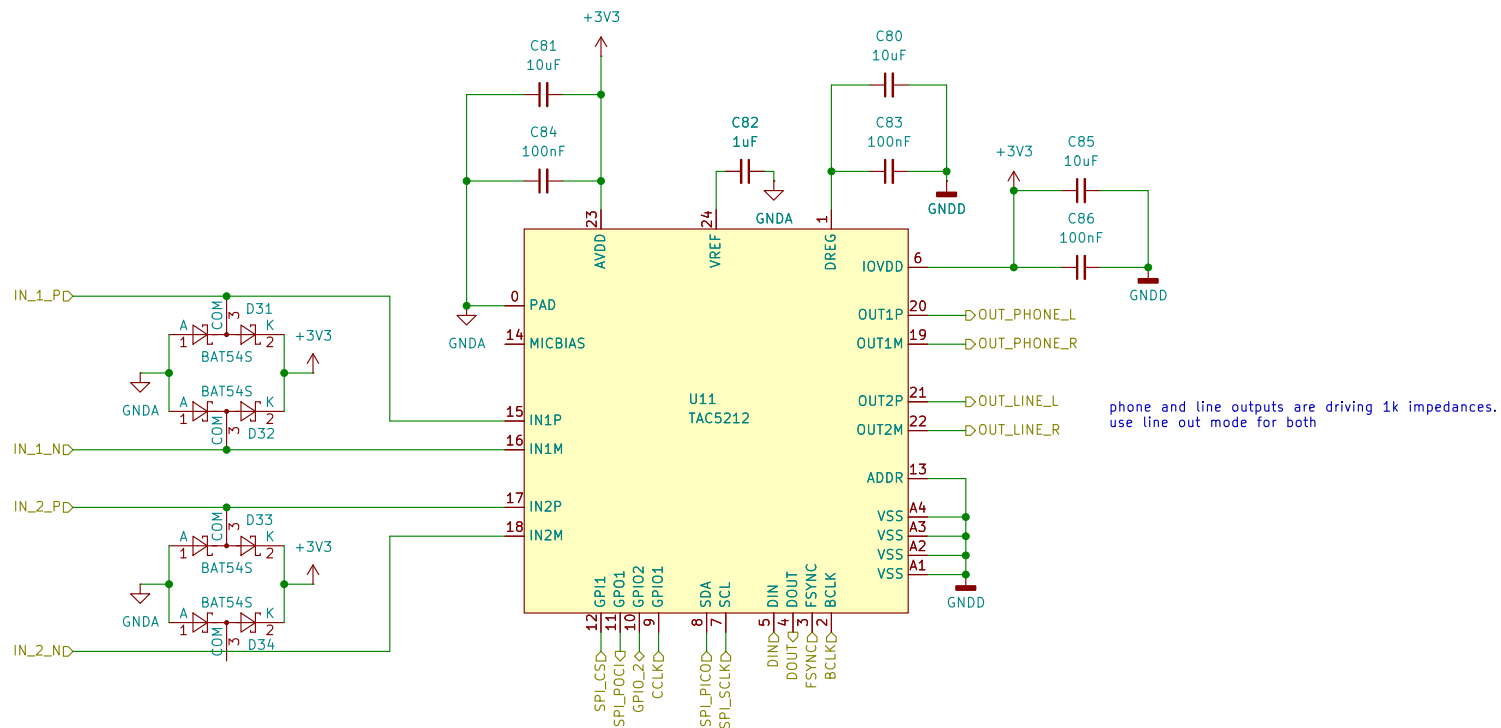

phone and line outputs are driving 1k impedances.
use line out mode for both

use 5k input impedance (default), AC coupled
set INCAP_QCHG = 3d (50ms) to match the 40ms charge time of the 10uF cap


OpenMic


Sheet: /codec/
File: codec.kicad_sch


Title: Audio codec

Size: USLetter Date: 2026-05-15
KiCad E.D.A. 10.0.1

Rev:
Id: 4/8

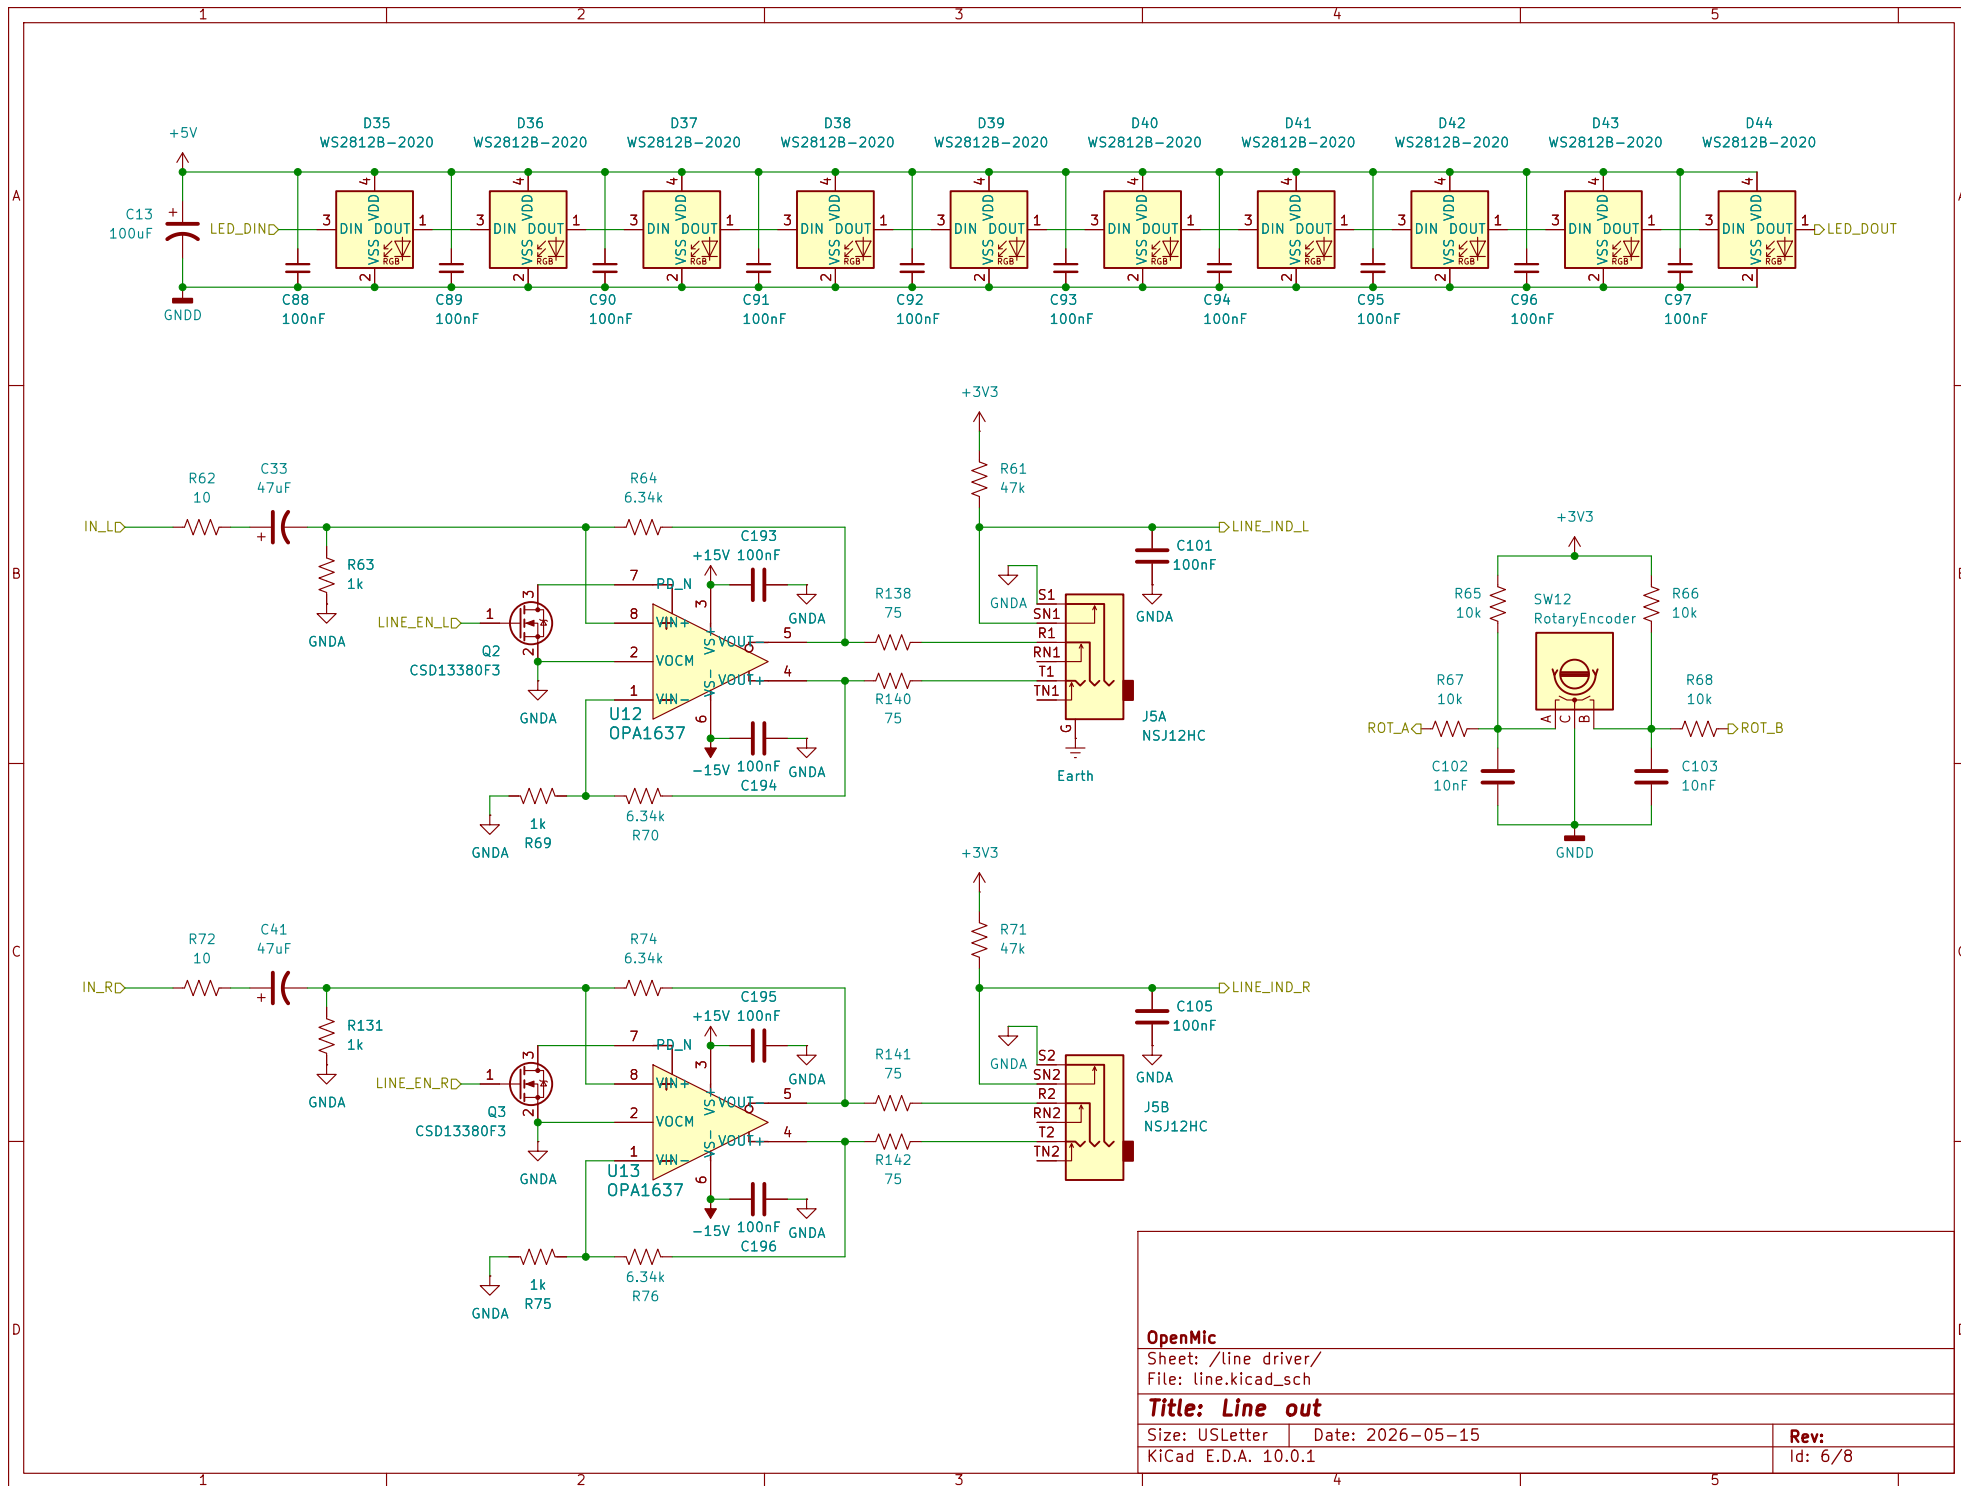

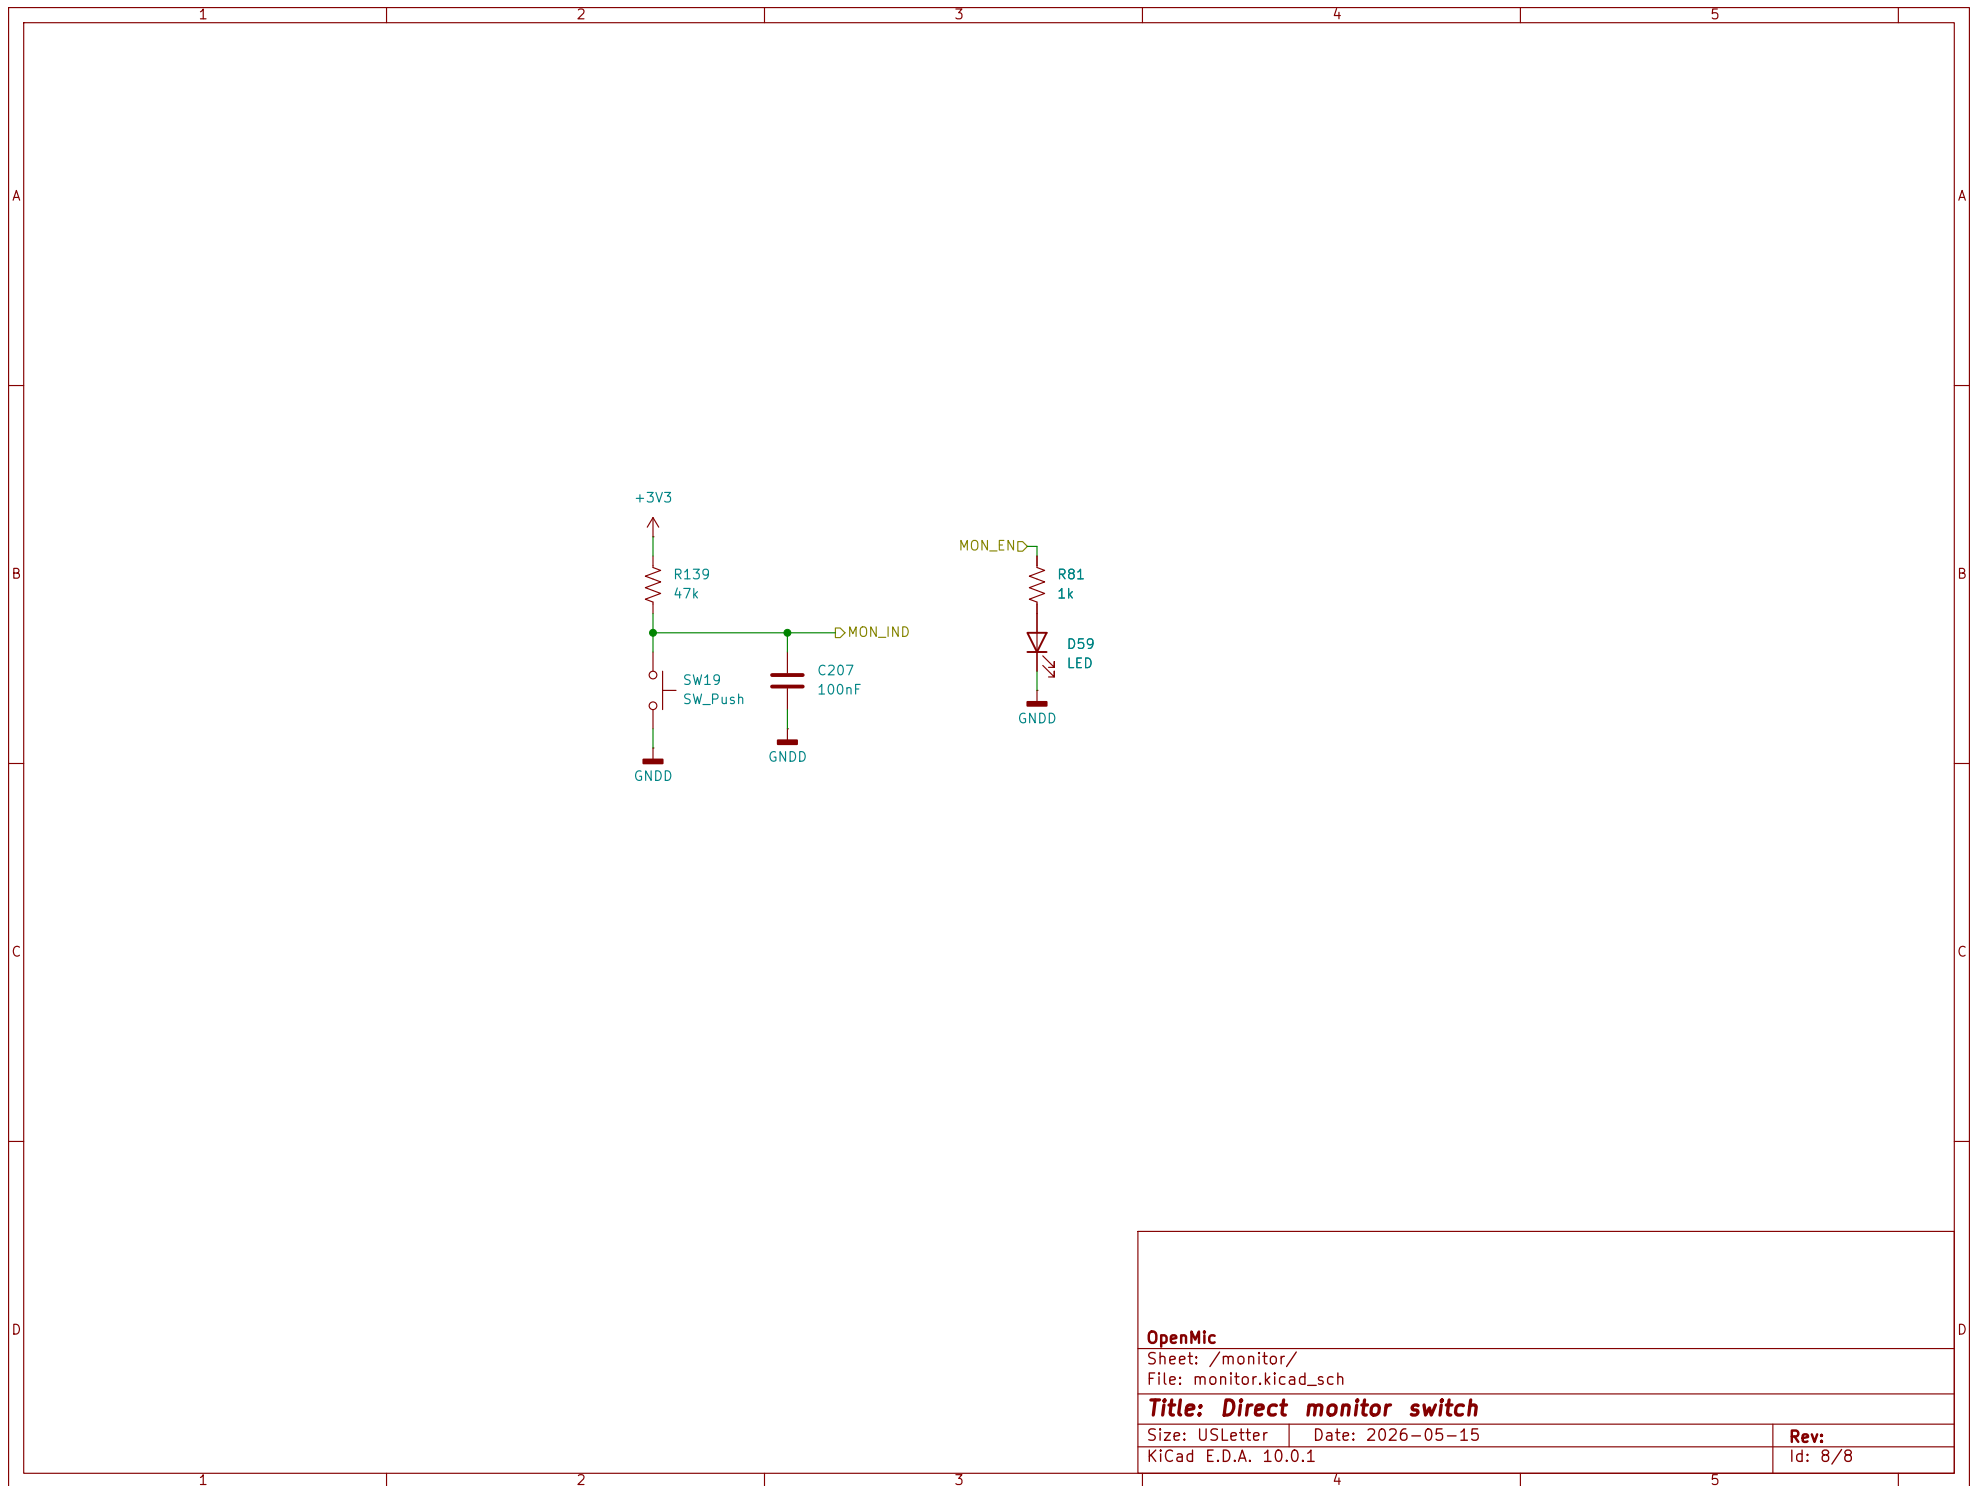

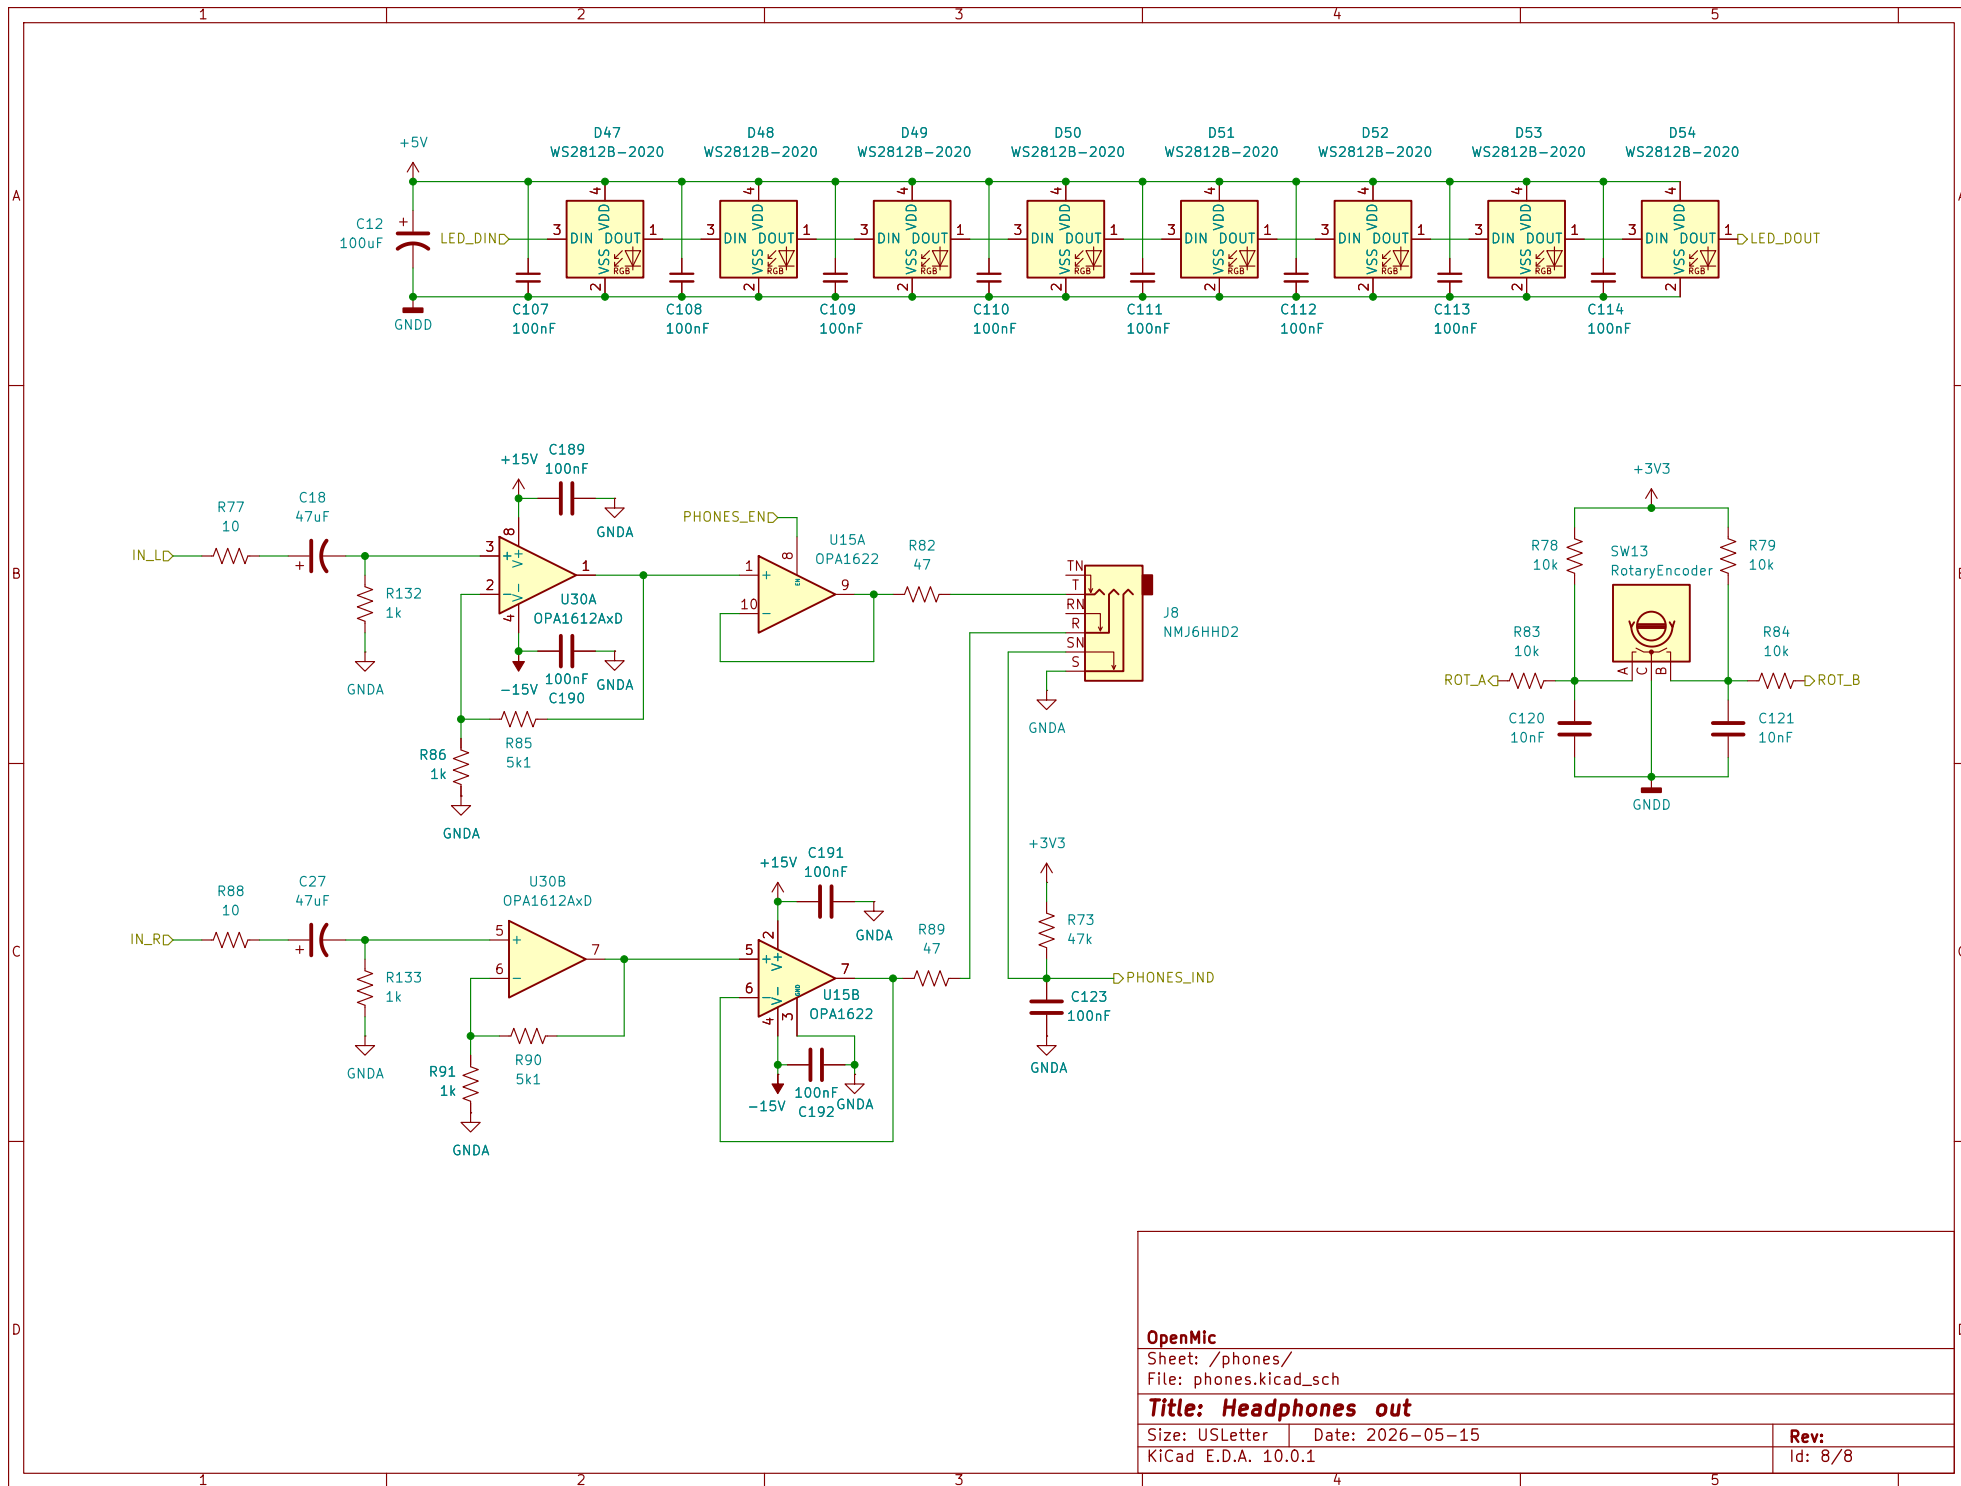


OpenMic


Sheet: /phones/
File: phones.kicad_sch

Title: Headphones out

Size: USLetter | Date: 2026-05-15
KiCad E.D.A. 10.0.1

Rev:
Id: 8/8

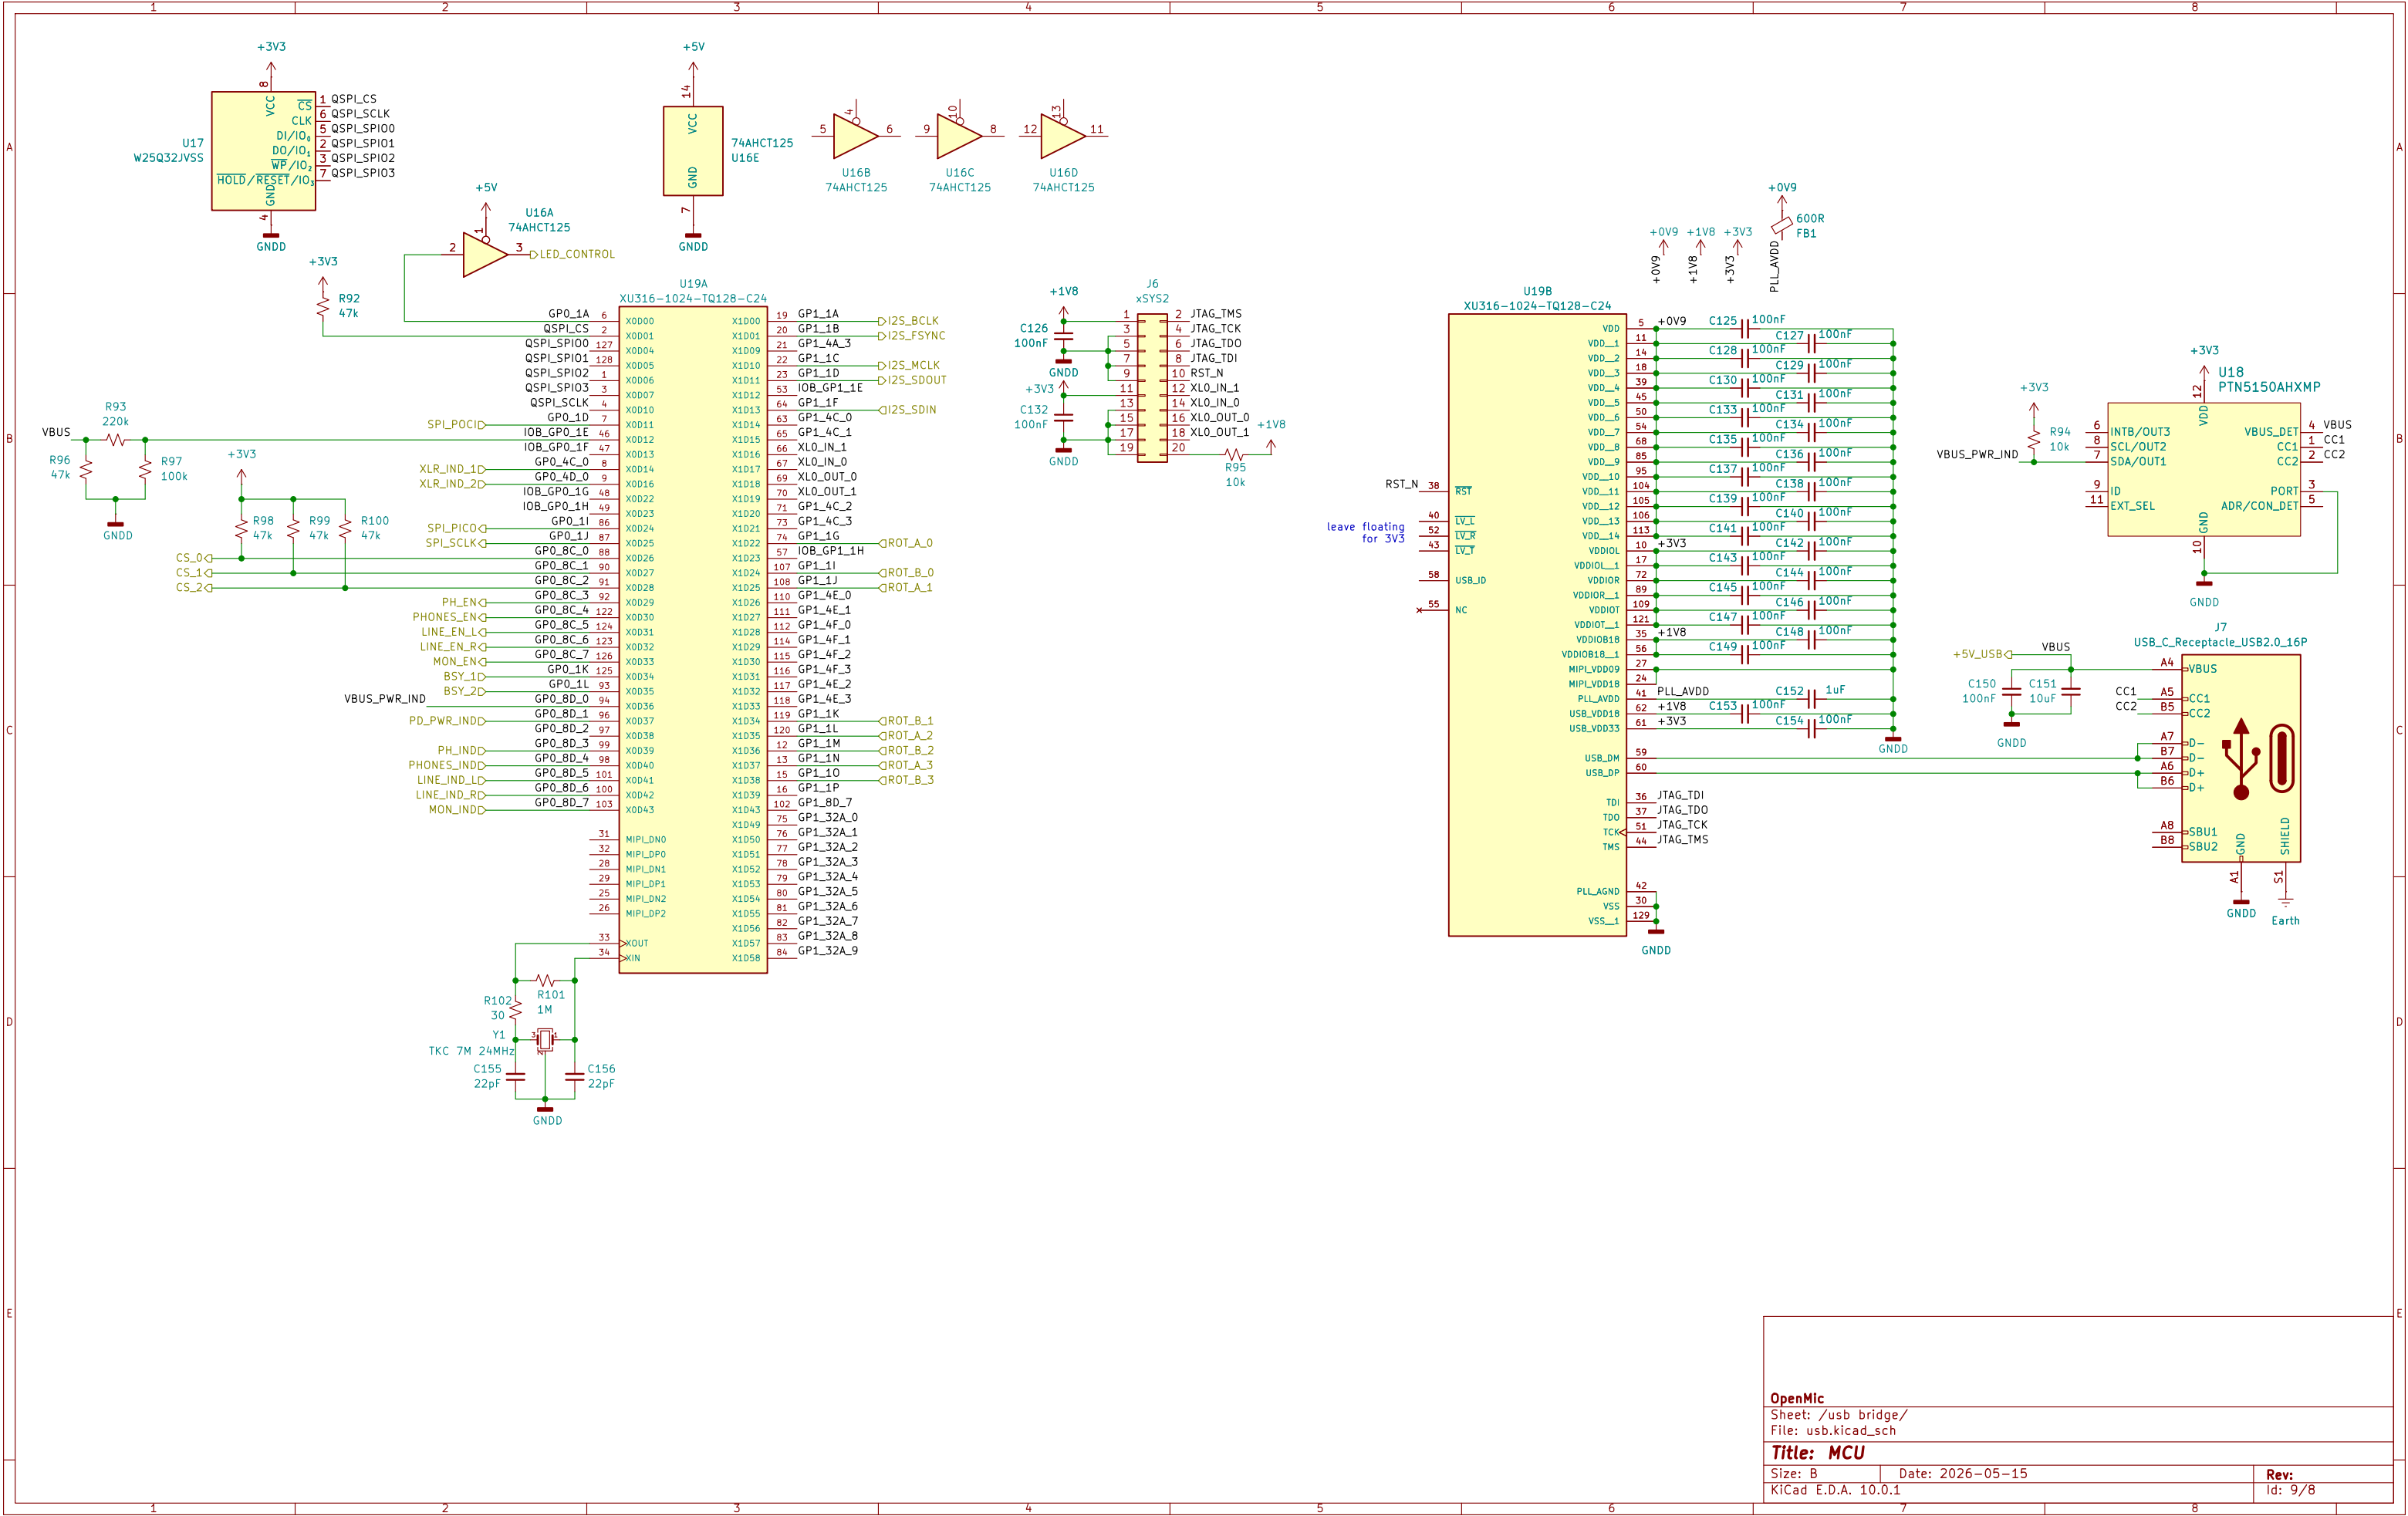

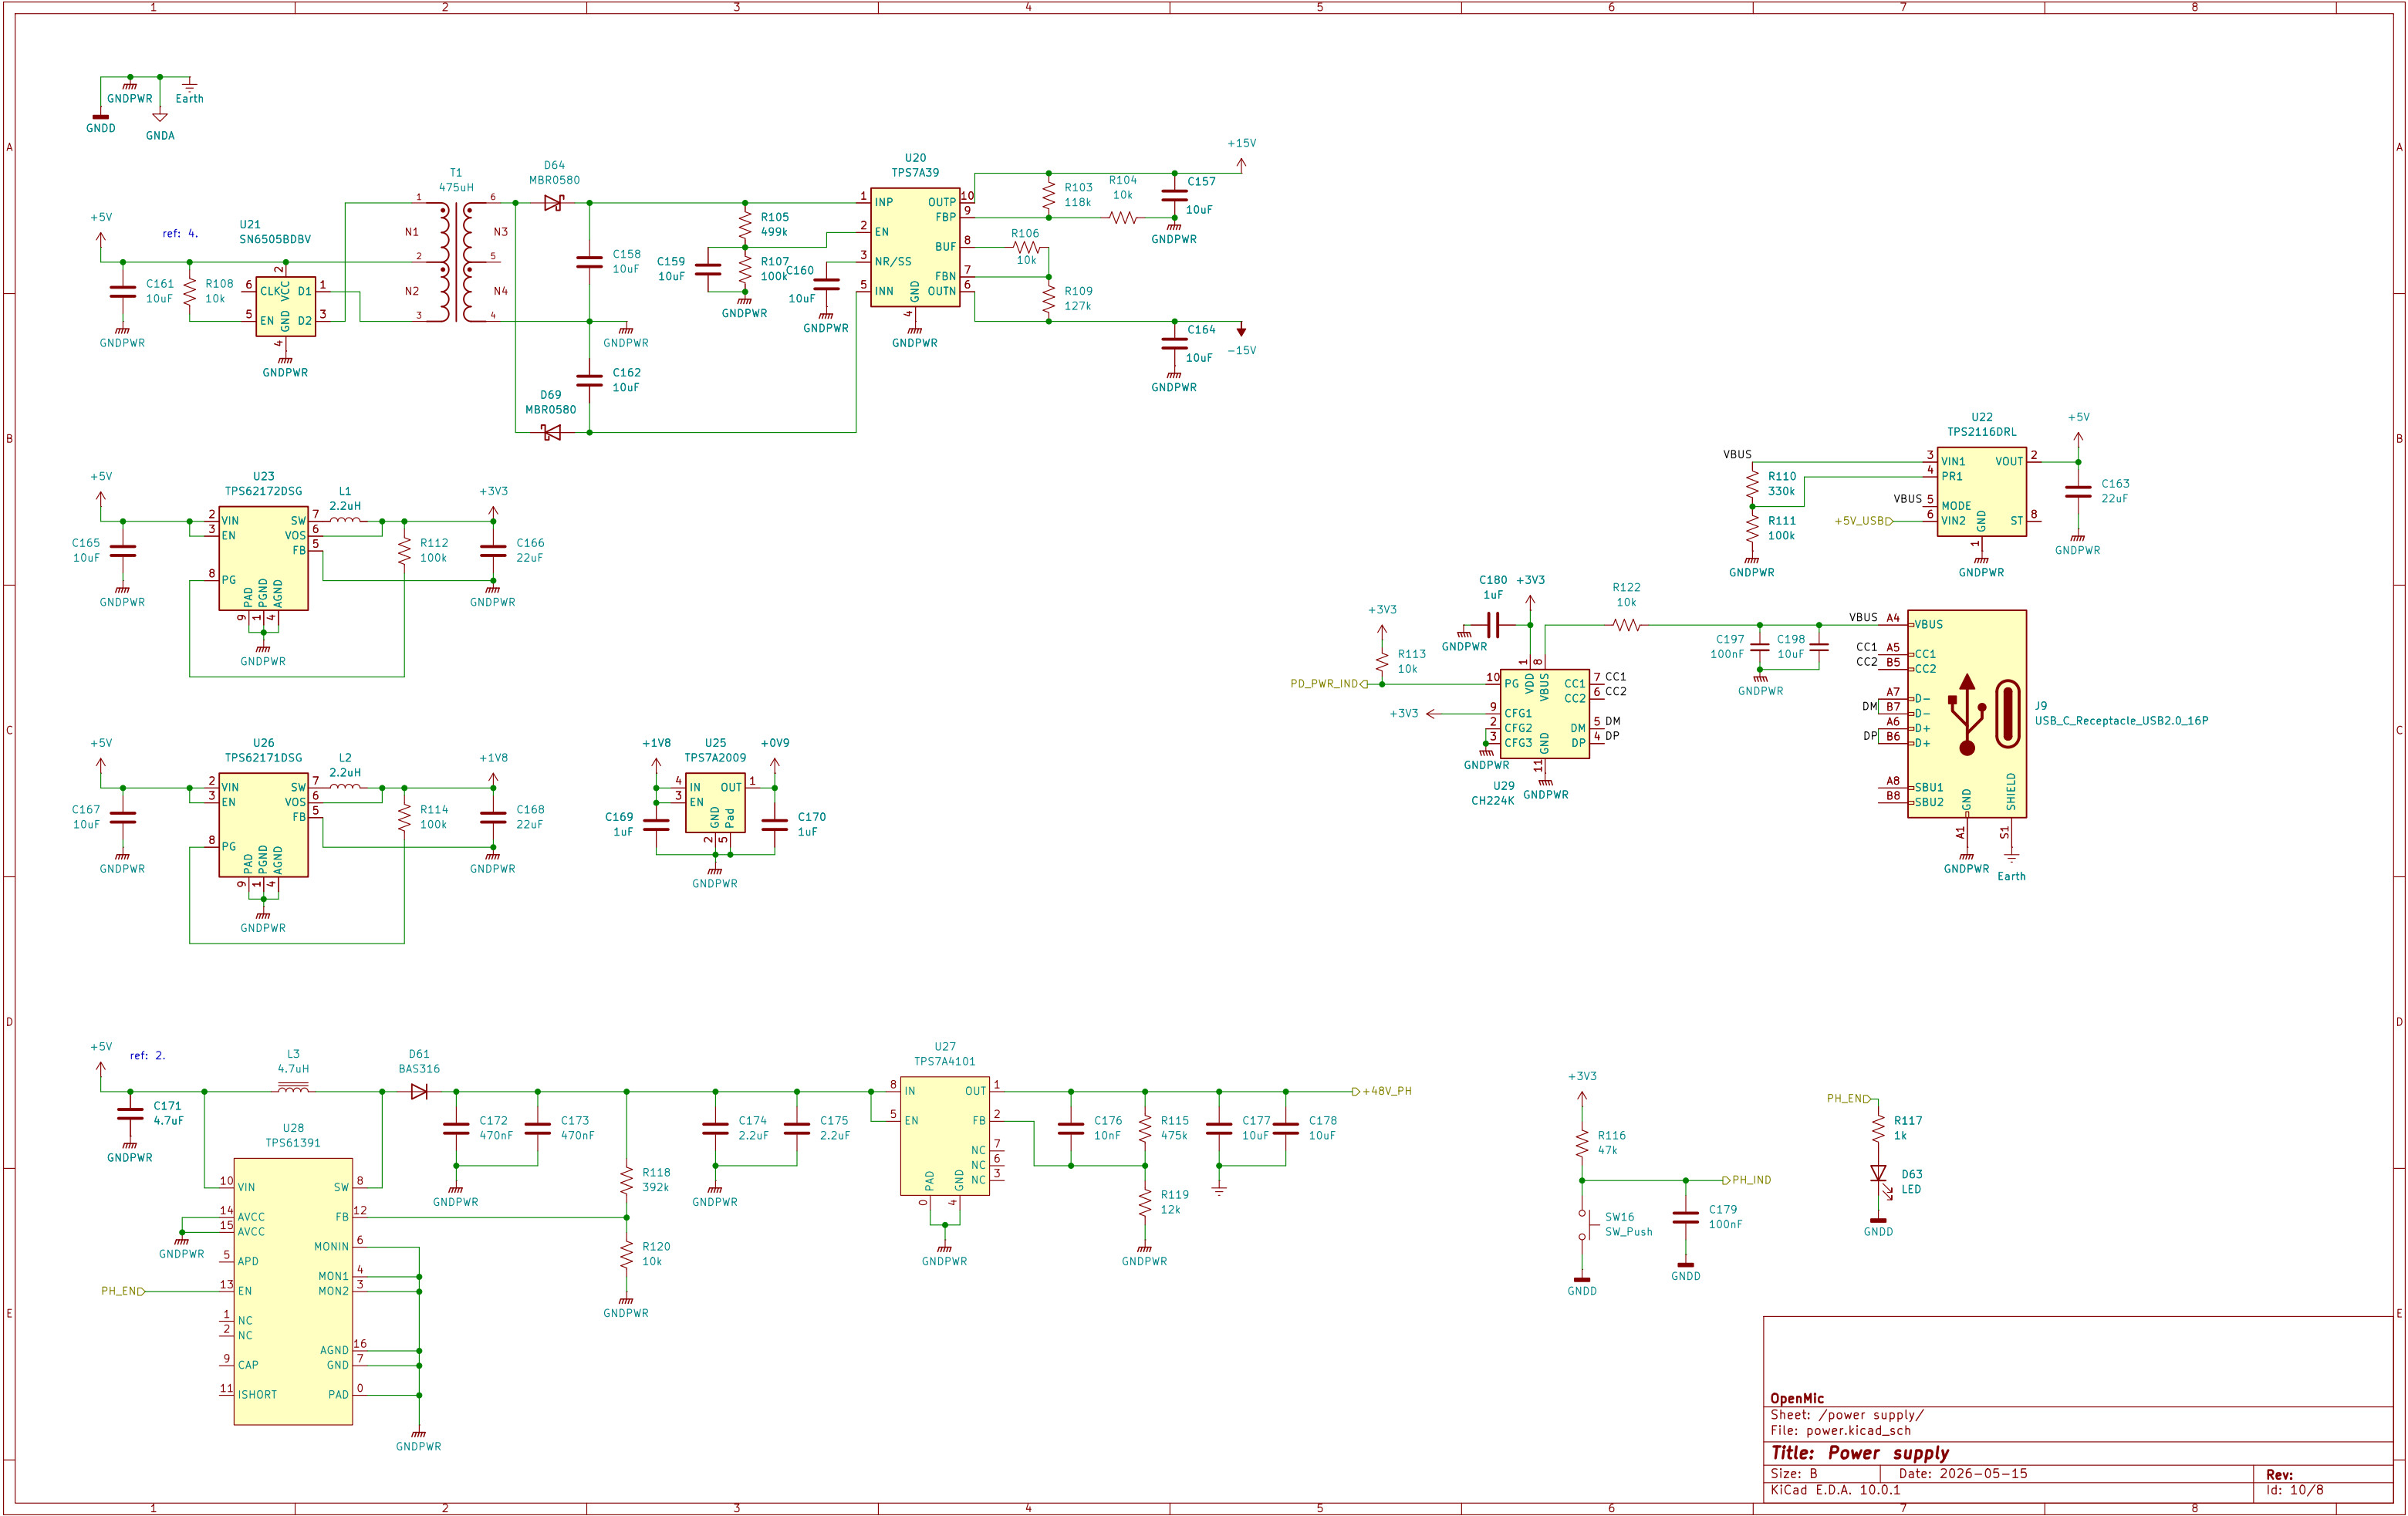

OpenMic		
Sheet: /power supply/		
File: power.kicad_sch		
Title: Power supply		
Size: B	Date: 2026-05-15	Rev:
KiCad E.D.A. 10.0.1		Id: 10/8