



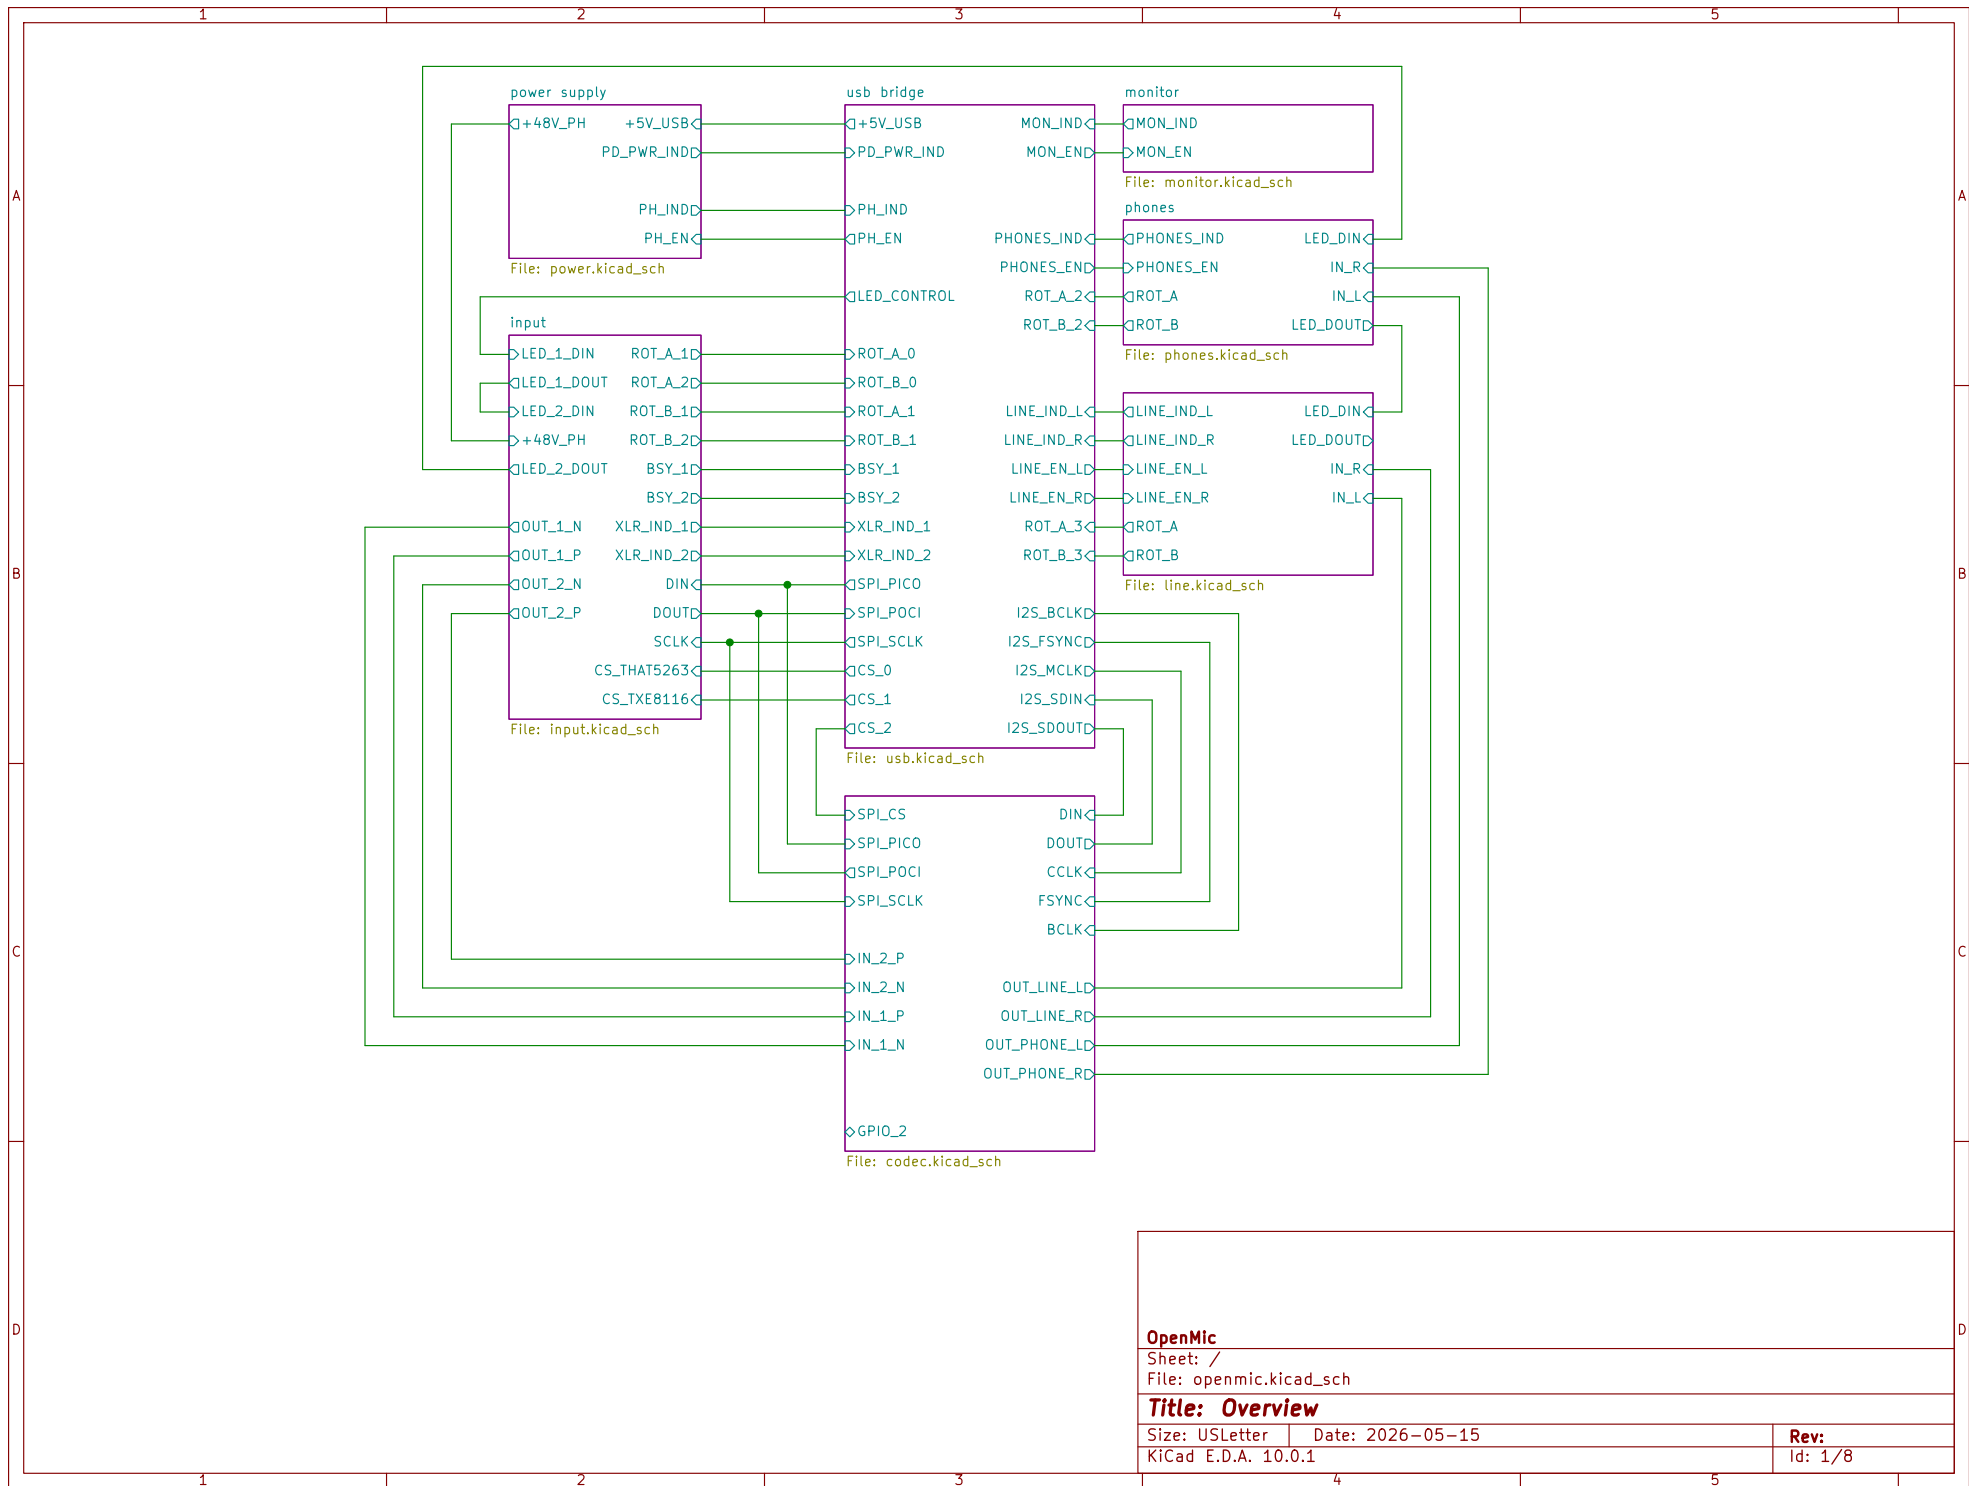

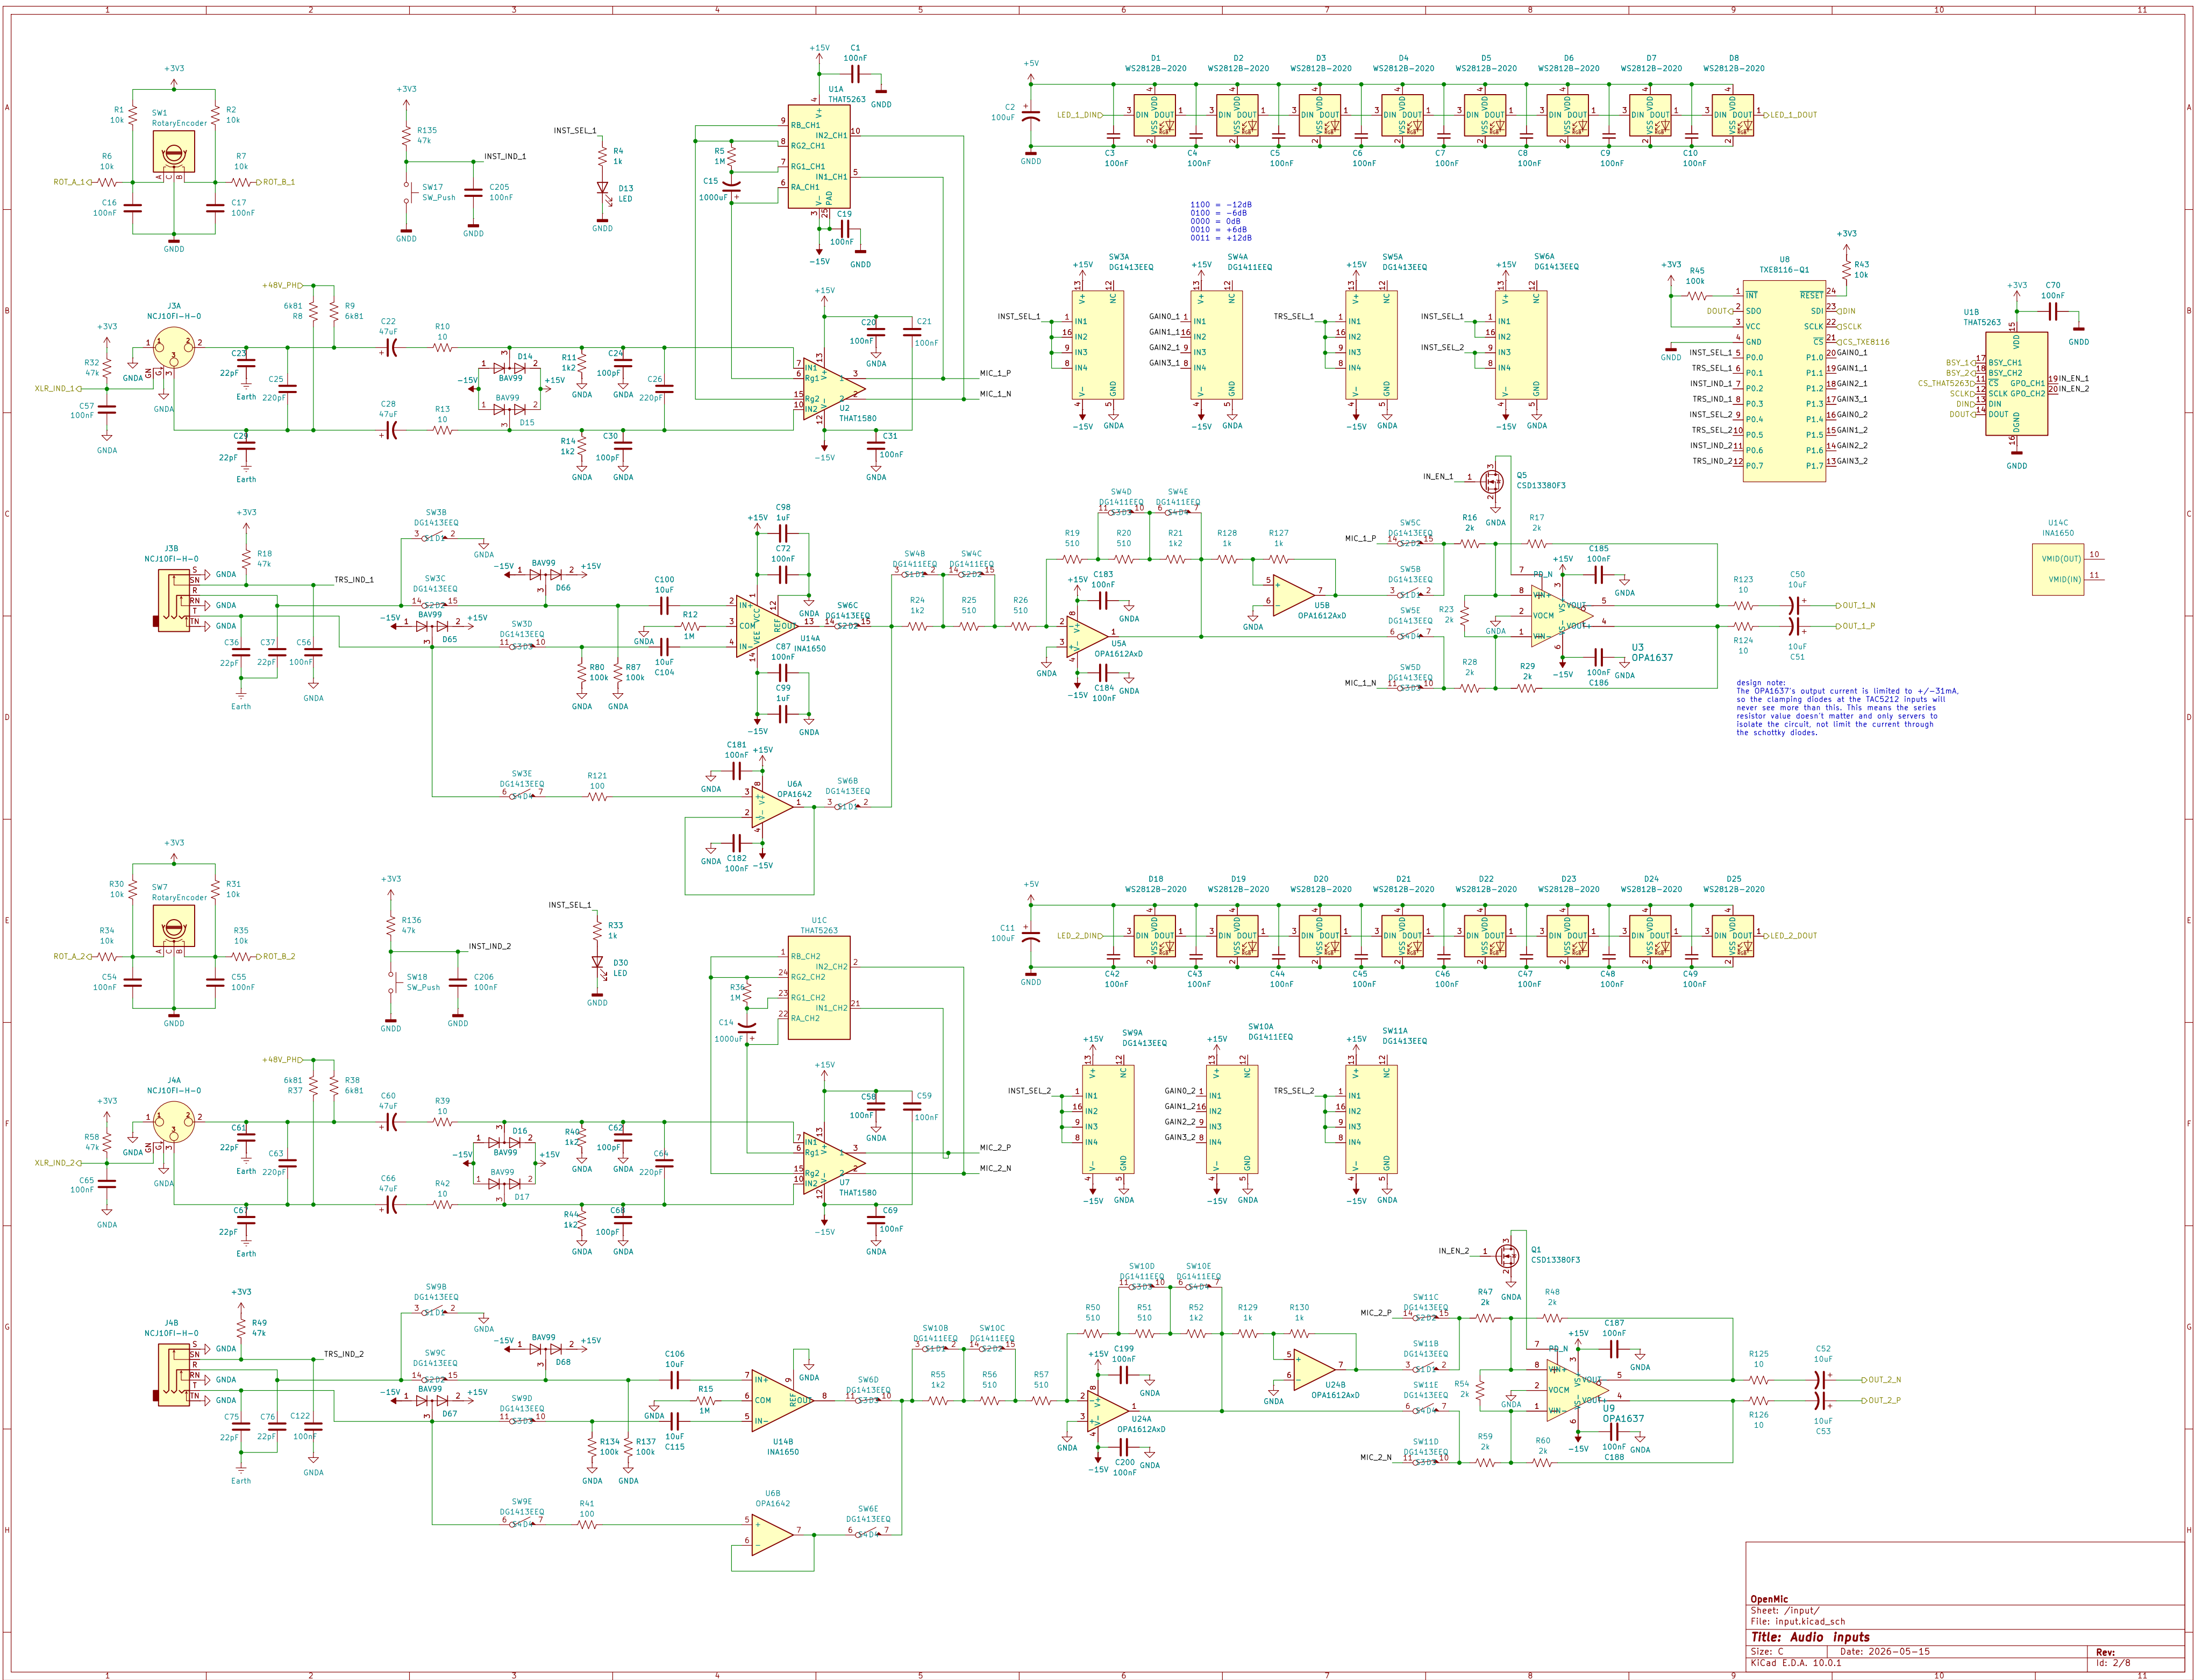

OpenMic

Sheet: /input/  
File: input.kicad\_sch


Title: Audio inputs

Size: C Date: 2026-05-15

KiCad E.D.A. 10.0.1

Rev:

Id: 2/8

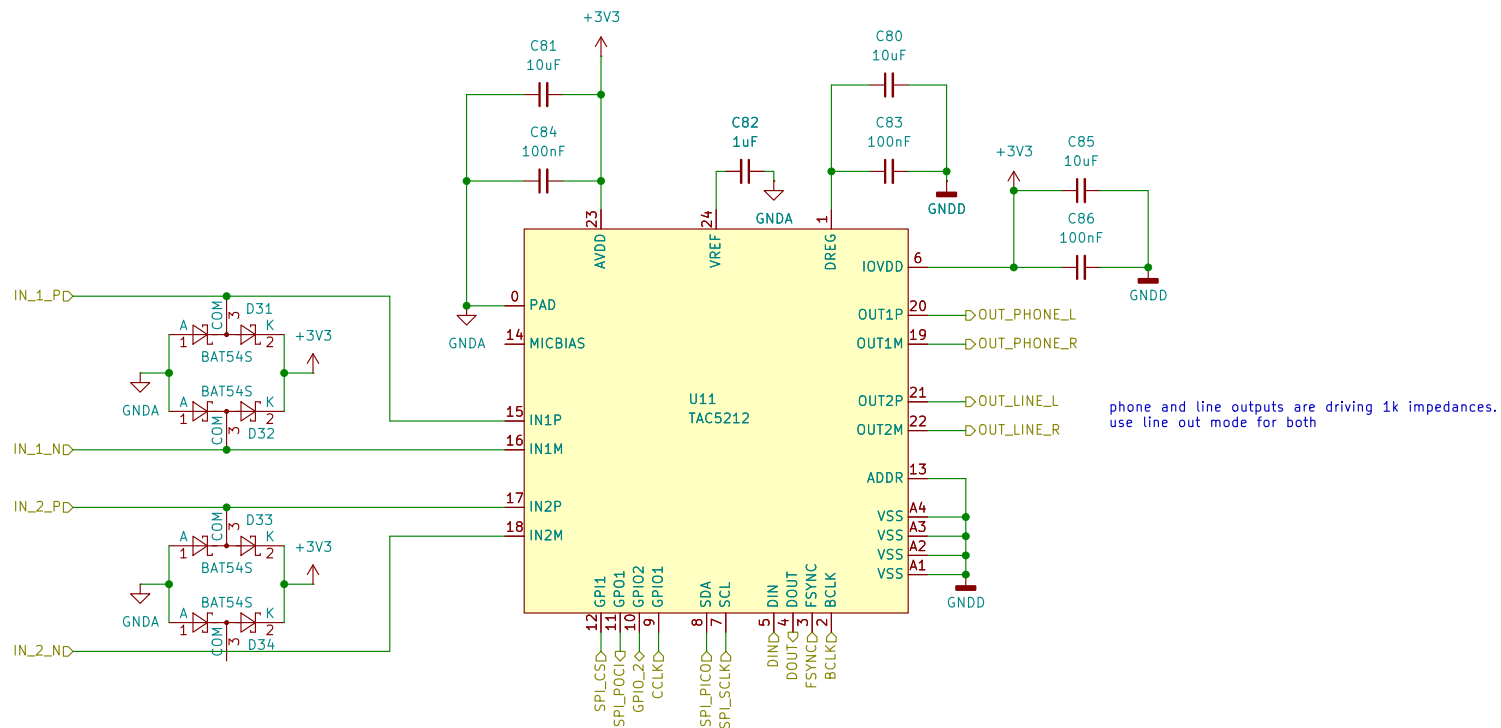

phone and line outputs are driving 1k impedances.  
use line out mode for both

use 5k input impedance (default), AC coupled  
set INCAP\_QCHG = 3d (50ms) to match the 40ms charge time of the 10uF cap


#### OpenMic

Sheet: /codec/  
File: codec.kicad\_sch

#### Title: Audio codec

Size: USLetter Date: 2026-05-15  
KiCad E.D.A. 10.0.1

Rev:  
Id: 4/8

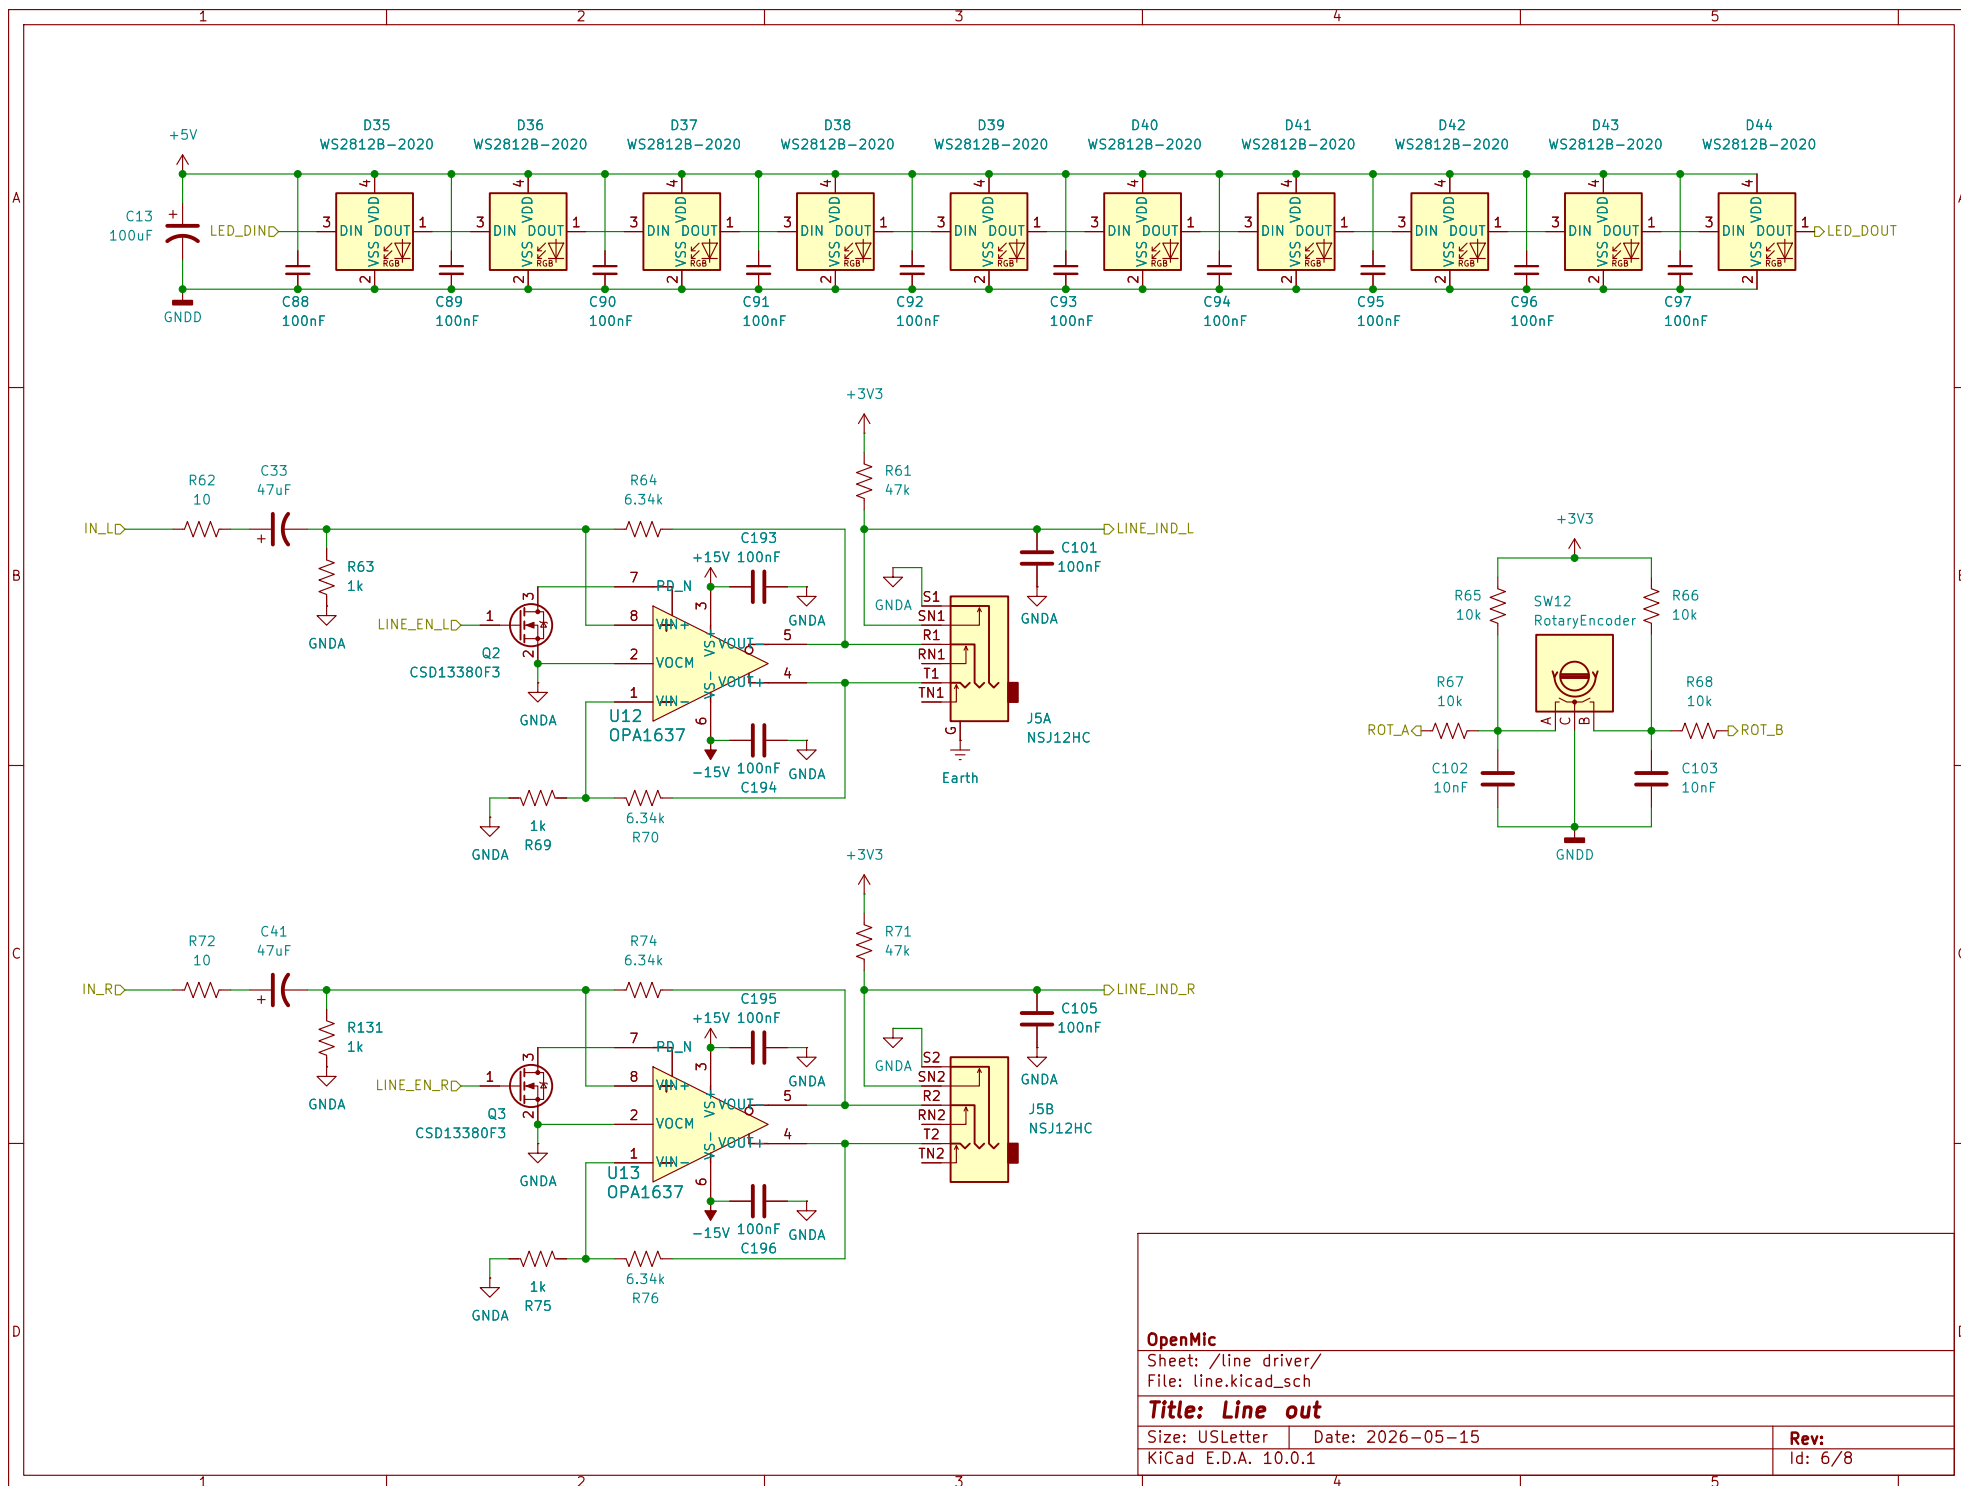


OpenMic


Sheet: /line driver/  
File: line.kicad\_sch


**Title: Line out**

Size: USLetter | Date: 2026-05-15  
KiCad E.D.A. 10.0.1


Rev:  
Id: 6/8

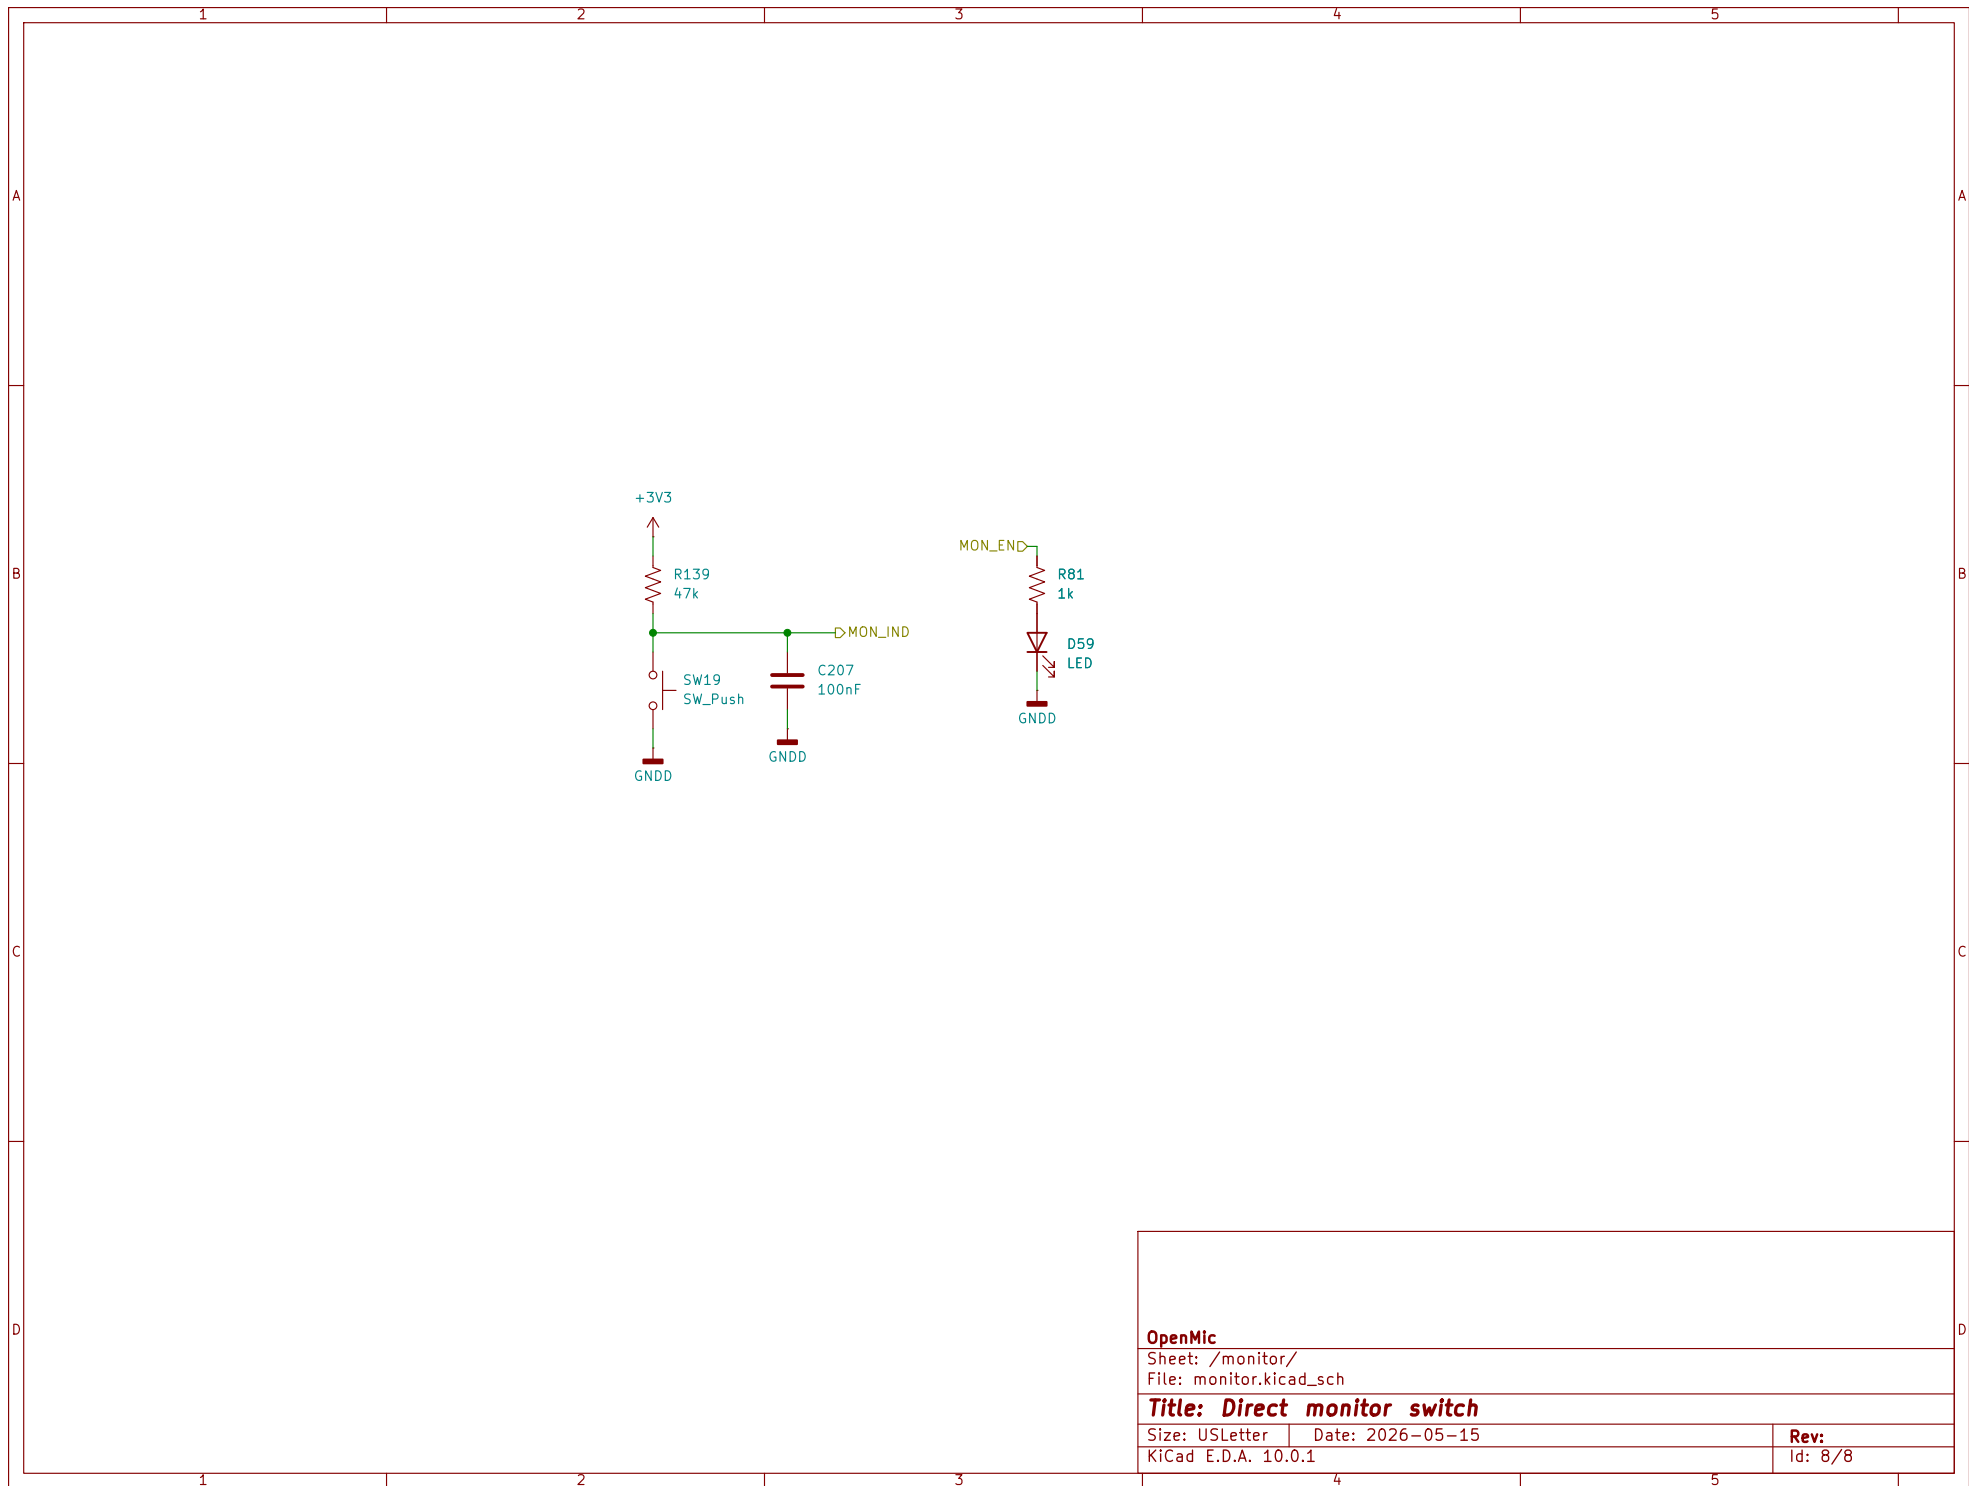

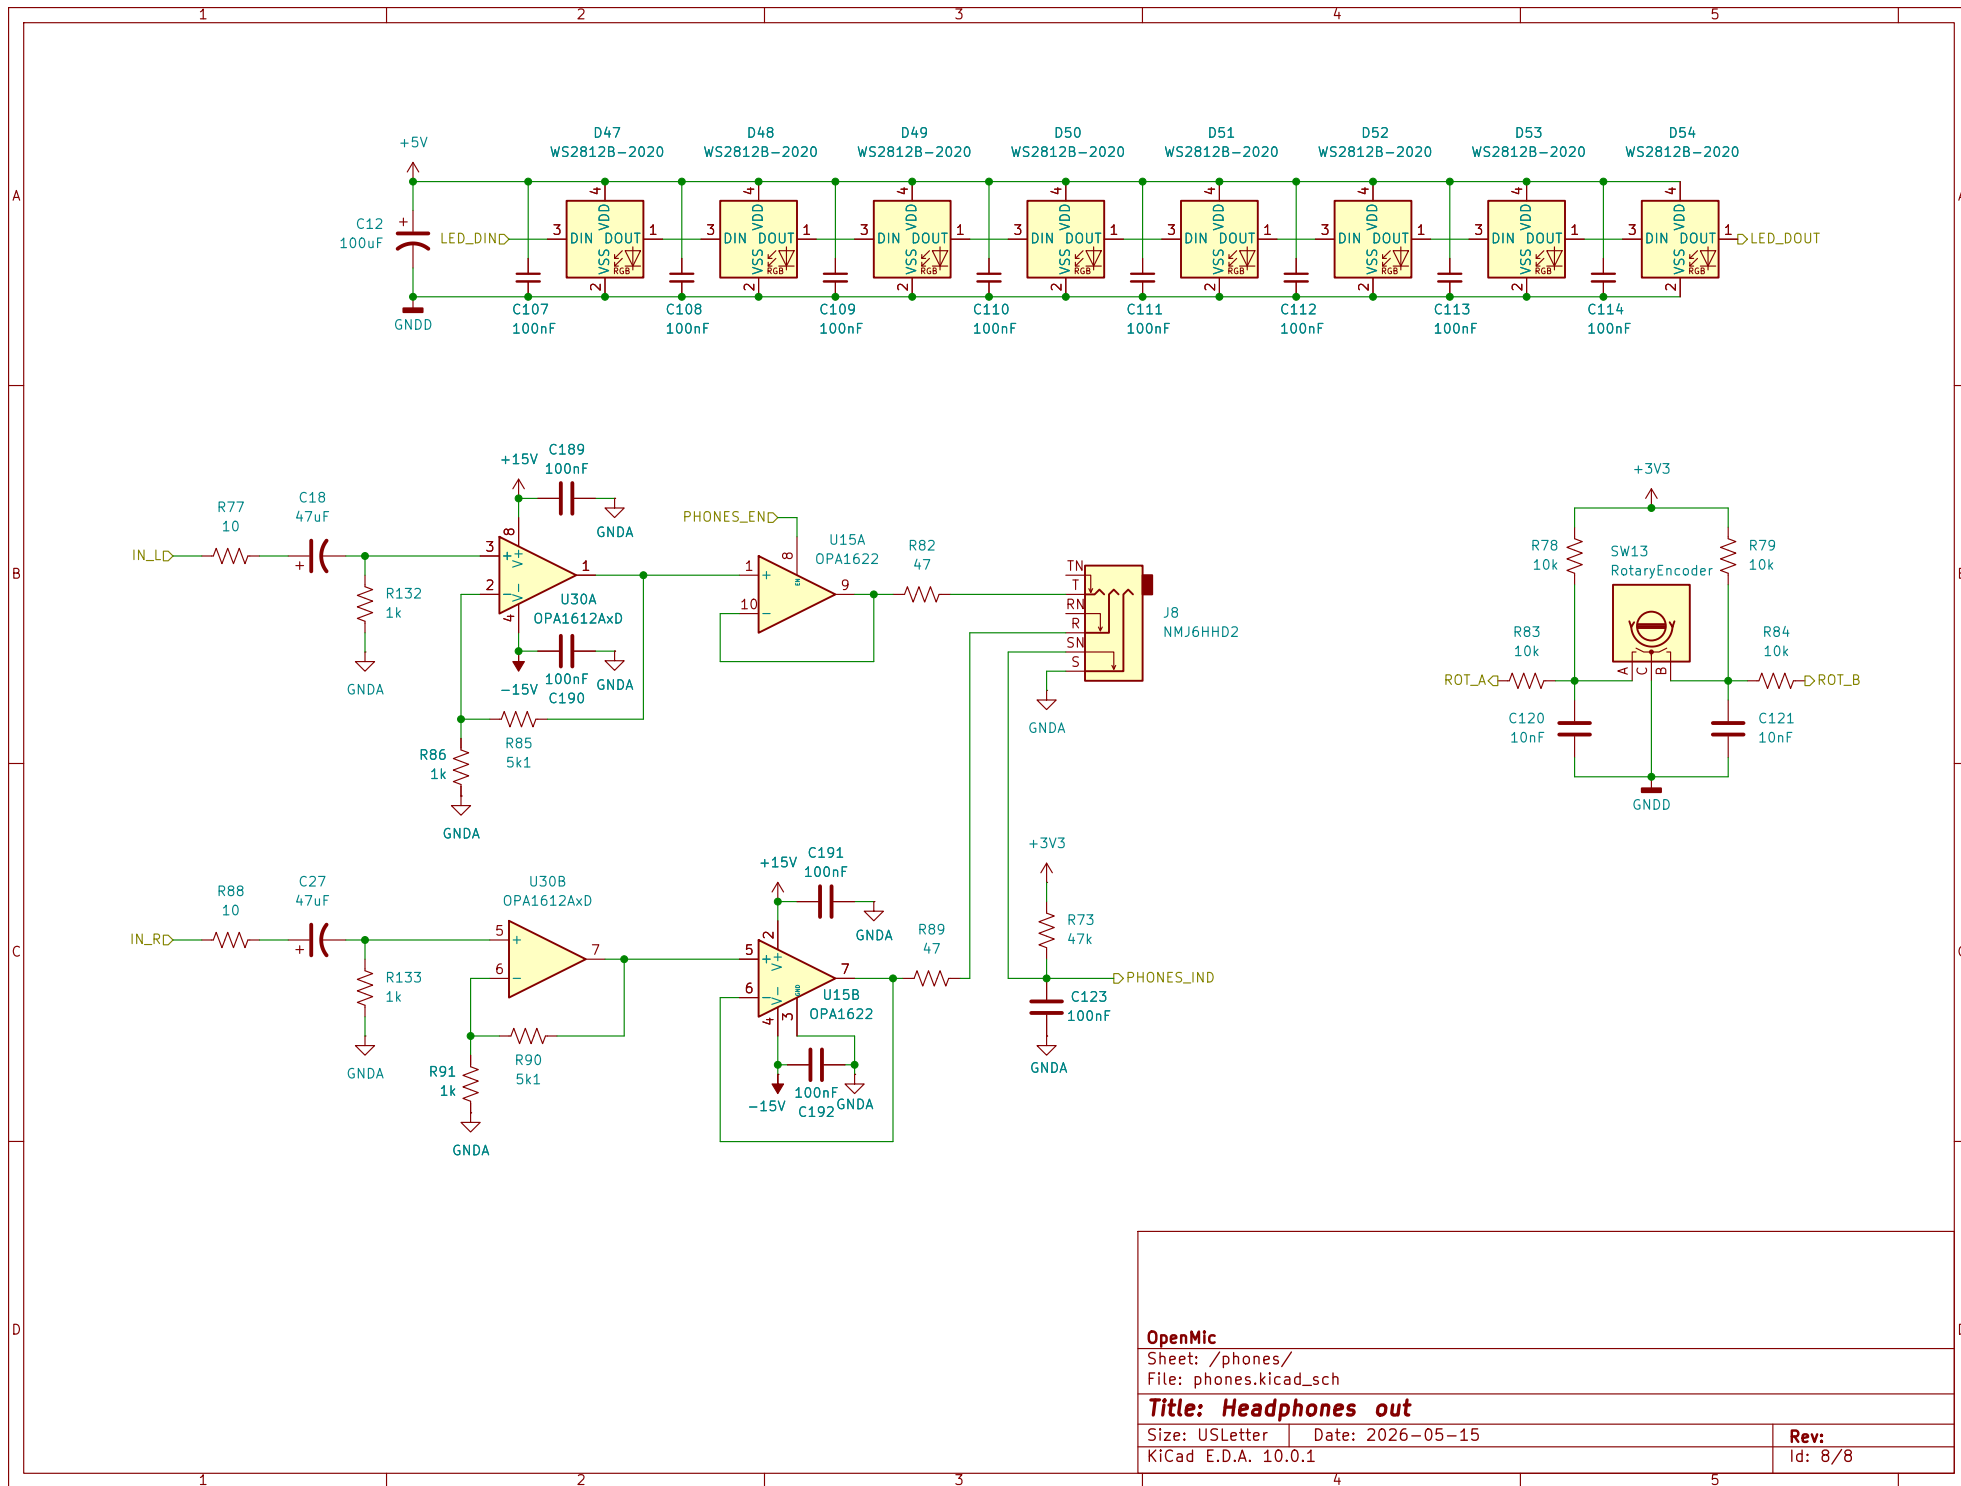

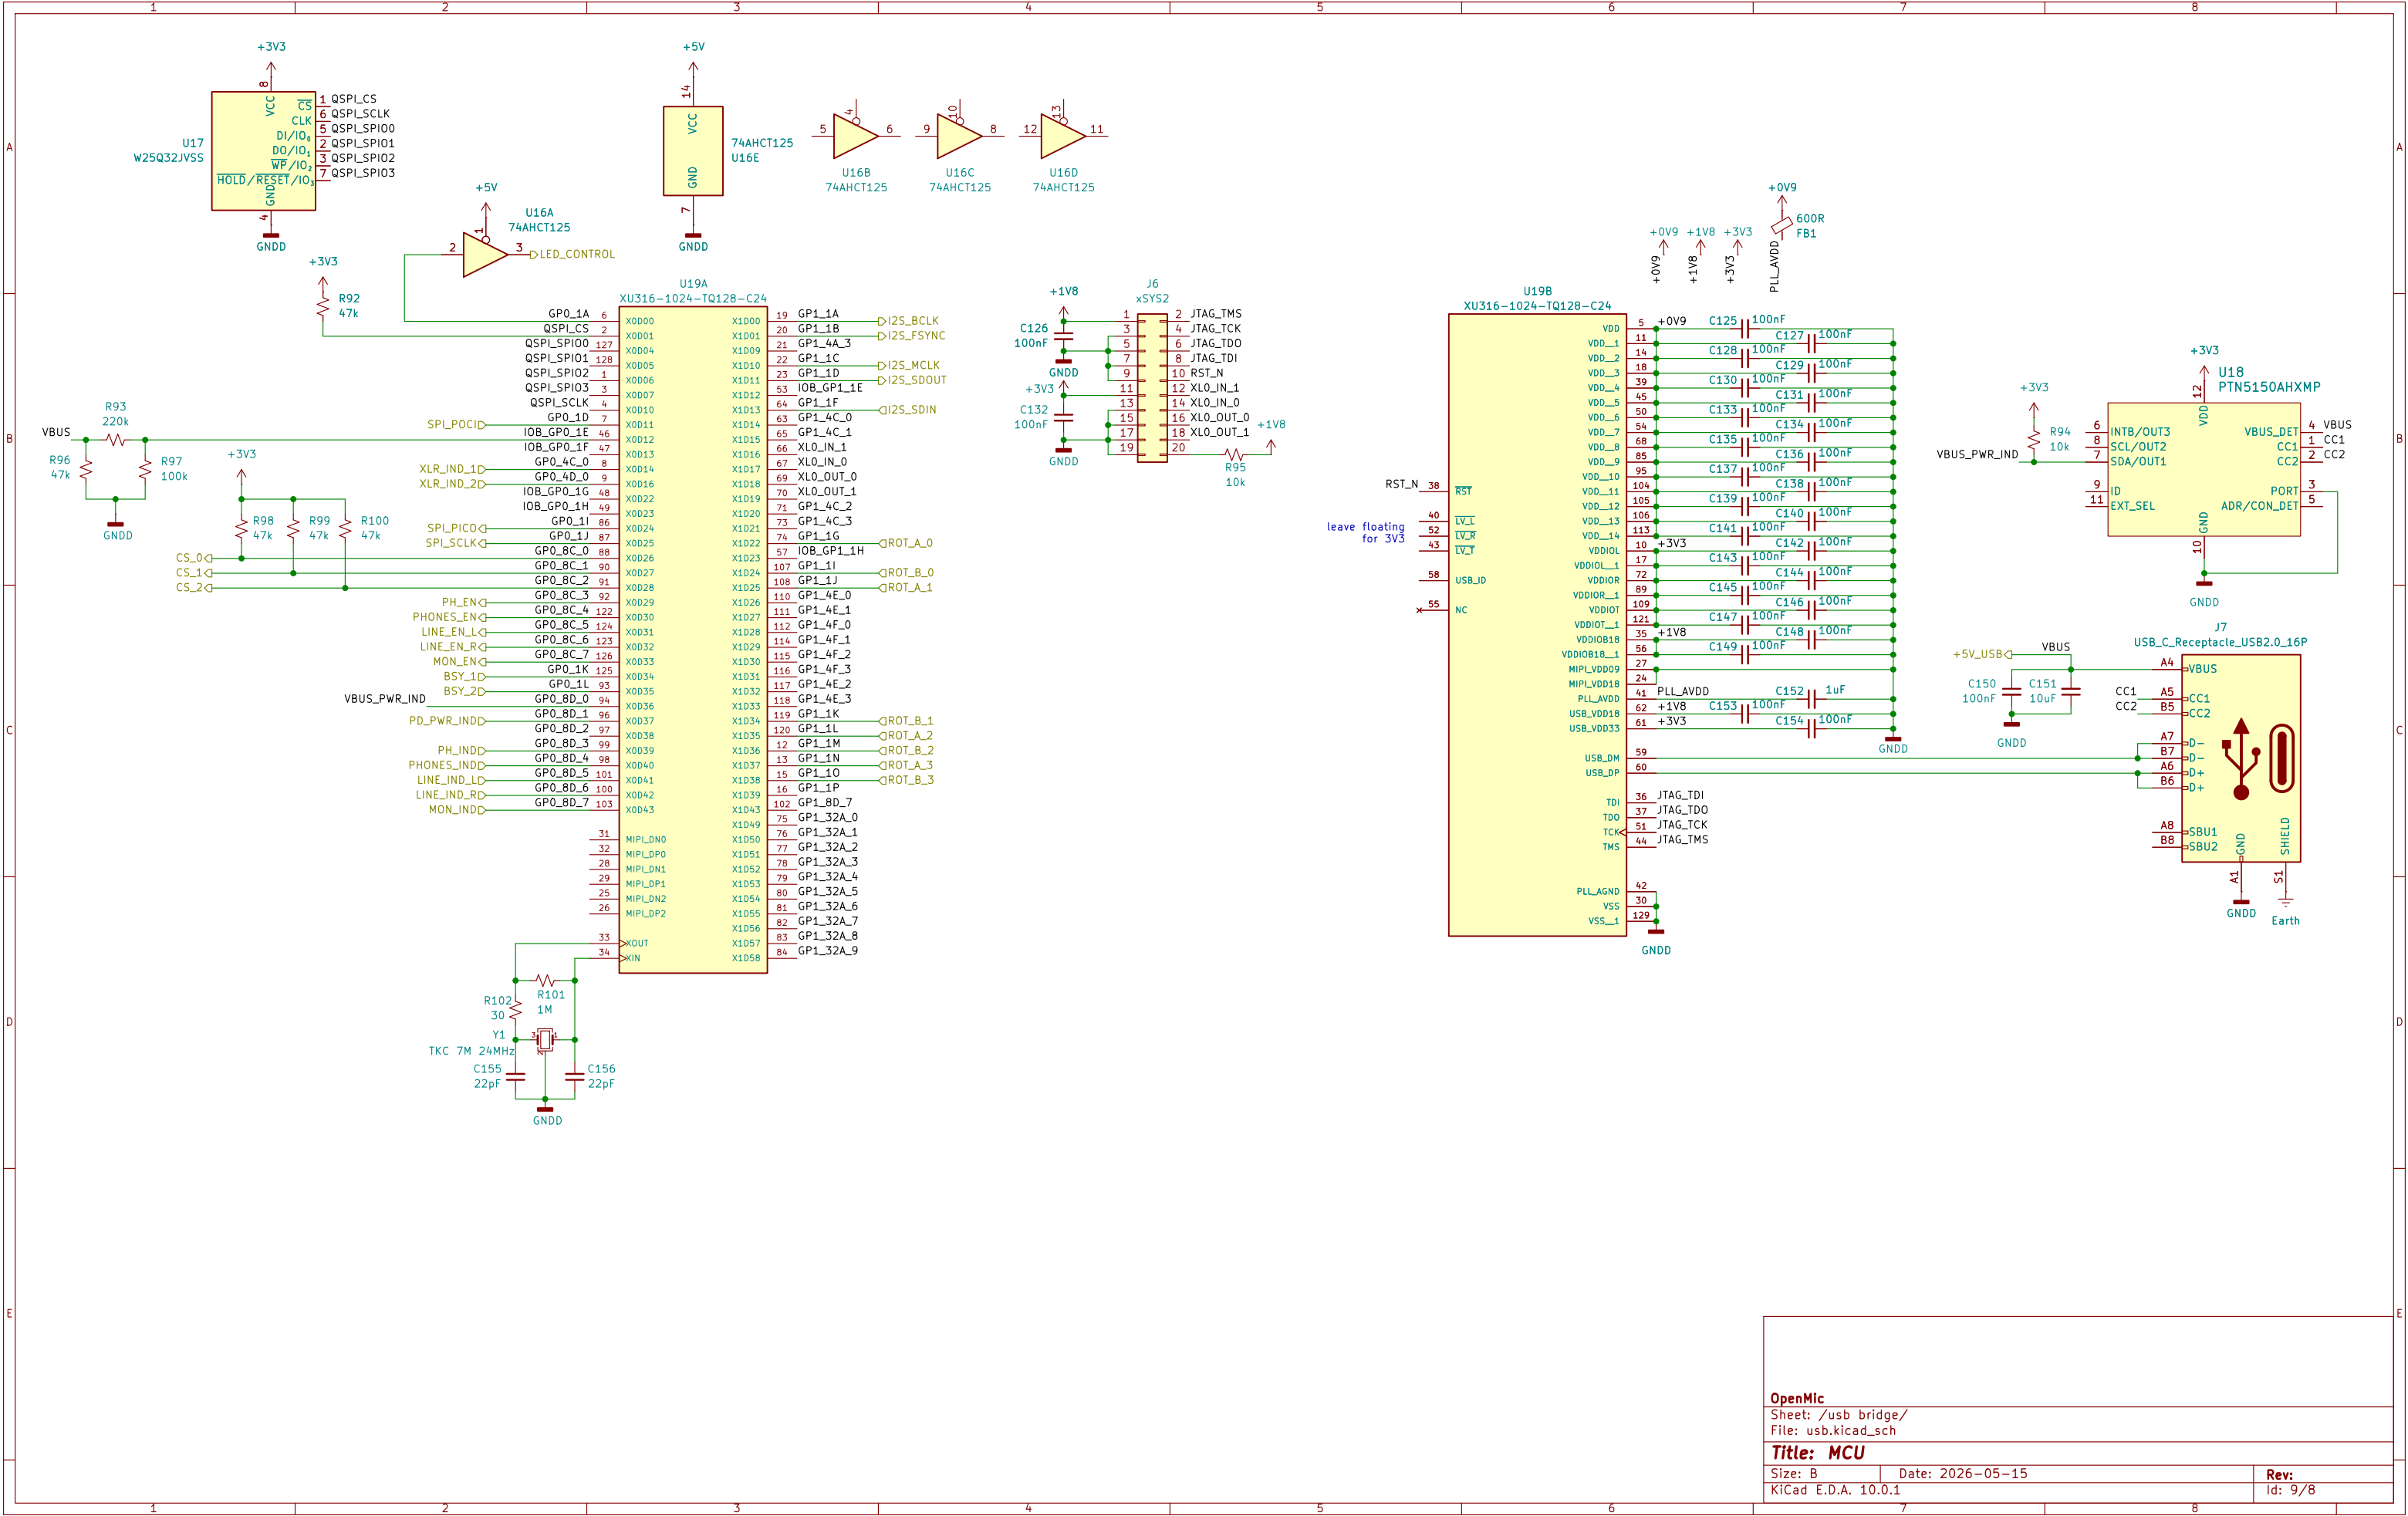



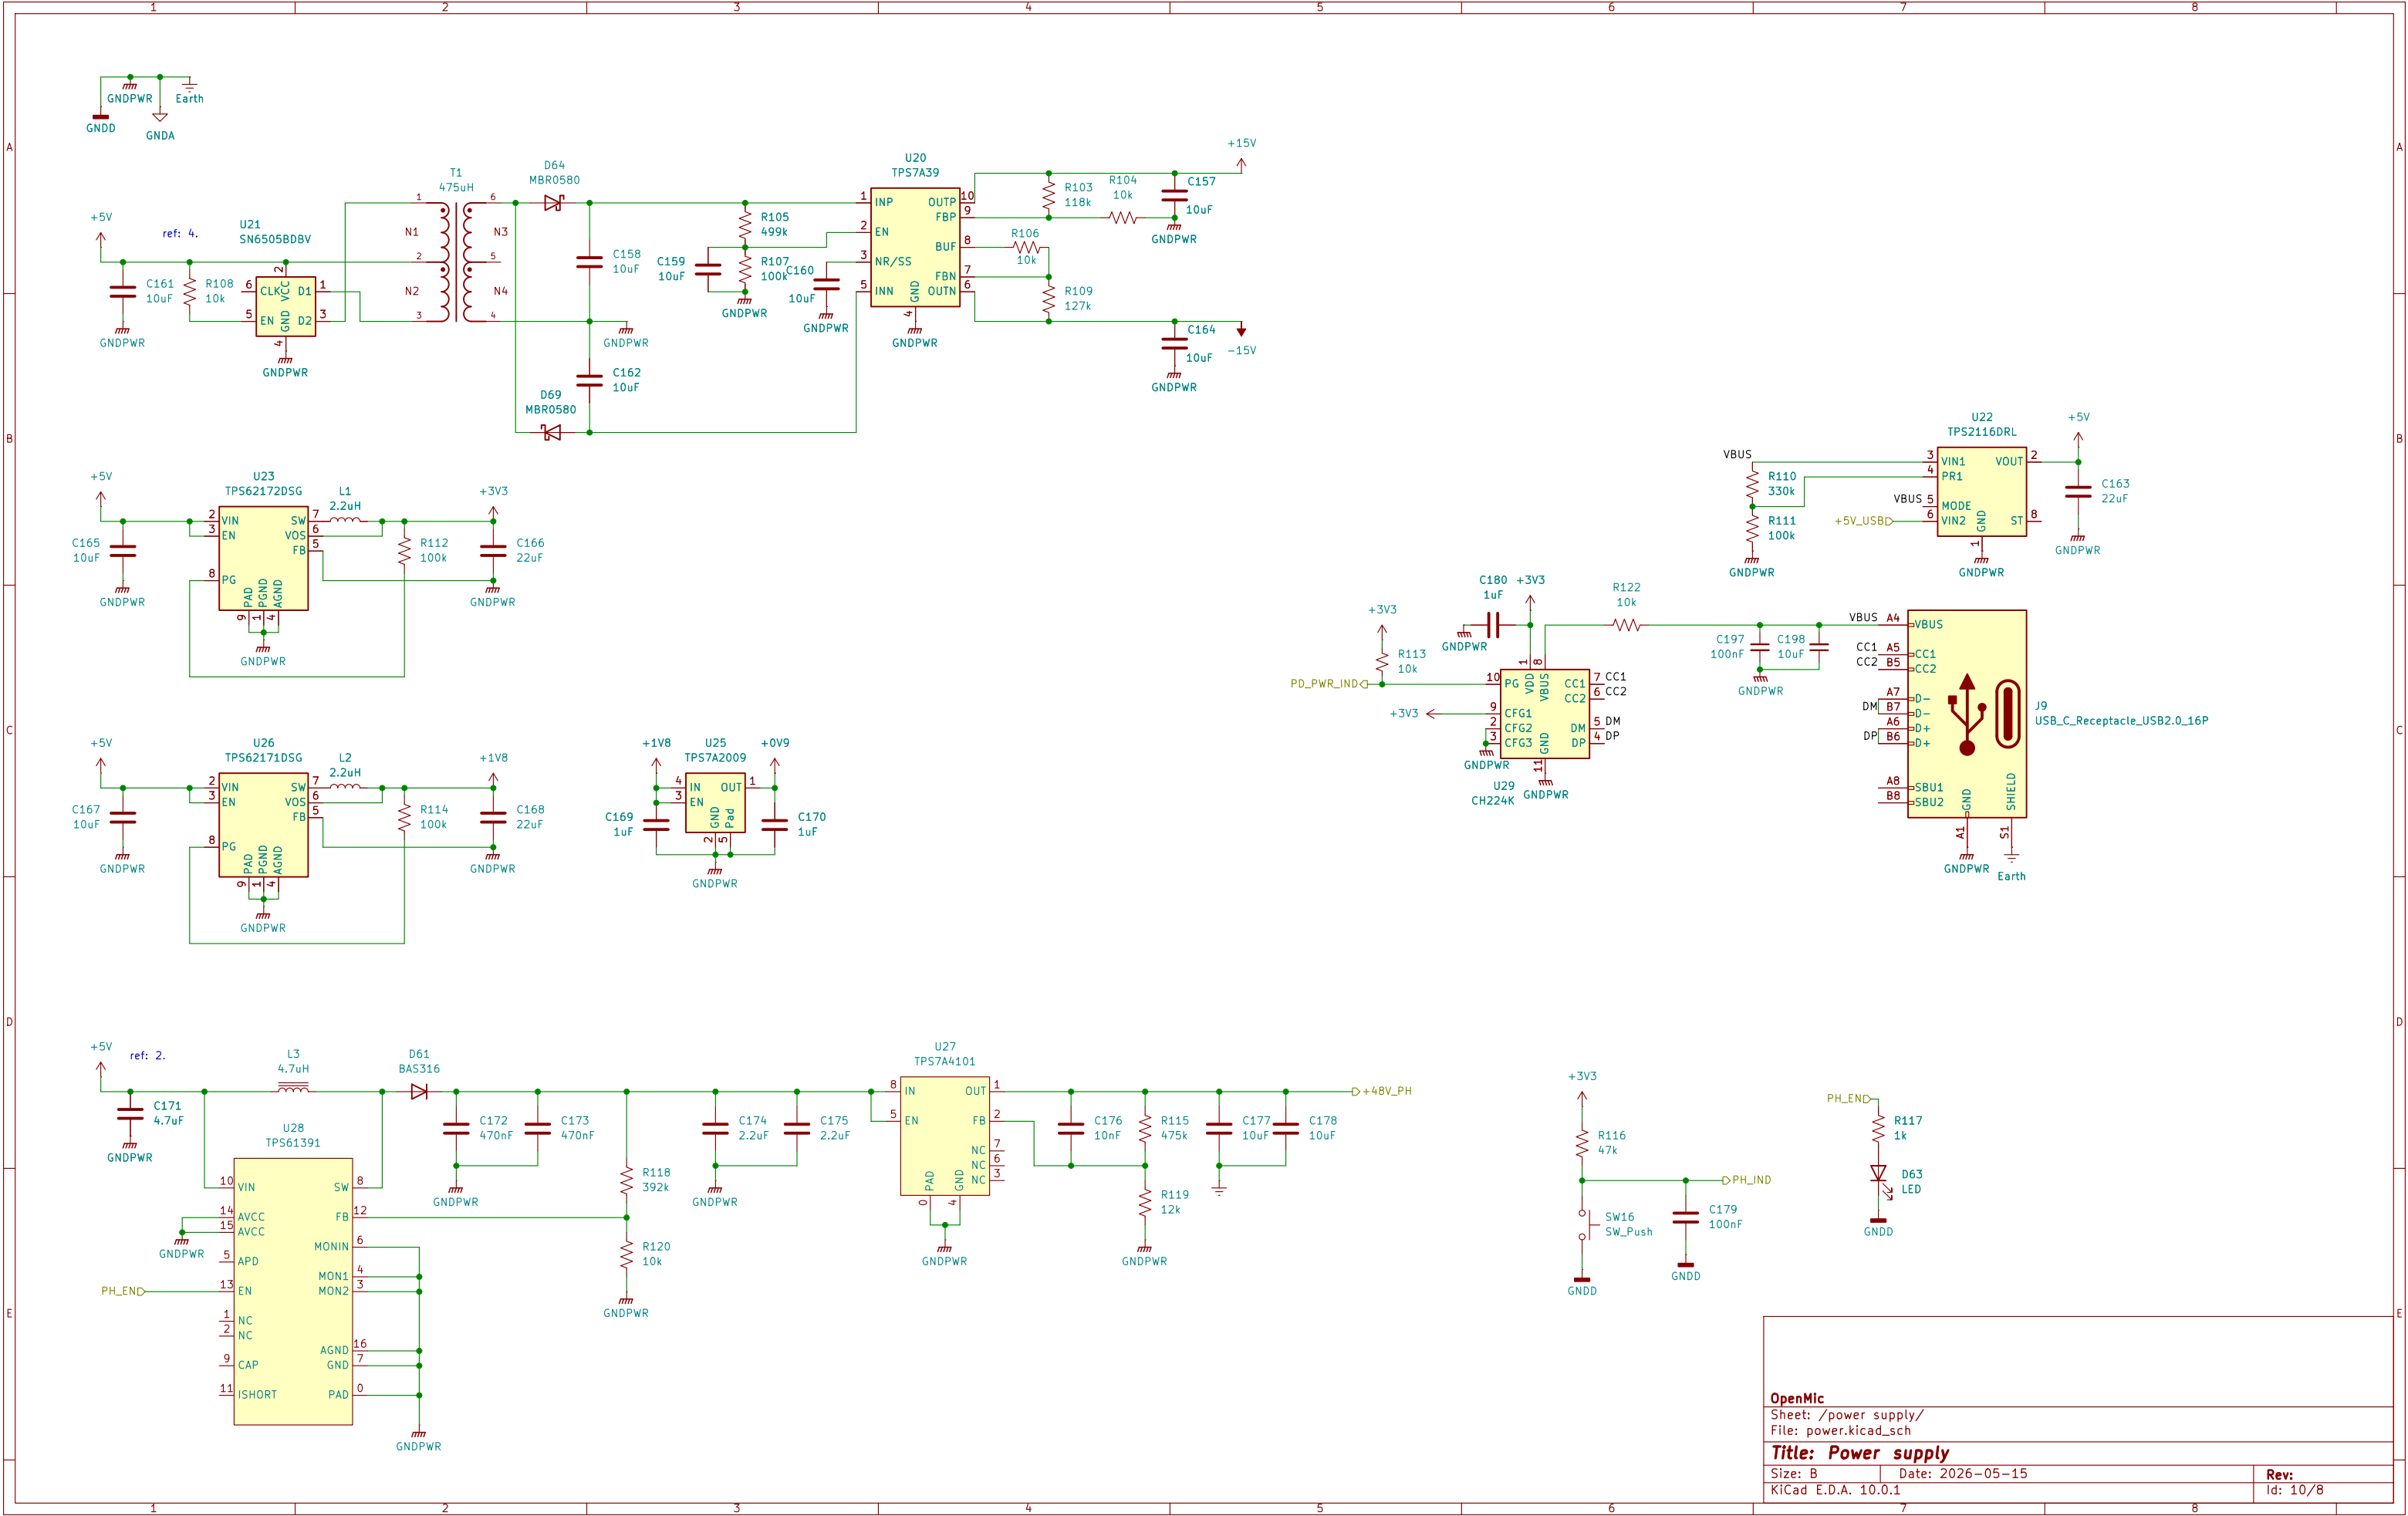

|                       |                  |          |
|-----------------------|------------------|----------|
| OpenMic               |                  |          |
| Sheet: /power supply/ |                  |          |
| File: power.kicad_sch |                  |          |
| Title: Power supply   |                  |          |
| Size: B               | Date: 2026-05-15 | Rev:     |
| KiCad E.D.A. 10.0.1   |                  | Id: 10/8 |