
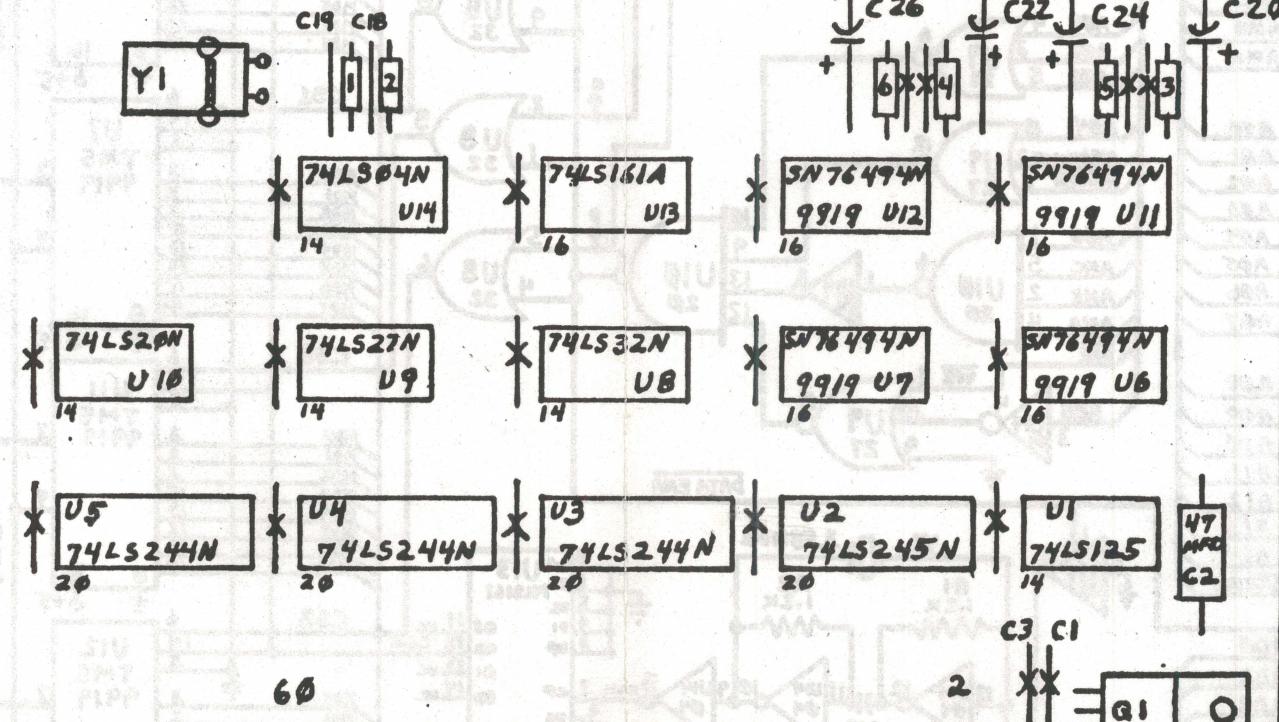


STEREO MIXER

6 - 390Ω Resistors

USE OUTPUT  
#1+2

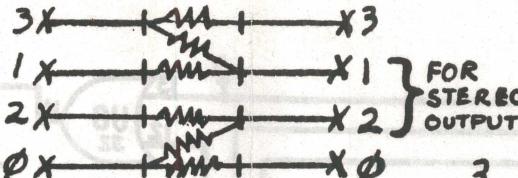

FORTI PARTS LIST

60 PIN EDGE CARD CONN.

|                                |                          |
|--------------------------------|--------------------------|
| U1                             | 74LS125                  |
| U2                             | 74LS245N                 |
| U3, U4, U5                     | 74LS244N                 |
| U6, U7, U11, U12               | (TMS9919)                |
| U8                             | 74LS32N                  |
| U9                             | 74LS27N                  |
| U10                            | 74LS20N                  |
| U13                            | 74LS161A                 |
| U14                            | 74LS04N/BCE              |
| Q1                             | (VOLTAGE REGULATOR)-7805 |
| C1, C3-C17, C21, C23, C25, C27 | .1 mfd @35v.             |
| C2                             | 47 mfd @35v.             |

COMPONENT  
LAYOUT &  
DESCRIPTION

|                          |                    |
|--------------------------|--------------------|
| C20, C22, C24, C26       | 33 mfd @35v.       |
| C18                      | .01 mfd @35v.      |
| C19                      | 33 pfd @35v.       |
| R1, R2                   | 1.2K OHM           |
| R3, R4, R5, R6           | 10 OHM             |
| MIXER RESISTORS (QTY. 6) | 390 OHM            |
| 1-PCB                    | PEB PROTO BD.      |
| CLAM SHELL SET           | (NO LONGER AVAIL.) |
| J1, J2, J3, J4           | RCA PC/JACKS       |

OPTIONAL:

IC SOCKETS:

4 each—20-PIN      5 each—16-PIN  
5 each—14-PIN      3 each—NUT&BOLT