



Next-Gen Wall Panel Solutions

ROCON
WALL PANEL SOLUTIONS

AN ISO 9000-2015 CERTIFIED COMPANY

BUILD SMART WITH ROCON

- ✓ Strong & Durable
- ✓ Space Saving
- ✓ Fast Installation
- ✓ Eco-Friendly

Rajashri Concrete Products


Kolhapur, Maharaattrra




@RAJASHRICONCRETEPRODUCTS

IT'S ABOUT TIME

ROCON PANEL BY RAJASHRI CONCRETE PRODUCTS answers the need of the hour. When the situation calls for faster completion & a long-lasting solution, our AAC Wall rises to meet the need. That is why we say, "It's About Time". Because the time has come to advance higher, further & faster.

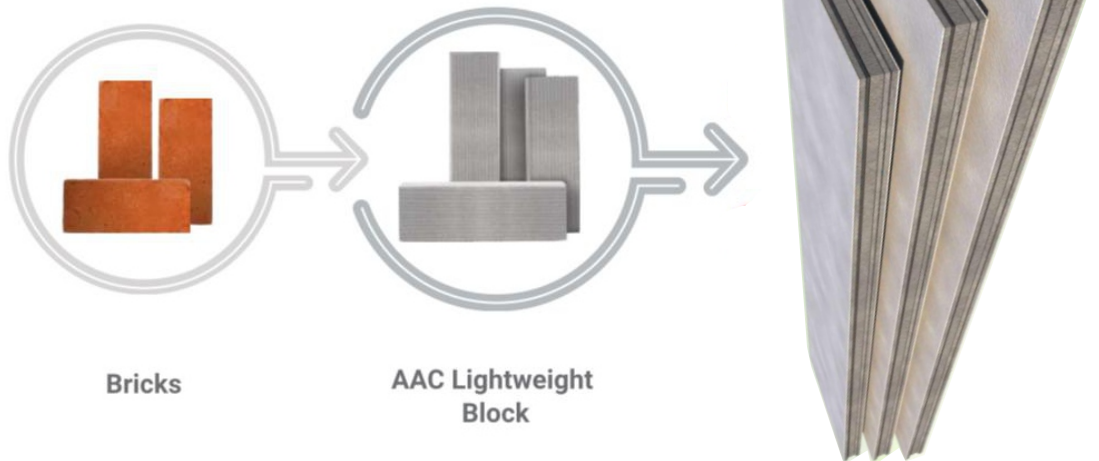

PRODUCT ADVANTAGES

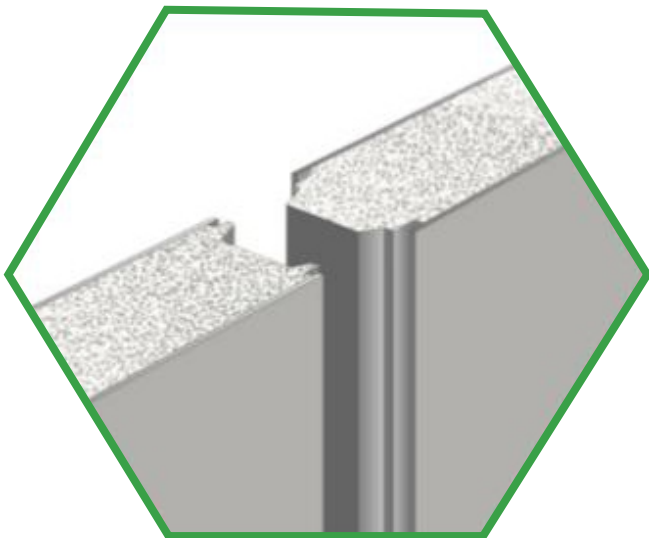

Increased Carpet Area:

Slim & sturdy walls take up less space



Faster Installation:

4x faster project completion than AAC Blocks



Low Finishing Cost:

Saves total cost by requiring less labour & time



Fire Resistant:

Is non-combustible & resistant for up to 4 hours



Thermal & Acoustic Insulation:

Excellent at noise reduction & slowing heat transfer



Eco-friendly:

Reduces the consumption of water during installation



Lightweight:

Yet gives superior strength

PRODUCT SPECIFICATIONS

Specifications	 Red Brick	 Drywall	 AAC Block	 ROCON PANEL
Dry Density (kg/m³)	1950	600-800	550-650	720-780
Working Density (kg/m³)	2000	NA	600-700	780
Wind Load (kg/m²)	Up to 150	Up to 160	Up to 160	Up to 120
Compressive Strength (N/mm²)	>3.5	>4	>4.2	>4
Water Absorption (By Volume)	<43%	<90%	<33%	<33%
Fire Resistance	1.5 hrs (100 mm)	1 hr (100 mm)	4 hrs (100 mm)	2 hrs (75 mm)
Thermal Conductivity (W/m.K)	0.81	0.25	0.16	0.21
STC Rating (dB)	50 (230 mm)	40 (100 mm)	38-43 (100 mm)	35 (100 mm)
Reinforced Steel Tensile Strength (N/mm²)	NA	NA	NA	NA
Weight (kg/m²)	185 (115 mm)	20	70 (100 mm)	54 (75 mm)

TECHNICAL SPECIFICATIONS

Properties	Unit	Thickness 75mm	Thickness 50 mm
Nominal Weight	Kg/m2	54.5	43.5
Apparent Density	Kg/m3	726	871
Multipoint Load 2.9m	Kg/cm2	220	192
Tensile Strength Parallel to surface	Kg/m2	4.6	3.4
Tensile Strength Perpendicular to surface	Kg/cm2	2.3	1.7
Modulus of Rapture	Kg/cm2	51.3	48.5
Axial Load	KN/m	117	103
Test Standards: IS 2380 (Part 2,8,3,6,5 & 4) - 1977			
Fire Rating	Minutes	120	
Test Standards: BS 476-20:1987- Part 20 BS 476-22:1987-Part 22			



AN ISO 9000-2015
CERTIFIED COMPANY

**Rajashri Concrete Products
Kolhapur, Maharashtra.**

☎ : 9069906912
