





1. HDMI TYPE-A SOURCE CONNECTOR

2. HDMI ESD / LOW-CAPACITANCE SHUNTS

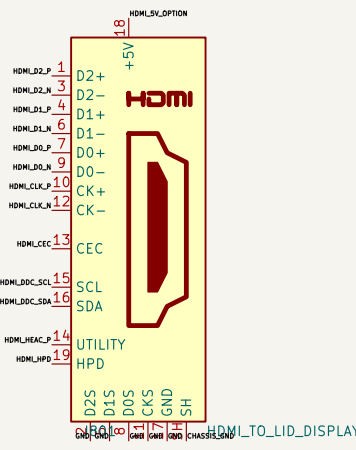

Capacitor CM5 00C 5.1 tolerance and their pull-up values against the Radxa carrier reference before taped rework.




HDMI_HDMI_0 connects to Row A, the selected monitor uses video/SCL/CEC/HPD only.

Start bench to check at the connector. TMSD return uses the local right ground plane.

Place an HDMI ESD shunt (resistor) behind (B2) with no close on TMSD pins.

3. USB TOUCH HOST PORT

4. 12 V / 2.5 A DISPLAY POWER

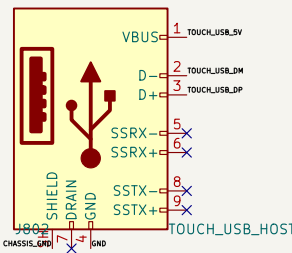

Only USB 2 is allocated from the CM5. A standard USB 2 A-to-B cable with carrier USB 2 touch data.

The monitor-side SuperSpeed Type-B receptacle is not illustrated as a device connector on this host carrier.

ESDPROT_12V single track: 2.5 A continuous / 30 W branch, covering the listed 25 W monitor.

No local display eFuse. Use the upstream B25_12V branch fuse and ESDS board 10 mA5 harness.

5. HINGE-EDGE HARNESS BUILD

Radxa CM5 HDMI USB touch, HSDC 12 to 1200 +/- 25 mm each, with separate related hinge and service loops.

Assemblies: full 60 board plus 600 mm panel 100 / 10 degree 600 to connector bracket at hinge-free bank.

Carrier connectors face down. Show: three related loop chain of four, PSD option, board loopback and sharp edges.

