





1. HDMI TYPE-A SOURCE CONNECTOR

2. HDMI ESD / LOW-CAPACITANCE SHUNTS

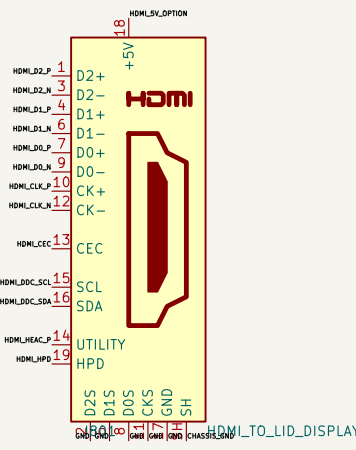

Capacitor CM5 200 5 1 tolerance and their pull-up values against the Radxa carrier reference before taped reflow.





HDMI_HDMI_8 connects to Row A, the attached monitor uses video/DVI/CEC/HPD only.

Start bench to check at the connector. TMSD return uses the local right ground plane.

Place an HDMI ESD shunt (resistor) behind (B2) with no close to TMSD pins.

3. USB TOUCH HOST PORT

4. 12 V / 2.5 A DISPLAY POWER



Only USB 2 is allocated from the CM5. A standard USB 3 A-to-B cable with carrier USB 2 touch data.

The monitor-side SuperSpeed Type-B receptacle is not illustrated as a device connector on this host carrier.

ESDPROT_12V single track: 2.5 A continuous / 30 W branch, covering the listed 25 W monitor.

No local display eFuses. Use the upstream B25_12V branch fuse and RESET board 10 AHS harness.

5. HINGE-EDGE HARNESS BUILD

Radxa HDMI-H23A USB touch, H23C 12 to 1300 +/- 25 mm each, with separate related hinge and service loops.

Assemblies: full 90 degree plus 900 mm panel 90 / 45 degree 90 to connector flexion at hinge-free bend.

Carrier connectors face down. Show: three related loop area of face, PES offset, board thickness and sharp edges.

