






1. LOCKED CARRIER HARNESS

2. TERMINATED LVDS RECEIVERS

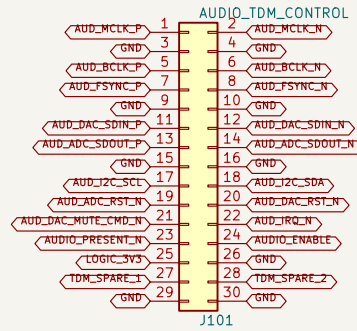

100 ohm differential termination


100 ohm differential termination

100 ohm differential termination


100 ohm differential termination

3. ADC RETURN LVDS DRIVER

4. CONTROL DEFAULTS AND POWER STATE



5. HARDWARE FAIL-SILENT GATE

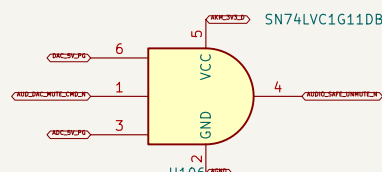

100 ohm differential; interleaved returns; no branch stubs
87832-6425 pin assignment is locked and matches CM5-CARRIER J901
One LVDS driver returns the ADC-TDM data stream to the CMS carrier.
Four terminated LVDS receivers carry MCLK, BCLK, FSYNC, and DAC-TDM data
ProComm
Sheet: 7
File: Audio-TDM-Clock.kicad_sch
Title: ProComm AUDIO-BX8 - TDM, Clock, and Control Interface
Size: A1
Kicad E.D.A. 10.0.5-rc1
Date: 2026-08-16
Rev: A1
1 of 1