

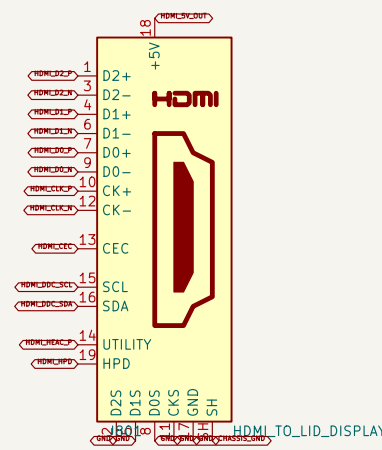



1. HDMI TYPE-A SOURCE CONNECTOR





2. HDMI ESD / LOW-CAPACITANCE SHUNTS



HD91 DDC connects directly to the CMS 5 V DDC pins, matching Radxa CMS I2C V2.2; do not add duplicate carrier pull-ups.




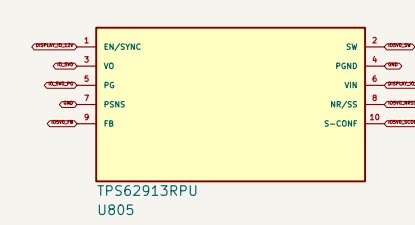


3. DEDICATED 10_5V0 / 2 A BUCK



IQ_SIV feeds DHS US-8 jls 106, HDX source 5 F and USB-fault 1825; no monitor-power affix.

4. USB TOUCH HOST PORT



5. 12 V / 2.5 A DISPLAY POWER



6. HINGE-EDGE HARNESS BUILD

H03A H04M, H03B USB touch, H03C 12 V: 1000 $\pm$ 25 mm each, with separate retained hinge and service loops

Acceptance: Full 180 travel plus 300 mm panel lift / 45 degree tilt; no connector tension or hinge-free beam

Carrier connectors face down. Store released loops clear of fans, PSU airflow, board jumpouts and sharp edges.



No display fuse; separate fuses DISPLAY_12V and DISPLAY_0.12V branches feed this shoe
 USB-A is the CMS hot end; cable terminates in USB-B SuperSpeed at the monitor
 Carrier connectors face downward at the hinge-edge harness notch
 15.6-inch lid monitor: HDMI video, USB 2 touch, 12 V / 2.5 A
ProComm
 Sheet: /
 File: Display-Harness.kicad_sch
Title: Radxa CM5 ProComm Carrier - Lid Display Harness

Size: A1	Date: 2026-08-14	Rev: A1
KiCad E.D.A. 10.0.5-rc1		Id: 1/1