


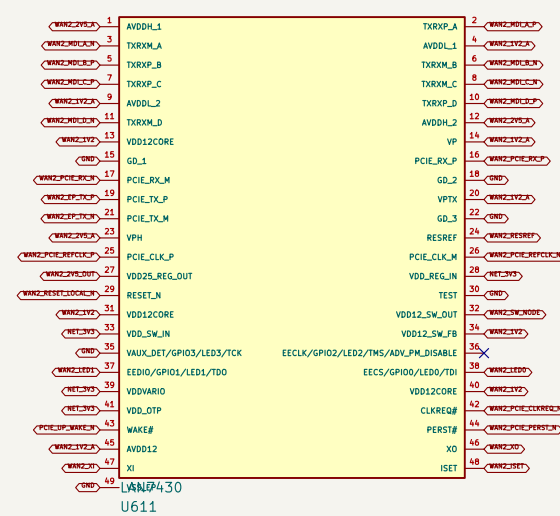






LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.



LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.

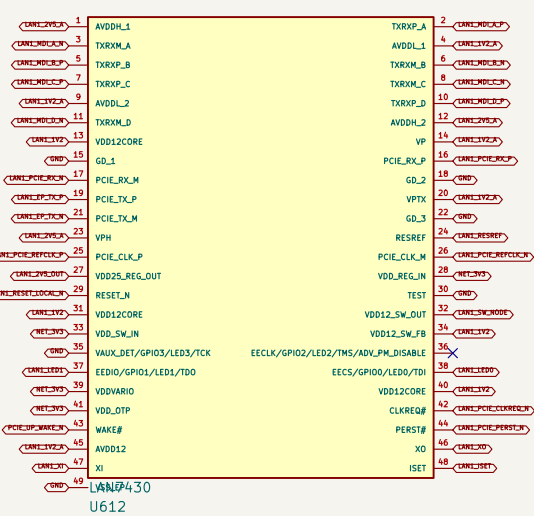

LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.

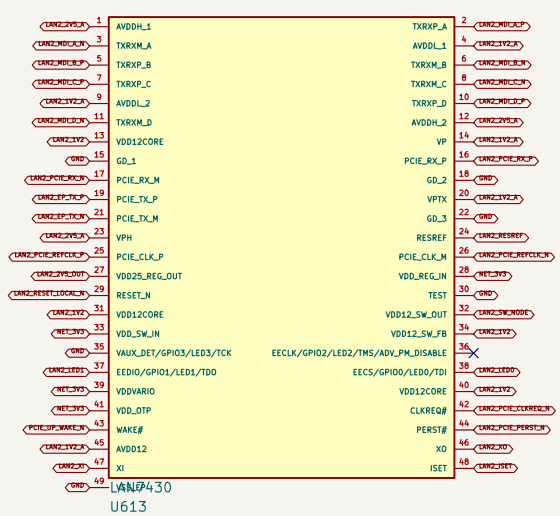


LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.


LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.



LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.




LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.



LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.




LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.





LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.




LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.

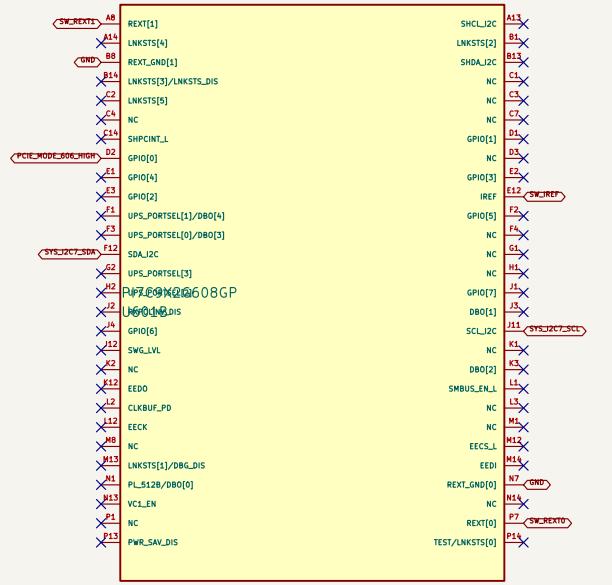


LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.

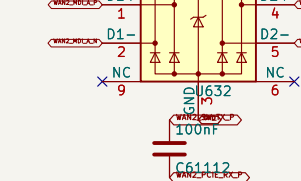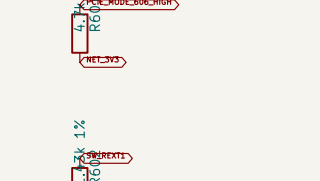


LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.

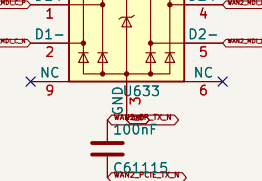


LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.

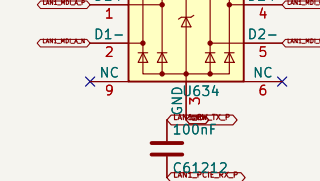


LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.

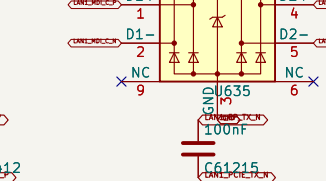

LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.

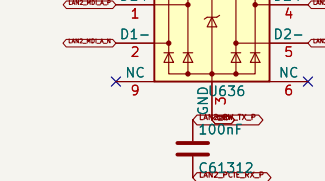

LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.

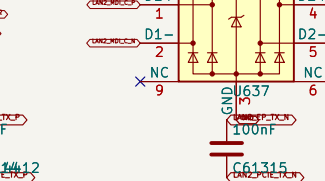


LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.


3. WI-FI AP MINI PCIE 474R

Switch port 5 is disabled and unconnected to avoid PCIe Gen2 slots and an unstable, test-ready.


QPN0101 = 01 selects 606 mode. QPN0101 uses the internal pull-down. QPN0101 is pulled high.

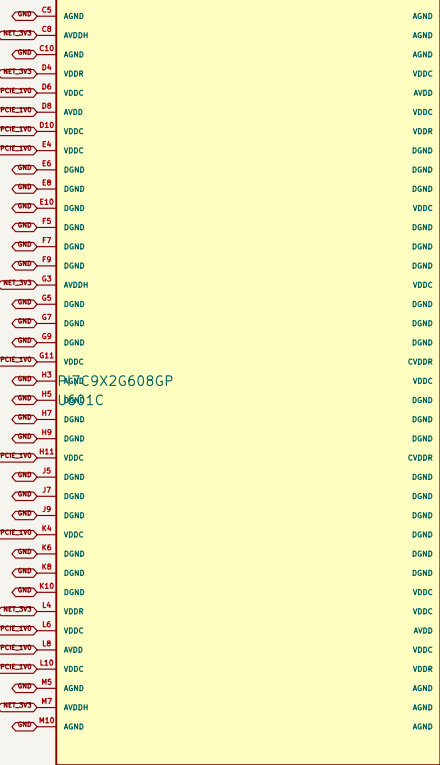

HARDWARE-QUALIFIED UPSTREAM RESET

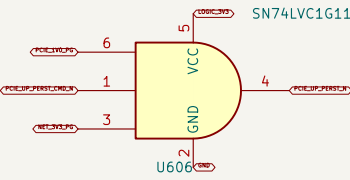

10kV reset signal uses 10k of per supply. 10kV reset signal is 10kV and 10kV.



LAN7A30 pin 10 has no electrical signal. Pin 10 is shown on the internal pin sheet as unconnected. Pin 10 is shown as unconnected.

