

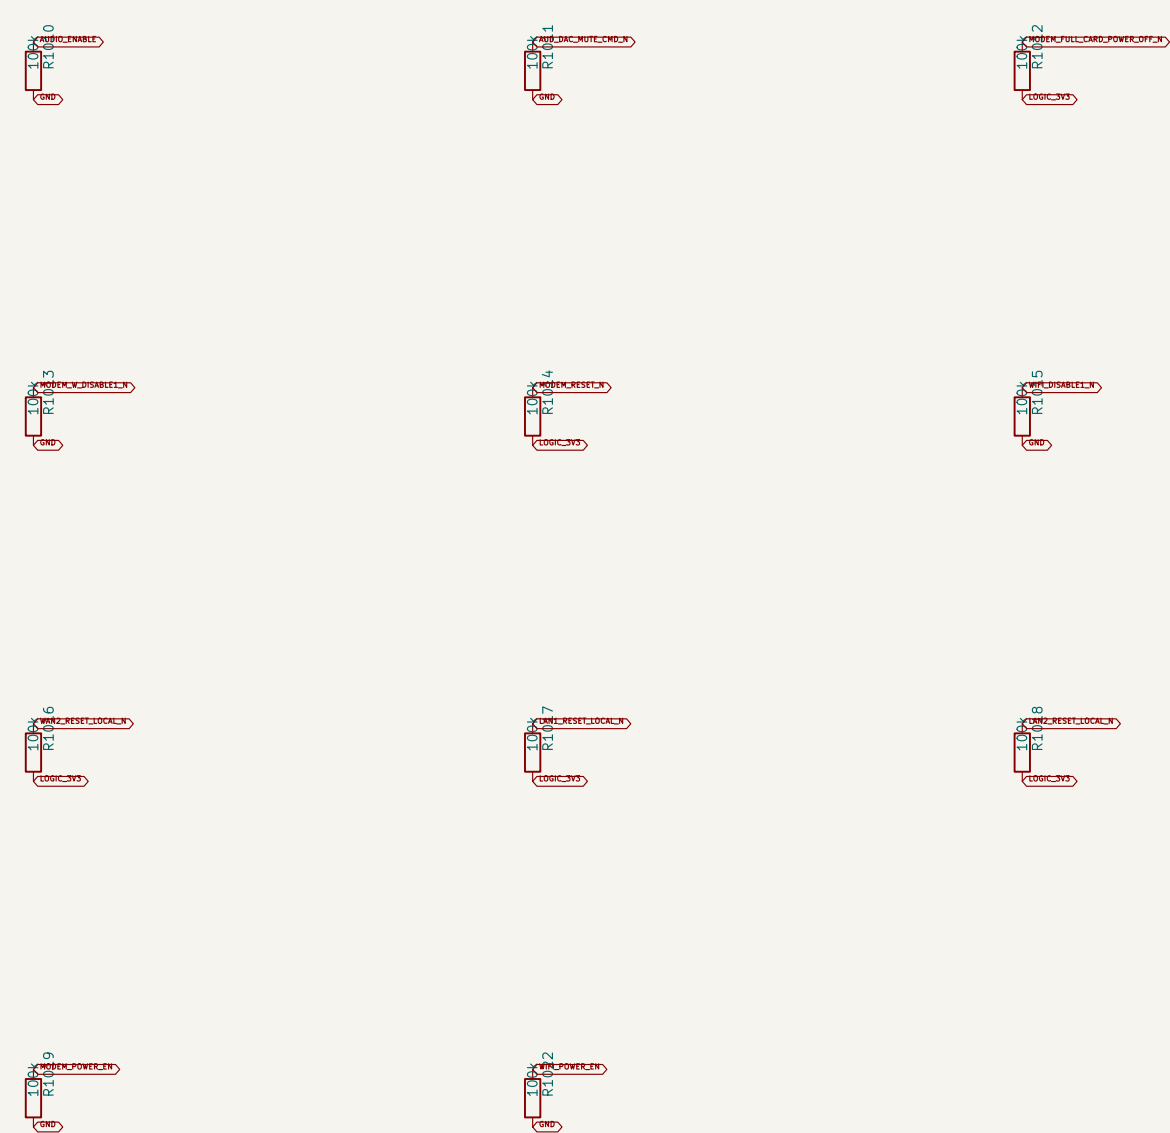
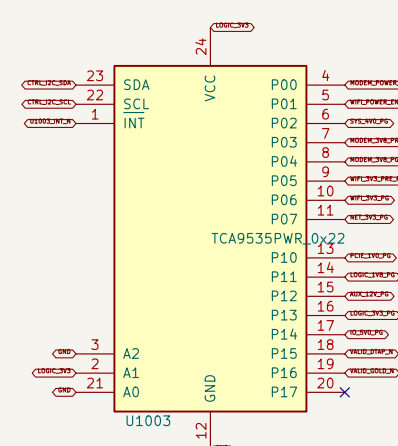
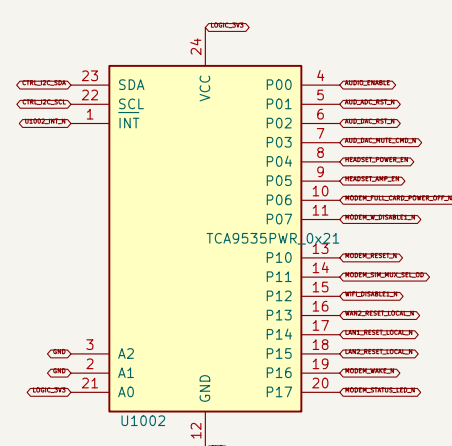
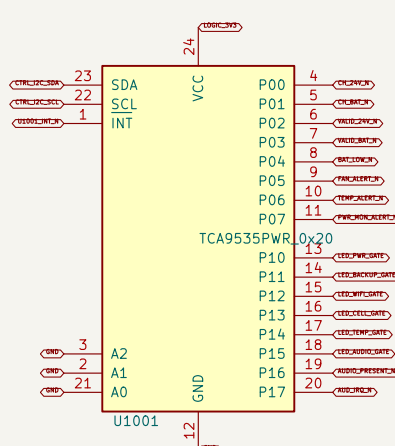

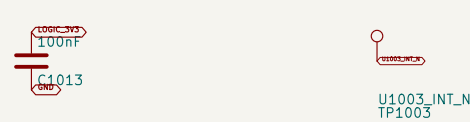


### 1. 1.8 V TO 3.3 V SYSTEM I2C CONTROL BUS







## 2. THREE 16-BIT GPIO EXPANDERS

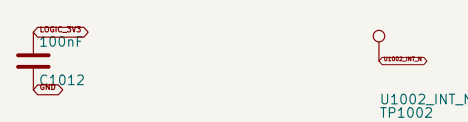

The control branch is isolated to its own PDB350, which still has compatibility with the separate 3000-800 branch present.

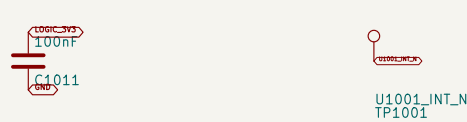

### 3. EMC2305 FOUR-FAN CONTROL WITH FAILSAFE

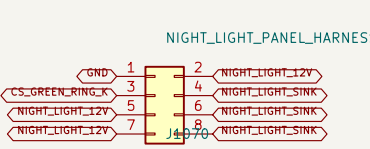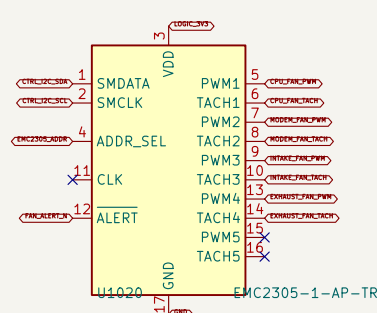






add0,00, 4, %to 3.3 V across 7-ohm DMMs address 0x0E; Internal clock is used

Exclusion diameter: 26.30 mm base / divider 26 = 1.304 mm PPM direct duty size test monitoring, 200K start and 300 maximum running duty

Fun 1 is panel intake and fun 2 is panel exhaust. CPU and modem fans circulate locally beneath their dedicated mesh/foampad an

All four PAKs only pull high when 0L300 is absent or unpowered, commanding the selected 4-trace item to full span.

#### 4. THREE HIGH-ACCURACY TEMPERATURE SENSORS

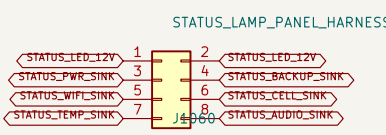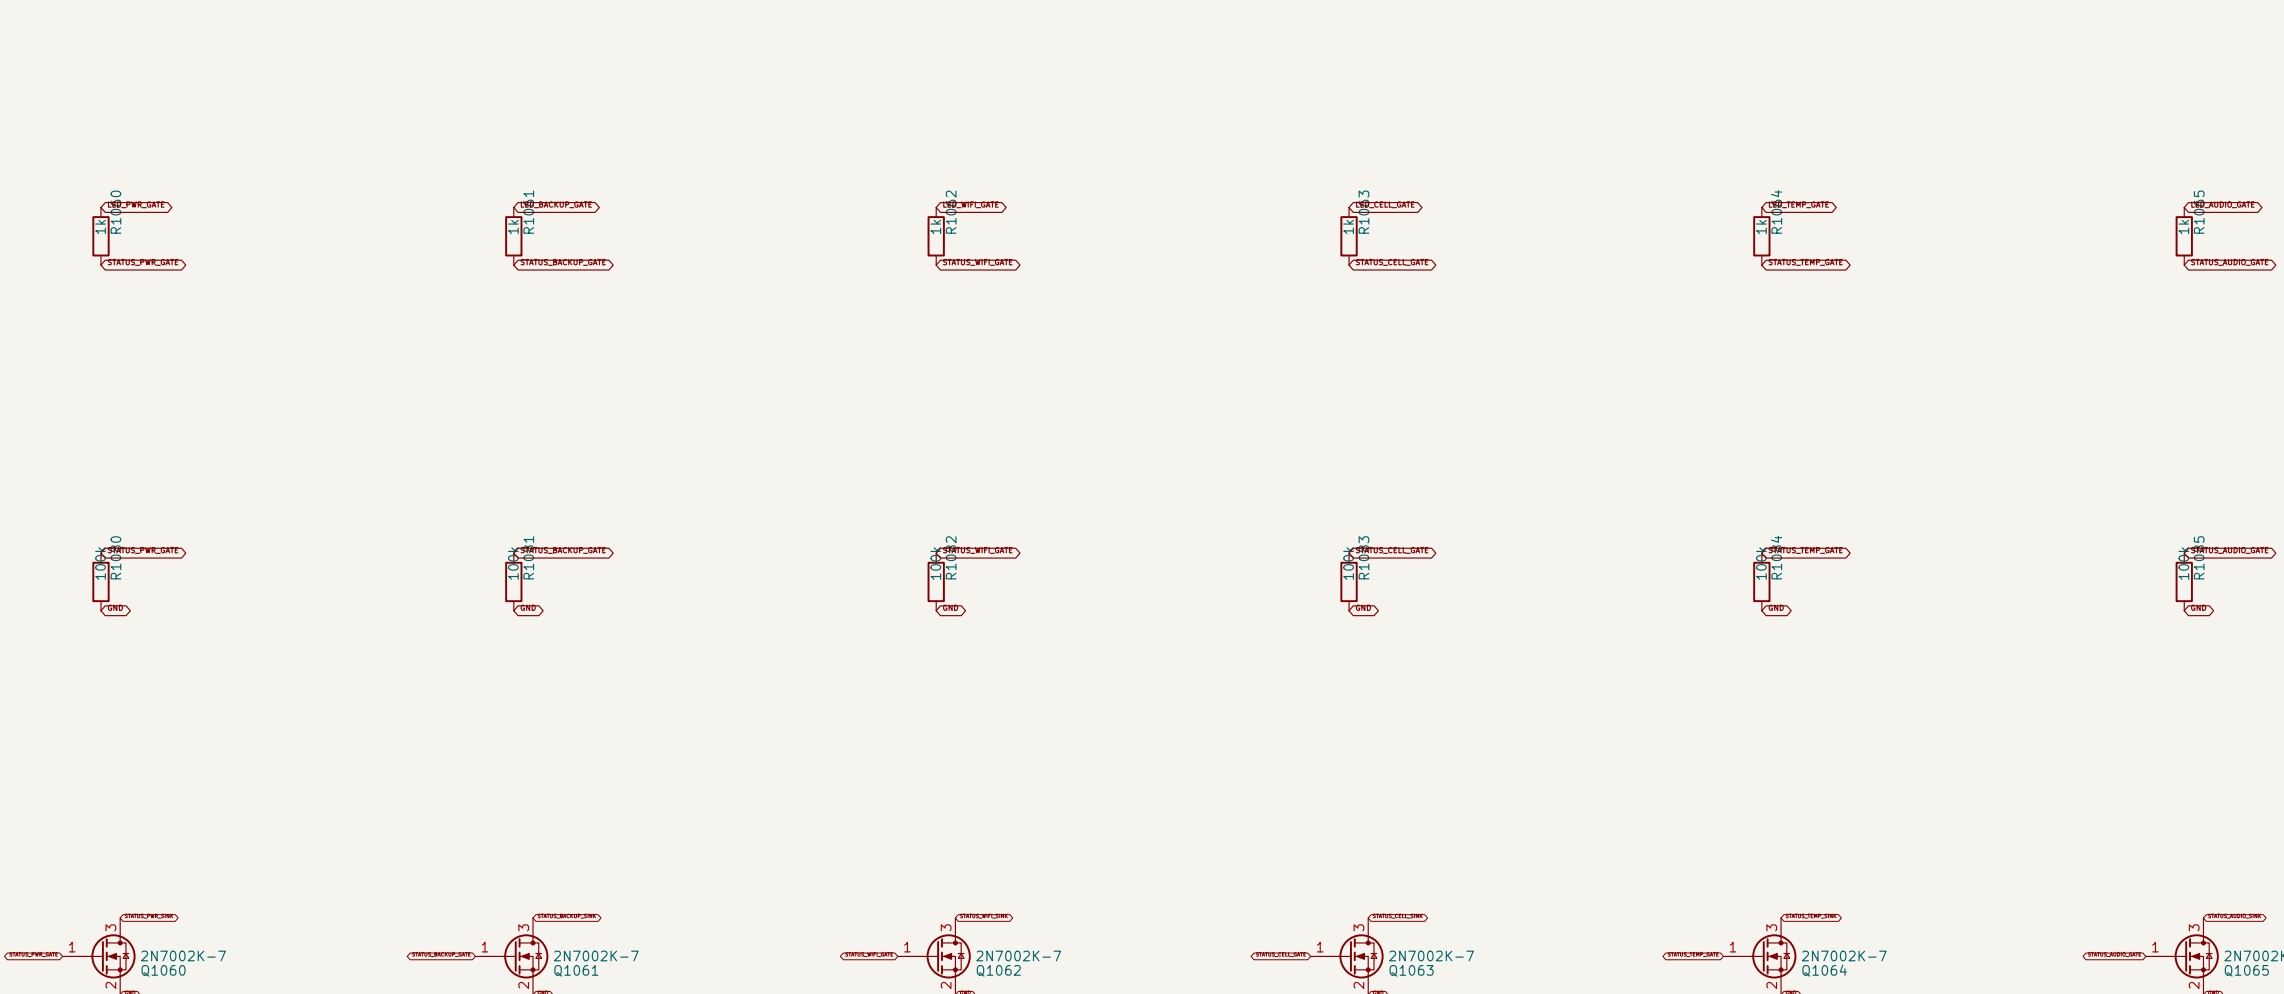

Insert text again: add 200% alpha where TDP<0.11110, formulae made fully/fully/field to identify the users

TCAP955 devices are capable of D20/Dx12/Dx22 capture status and drive safe control signals. The T1P17 series modules (CM5, CM5n and board/power zones) at 5xW6/0x19/0x4A PWM pull-ups provide full-speed hardware fallback if the controller or firmware fail. EMI/ESD controls (CPU, memory, intake, and exhaust fans) independently.

**ProComm**

Sheet: /  
File: Thermal-10.kicad\_sch

**Title: Radxa CM5 ProComm Carrier – Thermal and GPIO Control**

|                         |                  |         |
|-------------------------|------------------|---------|
| Size: A0                | Date: 2026-08-14 | Rev: A1 |
| KiCad E.S.A. 10.0.5-rc1 |                  | Id: 1/1 |