

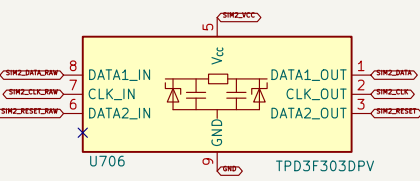
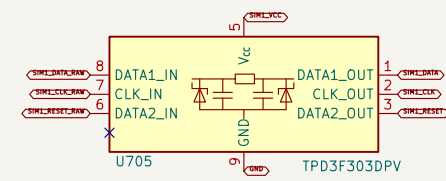

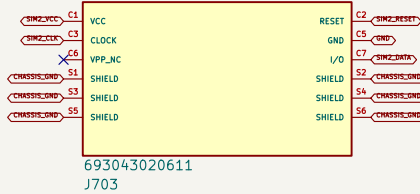
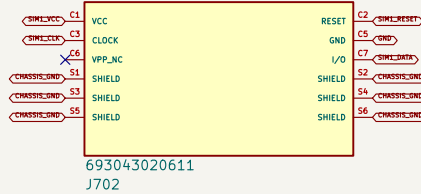

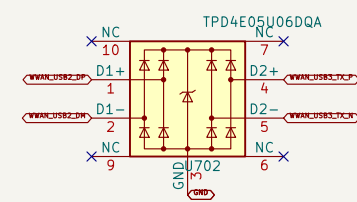


1. UNIVERSAL M.2 B-KEY WWAN SOCKET


2. USB ESD AND MODEM BULK CAPACITANCE

3. FSA2567 DUAL-SIM MUX

4. TWO FIELD-ACCESSIBLE NANO-SIM HOLDERS

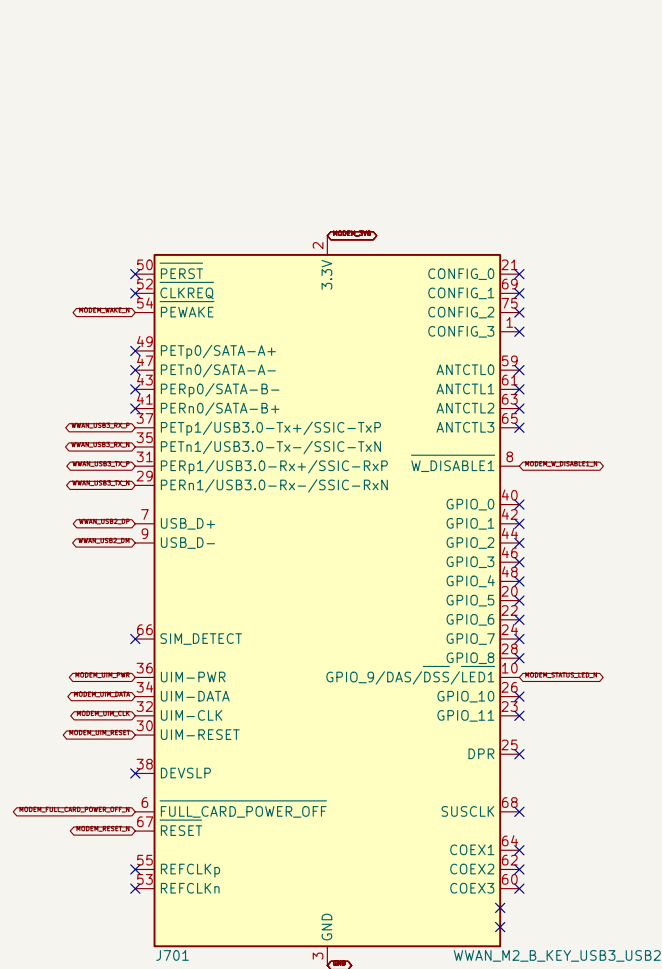

6. MODEM CONTROL CONTRACT

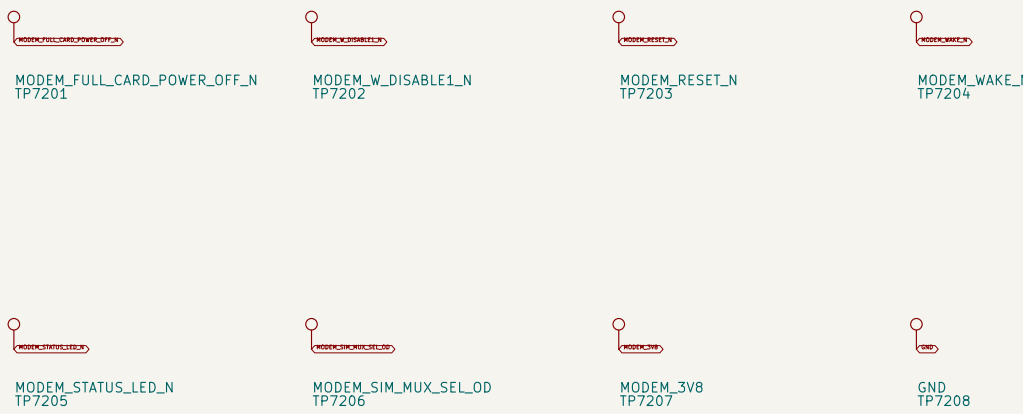

Four off-board ECF 818033349 (255.89 IN-ta-\$M) bulkhead digitalis; final cable length remains a routed sample of

Control outputs originate at the system GPIO expander. FULL_CARD_POWER_OFF and RESET require final modem-specific timing validation.

TP7201-TP7208 are copper factory probes, USB 2/3 has no branch or generic test header

RF coax leaves the module directly for four right-side bulkhead antennas
FSA2567 defaults to physical SIM 1; open-drain low selects physical SIM 2
Dedicated 3.8 V / 6 A rail; verify selected modem peak-current waveform
M.2 B-key modem socket supports USB 3.0 and USB 2.0 fallback

ProComm
Sheet: /

Title: Radxa CM5 ProComm Carrier – WWAN and Dual SIM

Size: A1	Date: 2026-08-14	Re
KiCad E.D.A. 10.0.5-rc1		Id: