






1. LOCKED CARRIER HARNESS

2. TERMINATED LVDS RECEIVERS

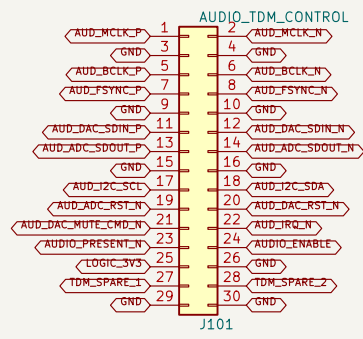




MCLE: integrated I/O elem. terminals

ECLE: Integrated I/O elem. termination

PS100C; Integrated 100 ohm termination

IAC_500K: Integrated 110 ohm termination

3. ADC RETURN LVDS DRIVER

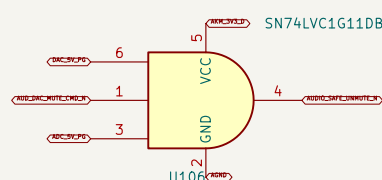

100 ohm differential; interleaved returns; no branch stubs
87832-6423 pin assignment is locked and matches CM5-CARRIER J901
One LVDS driver returns the ADC TDM data stream to the CM5 carrier
Four terminated LVDS receivers carry MCLK, BCLK, FSYNCR, and DAC TDM data

ProComm
Sheet: /TDM / Clock / Control/
File: Audio-TDM-Clock.kicad_sch

Title: ProComm AUDIO-8X8 – TDM, Clock, and Control Interface

1. AK5558VN EXACT PIN CAPTURE


2. MODE STRAPS

Accession	Protein	Gene	Accession	Protein	Gene
AF001111	AF001111.1	AF001111	AF001111	AF001111.1	AF001111
AF001112	AF001112.1	AF001112	AF001112	AF001112.1	AF001112
AF001113	AF001113.1	AF001113	AF001113	AF001113.1	AF001113
AF001114	AF001114.1	AF001114	AF001114	AF001114.1	AF001114
AF001115	AF001115.1	AF001115	AF001115	AF001115.1	AF001115
AF001116	AF001116.1	AF001116	AF001116	AF001116.1	AF001116
AF001117	AF001117.1	AF001117	AF001117	AF001117.1	AF001117
AF001118	AF001118.1	AF001118	AF001118	AF001118.1	AF001118
AF001119	AF001119.1	AF001119	AF001119	AF001119.1	AF001119
AF001120	AF001120.1	AF001120	AF001120	AF001120.1	AF001120
AF001121	AF001121.1	AF001121	AF001121	AF001121.1	AF001121
AF001122	AF001122.1	AF001122	AF001122	AF001122.1	AF001122
AF001123	AF001123.1	AF001123	AF001123	AF001123.1	AF001123
AF001124	AF001124.1	AF001124	AF001124	AF001124.1	AF001124
AF001125	AF001125.1	AF001125	AF001125	AF001125.1	AF001125
AF001126	AF001126.1	AF001126	AF001126	AF001126.1	AF001126
AF001127	AF001127.1	AF001127	AF001127	AF001127.1	AF001127
AF001128	AF001128.1	AF001128	AF001128	AF001128.1	AF001128
AF001129	AF001129.1	AF001129	AF001129	AF001129.1	AF001129
AF001130	AF001130.1	AF001130	AF001130	AF001130.1	AF001130
AF001131	AF001131.1	AF001131	AF001131	AF001131.1	AF001131
AF001132	AF001132.1	AF001132	AF001132	AF001132.1	AF001132
AF001133	AF001133.1	AF001133	AF001133	AF001133.1	AF001133
AF001134	AF001134.1	AF001134	AF001134	AF001134.1	AF001134
AF001135	AF001135.1	AF001135	AF001135	AF001135.1	AF001135
AF001136	AF001136.1	AF001136	AF001136	AF001136.1	AF001136
AF001137	AF001137.1	AF001137	AF001137	AF001137.1	AF001137
AF001138	AF001138.1	AF001138	AF001138	AF001138.1	AF001138
AF001139	AF001139.1	AF001139	AF001139	AF001139.1	AF001139
AF001140	AF001140.1	AF001140	AF001140	AF001140.1	AF001140
AF001141	AF001141.1	AF001141	AF001141	AF001141.1	AF001141
AF001142	AF001142.1	AF001142	AF001142	AF001142.1	AF001142
AF001143	AF001143.1	AF001143	AF001143	AF001143.1	AF001143
AF001144	AF001144.1	AF001144	AF001144	AF001144.1	AF001144
AF001145	AF001145.1	AF001145	AF001145	AF001145.1	AF001145
AF001146	AF001146.1	AF001146	AF001146	AF001146.1	AF001146
AF001147	AF001147.1	AF001147	AF001147	AF001147.1	AF001147
AF001148	AF001148.1	AF001148	AF001148	AF001148.1	AF001148
AF001149	AF001149.1	AF001149	AF001149	AF001149.1	AF001149
AF001150	AF001150.1	AF001150	AF001150	AF001150.1	AF001150
AF001151	AF001151.1	AF001151	AF001151	AF001151.1	AF001151
AF001152	AF001152.1	AF001152	AF001152	AF001152.1	AF001152
AF001153	AF001153.1	AF001153	AF001153	AF001153.1	AF001153
AF001154	AF001154.1	AF001154	AF001154	AF001154.1	AF001154
AF001155	AF001155.1	AF001155	AF001155	AF001155.1	AF001155
AF001156	AF001				

AK5558VN
U201

3. REFERENCES AND LOCAL BYPASS

Stamps establish the safe hardware default; firmware still writes and verifies the serial-control registers after reset.



YRIF pair 1

VOLF page 2

YÖİS par 3

VGLF pair 4




QFN exposed-pad geometry and assembly coupon remain a routing release gate
Each VREFH uses 20 ohm plus 100 nF and 100 uF to its VREFL/AGND
AVDD=5.0 V, TVDD=3.3 V, internal 1.8 V LDO enabled
TDM256, 32-bit I2S, slave mode: TDM1:0=10, DIF1:0=11, MSN=0

ProComm
Sheet: /AK5558VN ADC/

Title: ProComm AUDIO-8X8 - AK5558VN Eight-Channel ADC

1. AK4458VN EXACT PIN CAPTURE

2. SERIAL-CONTROL DEFAULTS

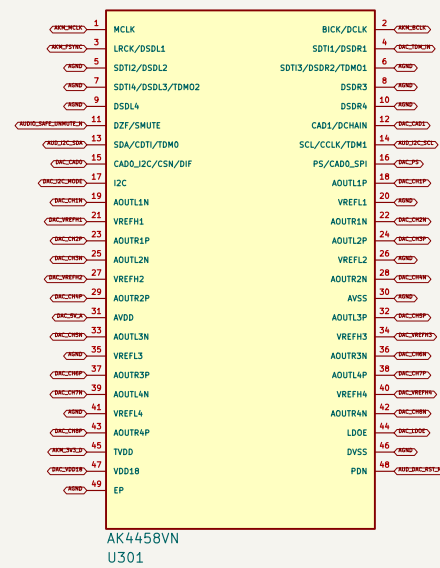


CR01:B+01 selects DAC address 0x11; AOC remains at 0x10. TIM256 and 32-bit IQ5 are written only while route is asserted.

The unused S0TQ/3y4 and OSD pins are tied low in PCM 32K mode to prevent floating inputs.

3. REFERENCES AND LOCAL BYPASS

Every ILK glibc and shell binds to `LD_PROFILE` at the command. `LDNO` and `LDNO` check only at the controlled load-entry point.

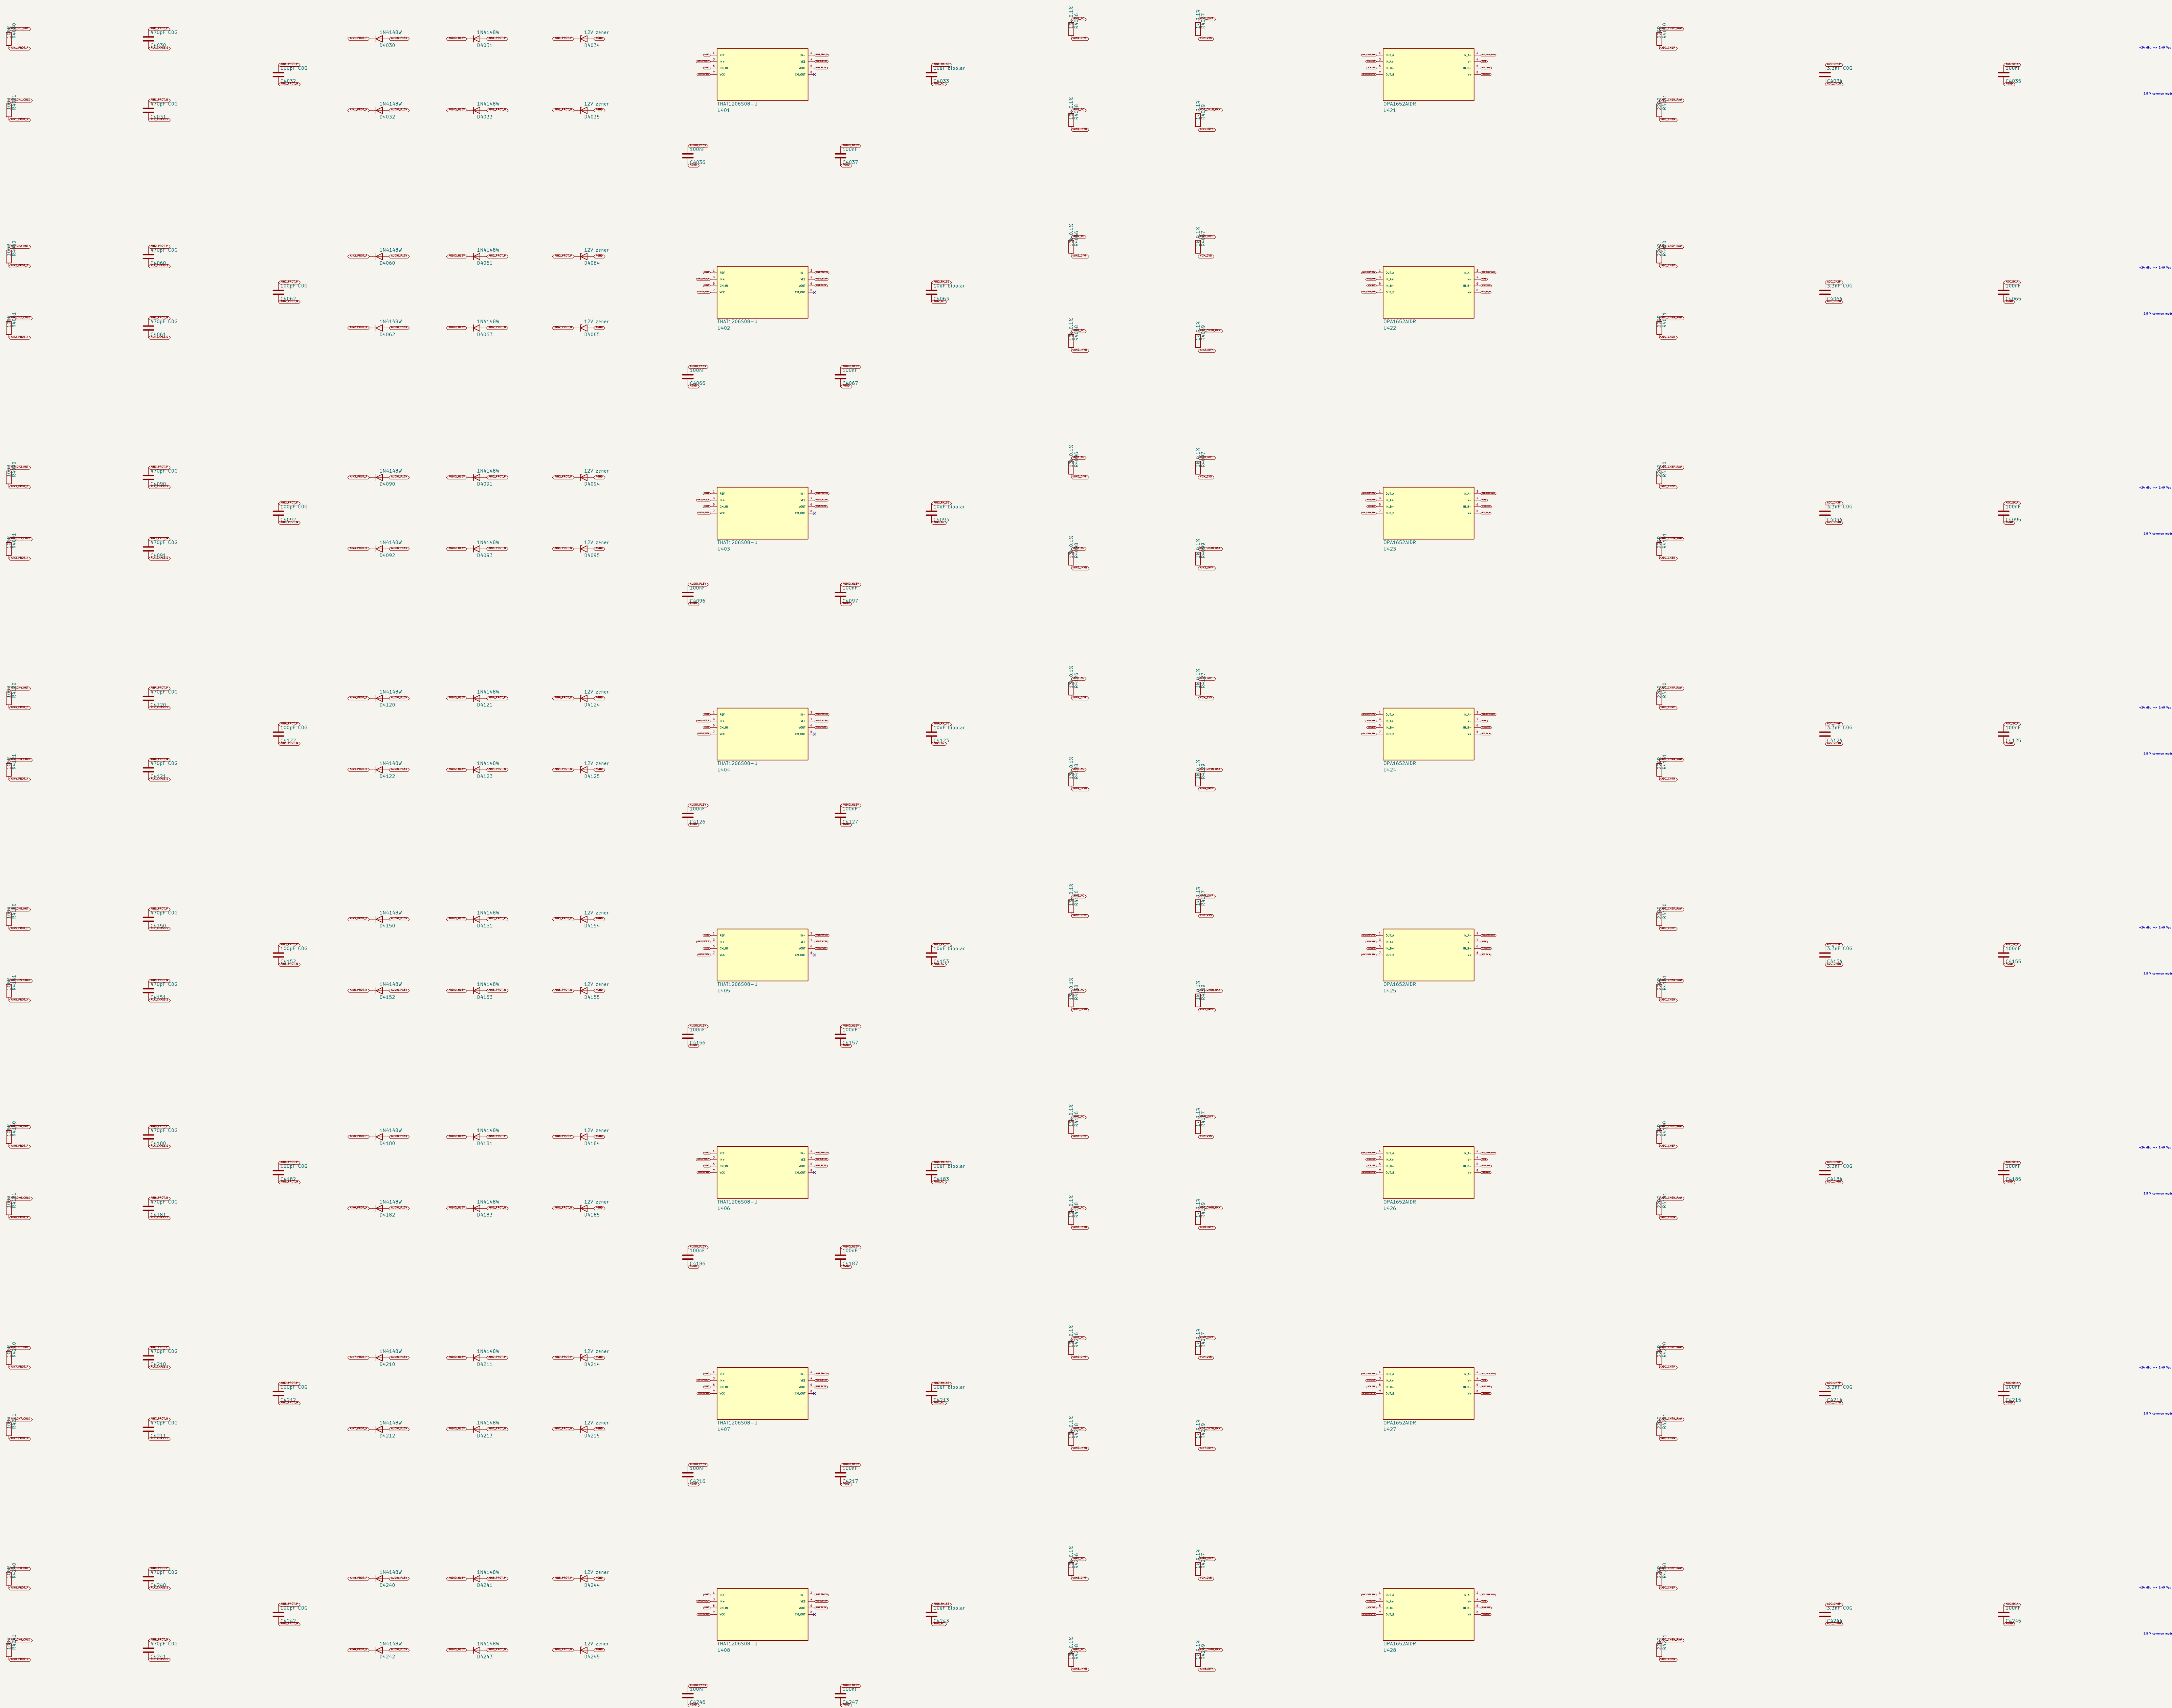

1. AUDIO_12V ENTRY AND SINGLE GROUND STAR

3. QUIET 5.5 V PRE-RAIL

2. ISOLATED BIPOLAR LINE-STAGE RAILS






4. SEPARATE ADC AND DAC 5 V LT3045 RAILS

5. AKM DIGITAL RAIL AND 2.5 V INPUT COMMON MODE

6. ERC SOURCES AND SEQUENCING CONTRACT

1. LOCKED CARRIER HARNESS

2. TERMINATED LVDS RECEIVERS

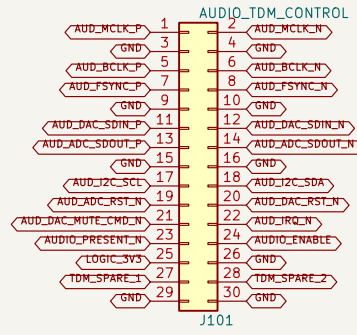

100 ohm termination


100 ohm termination

100 ohm termination


100 ohm termination

3. ADC RETURN LVDS DRIVER

4. CONTROL DEFAULTS AND POWER STATE



5. HARDWARE FAIL-SILENT GATE

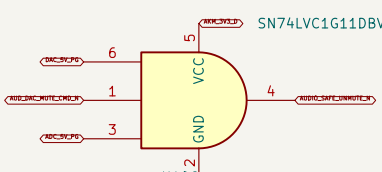

100 ohm differential; interleaved returns; no branch stubs
87832-6425 pin assignment is locked and matches CMS-CARRIER J901
One LVDS driver returns the ADC TDM data stream to the CMS carrier.
Four terminated LVDS receivers carry MCLK, BCLK, FSYNC, and DAC TDM data

ProComm
Sheet: 7
File: Audio-TDM-Clock.kicad_sch
Title: ProComm AUDIO-BX8 - TDM, Clock, and Control Interface
Size: A1
Kicad E.D.A. 10.0.5-rc1
Date: 2026-08-16
Rev: A1
1/1

1. AK5558VN EXACT PIN CAPTURE

2. MODE STRAPS

[illegible]


AK5558VN
U201

3. REFERENCES AND LOCAL BYPASS

Steps establish the safe hardware default; firmware still writes and verifies the serial-control registers after reset

1. AK4458VN EXACT PIN CAPTURE


2. SERIAL-CONTROL DEFAULTS

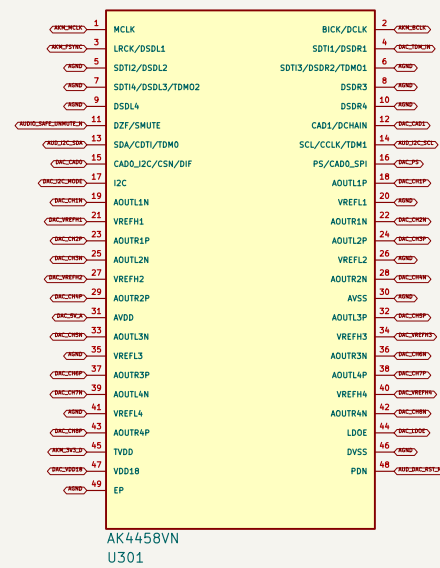

CR01:B+01 selects DAC address 0x11; AOC remains at 0x10. TIM256 and 32-bit IQ5 are written only while route is asserted.

The unused S0TQ/3/4 and OSD pins are tied low in PCM TDM mode to prevent floating inputs.

3. REFERENCES AND LOCAL BYPASS

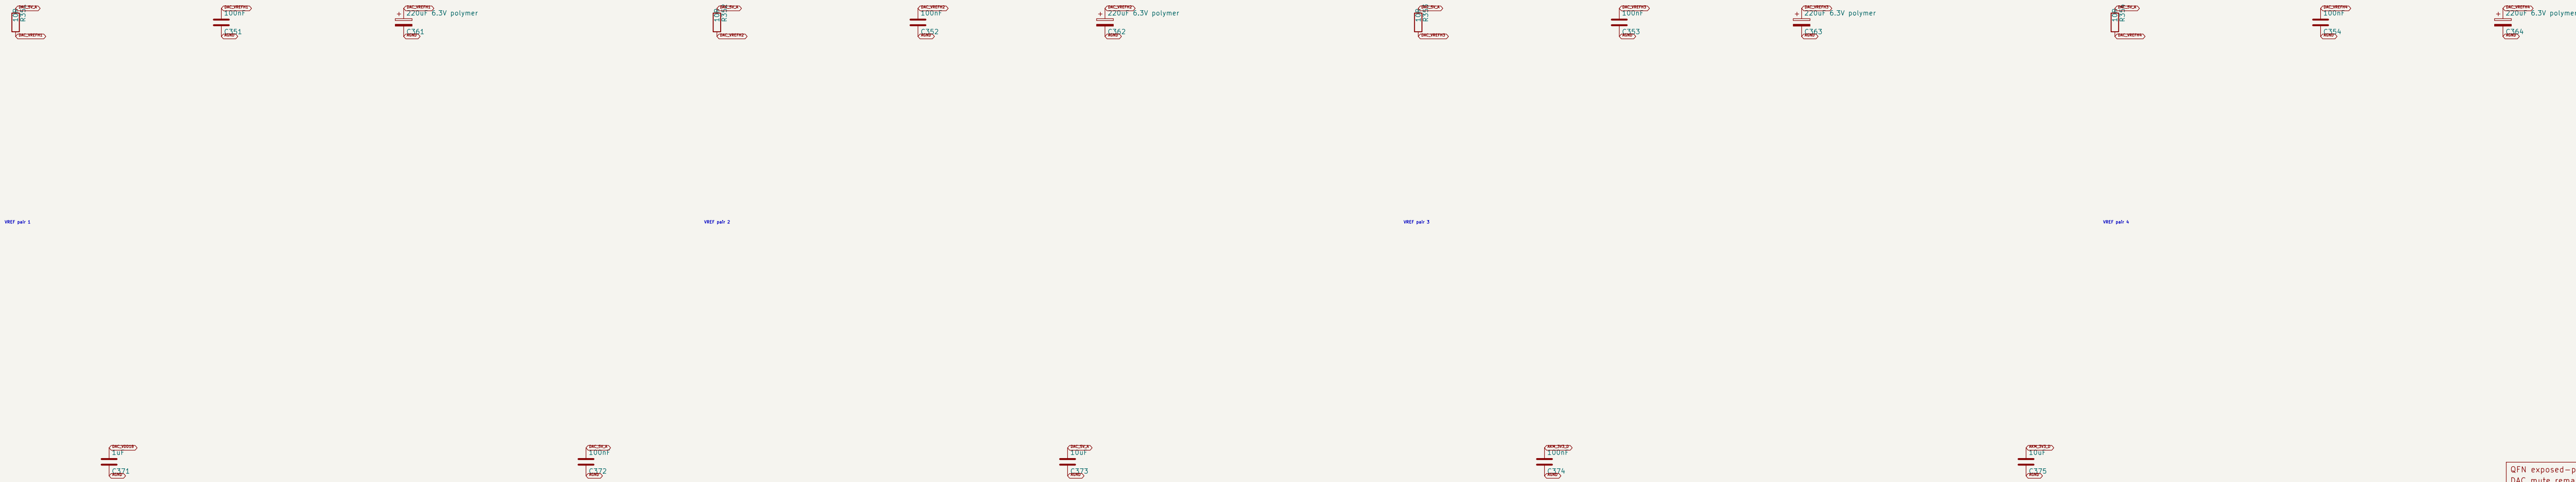

[illegible][illegible][illegible][illegible][illegible]

1. AUDIO_12V ENTRY AND SINGLE GROUND STAR

3. QUIET 5.5 V PRE-RAIL

2. ISOLATED BIPOLAR LINE-STAGE RAILS

4. SEPARATE ADC AND DAC 5 V LT3045 RAILS

5. AKM DIGITAL RAIL AND 2.5 V INPUT COMMON MODE

6. ERC SOURCES AND SEQUENCING CONTRACT