





1. HDMI TYPE-A SOURCE CONNECTOR

2. HDMI ESD / LOW-CAPACITANCE SHUNTS

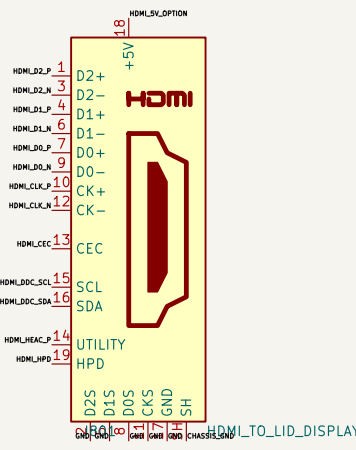

Capacitor CM5 000 5.1 nF tolerance and their pull-up values against the Radxa carrier reference before taped reflow.




HDMI_HDMI_0 connects to Row A, the selected monitor uses video/SDI/CEC/HPD only.

Start bench to check at the connector. TMSD return uses the local right ground plane.

Place an HDMI ESD shunt (resistor) behind (B1) with no close to TMSD pins.

3. USB TOUCH HOST PORT

4. 12 V / 2.5 A DISPLAY POWER

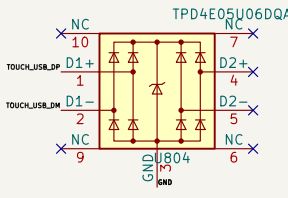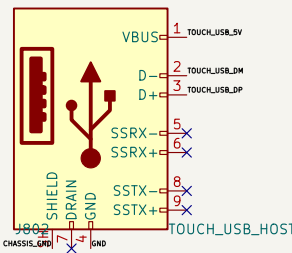

Buy USB 2 is allocated from the CM5, a standard USB 2 A-to-B cable with carrier USB 2 touch data.

The monitor-side SuperSpeed Type-B receptacle is not illustrated as a device connector on this host carrier.

DISPLAY_12V single track 2.5 A continuous / 30 W branch, covering the listed 25 W monitor.

No local display eFUSE. Use the upstream ATX_12V branch fuse and a 100 nF 10 uVd bypass.

5. HINGE-EDGE HARNESS BUILD

Bundle HDMI, USB A-to-B, and 12 V conductors through the centered hinge-edge notch with a common attraction sleeve.

Position a service loop for full lid travel, cradle the bundle on both sides, and keep bend radius outside the hinge pinch line.

All hinge carrier connectors are underside-facing and remain below the top panel; they do not add panel volume.

