

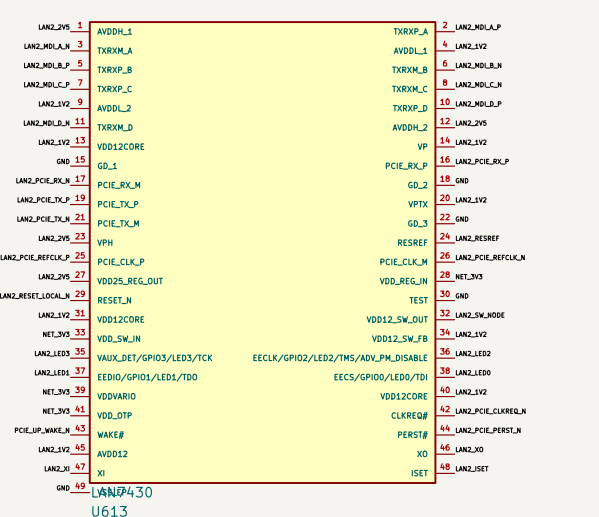




```
xxx) 7000(((114)2) village=mode 1, 0;); delete direct to channel, P00-side window (E
```

USDA's exact PCIe lanes, reset and distributed reference clock





VAR: 7109111W2 voltage-mode 5 Gb/s vicinals direct to class's, PFI-side residual 1

```
LAB: 7499([144]2 voltage-mode 5 Co); switch about to class's, PFI-side residual E
```


U02: 79P0114412 voltage-mode 1 Gb/s shifter direct to channel, PIV=rate reduced 0

3. WI-FI AP MINI PCIE 4T4R + SPARE PORT

GP90[1:0] = 01 selects 606 mode. GP901 uses its internal pulldown; GP900 is pulled high.

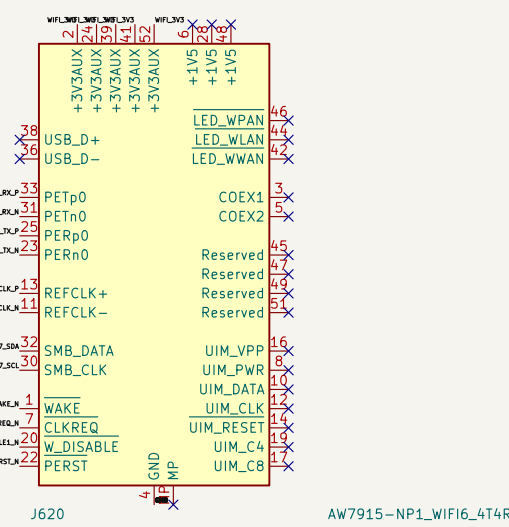

Part 5 is a controlled factory/test option; do not fill a cable header in production by default.

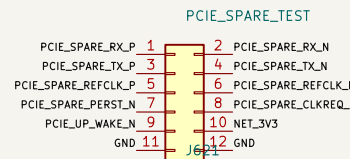

AK7915=NP1: true W1-F1 6-NTVR 80ml PCIe AP, 3.3 V / 4 A rail, four RF ports/bn

J629 Molex 6679106002 selected: Import and verify its manufacturer land pattern before PCB release



PWR_FLAG symbols declare off-sheet regulator outputs for ERC; they are not physical parts.

Package breakout pins are passive for cross-sheet ERC; net ownership defines direction
Exact package balls/pins from Diodes DS40210 Rev 8 and Microchip DS00002631G
Native WAN1 plus three LAN7430 endpoints use exact Wurth 74991114412 MagJacks
P17C9X2G608GP in 606 mode: x1 upstream plus five x1 downstream ports

Sheet: /

File: Network-PCIe.kicad_sch

Size: A1	Date: 2026-08-14	Rev: A1
KiCad E.D.A. 10.0.5-rc1		Id: 1/1