

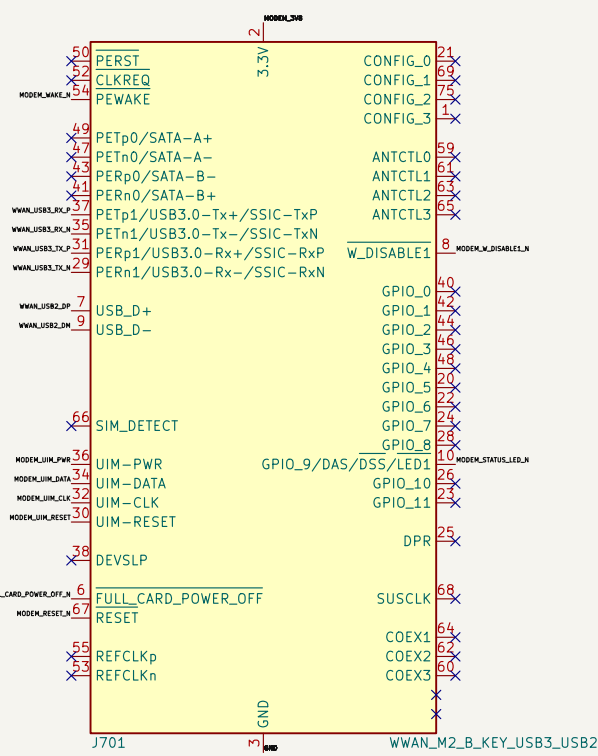


1. UNIVERSAL M.2 B-KEY WWAN SOCKET



2. USB ESD AND MODEM BULK CAPACITANCE



Place USB ESD at the modem socket; route USB 3 pairs as short, continuous 90 ohm differential channels







3. FSA2567 DUAL-SIM MUX



R700 keeps SEL high; SIM 1 is selected by default. SPID control must be open drain; low selects SIM 2




The control domain tracks `MODEM_STAT_PWR`, preventing a fixed 3.3 V overdrive when the SIM rail is 1.8

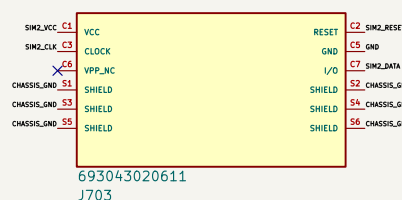

S041: ESD array adjacent to holder; electrical C5 to C40, metal shell to C045525_S041

SINQ: ESQ array adjacent to holder; electrical CS to GND, metal shell to CHASSIS_GND

6. MODEM CONTROL CONTRACT

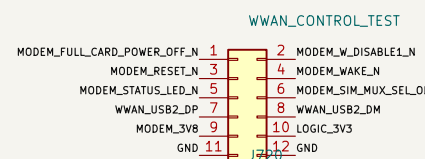

Four shaft module UFL/MBF digitalis terminate at the narrow right-side panel bulkheads; keep clear of PSU and fan motors



Control outputs originate at the system GPIO expander. FULL_CARD_POWER_OFF and RESET require final modem-specific timing validation.

J720 is a BNP factory test footprint, not a top-panel connector.