





1. HDMI TYPE-A SOURCE CONNECTOR

2. HDMI ESD / LOW-CAPACITANCE SHUNTS

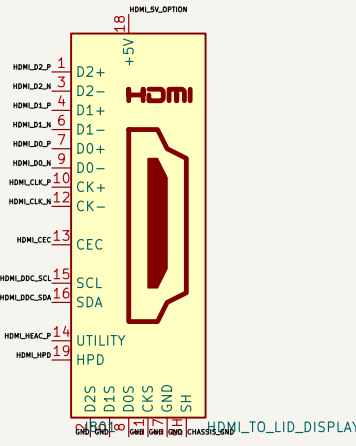

Configure CMS ESD 5.1 tolerance and then pull-up values against the Radxa carrier reference before taped review.






HDMI_HDMI_8 connects around to Row A, the selected monitor uses video/SCL/CEC/HPD only.

Start bench to check at the connector. TMSD return uses the local right ground plane.

Place an HDMI ESD shunt immediately behind (B2) with no slots on TMSD pins.

3. USB TOUCH HOST PORT

4. 12 V / 2.5 A DISPLAY POWER

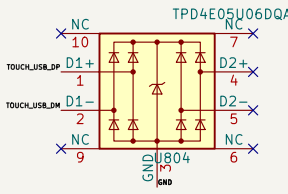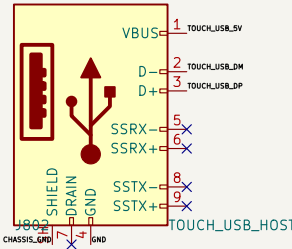

Only USB 2 is allocated from the CMS. A standard USB 2 A-to-B cable with carrier USB 2 touch data.

The monitor-side SuperSpeed Type-B receptacle is not illustrated as a device connector on this host carrier.

DISPLAY_12V single track 2.5 A continuous / 30 W branch, covering the listed 25 W monitor.

No local display eFuses. Use the upstream ATX_12V branch fuse and a 100 nF 10 uVd bypass.

5. HINGE-EDGE HARNESS BUILD

Bundle HDMI, USB A-to-B, and 12 V conductors through the centered hinge-edge notch with a common attraction sleeve.

Position a service loop for full lid travel, cross the bundle on both sides, and keep bend radius outside the hinge pinch line.

All hinge carrier connectors are underside-facing and remain below the top panel; they do not add panel volume.