

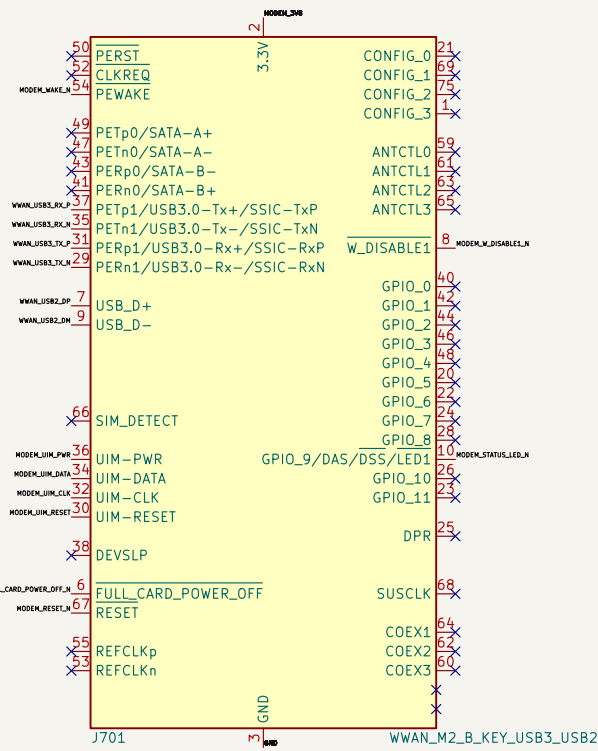



1. UNIVERSAL M.2 B–KEY WWAN SOCKET



2. USB ESD AND MODEM BULK CAPACITANCE







Place USB ESD at the modem socket: route USB 2 pins as short, continuous 90 ohm differential channels.



7702 keeps GSI high SIM 1 is selected by default; SPD control must be open drain; low selects SIM 2.

The control domain blocks WSDM_M2_PWR, providing a fixed 3.3 V condition when the SIM rail is 3.3 V.






ESD ESD array adjacent to bottom electrical I/O to ESD; metal shield to CHASSIS_GND.

ESD ESD array adjacent to bottom electrical I/O to ESD; metal shield to CHASSIS_GND.

Bulk values are the placement location; validate rail drop with the final global modem's load-current profile.

6. MODEM CONTROL CONTRACT

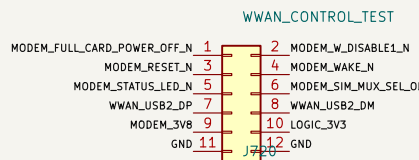

Four short modem I/O/PWR signals terminate at the narrow right-side panel bulkheads; keep clear of PWR and fan modems.

