


CS SERIES CAPACITIVE ANTI-VANDAL SWITCH

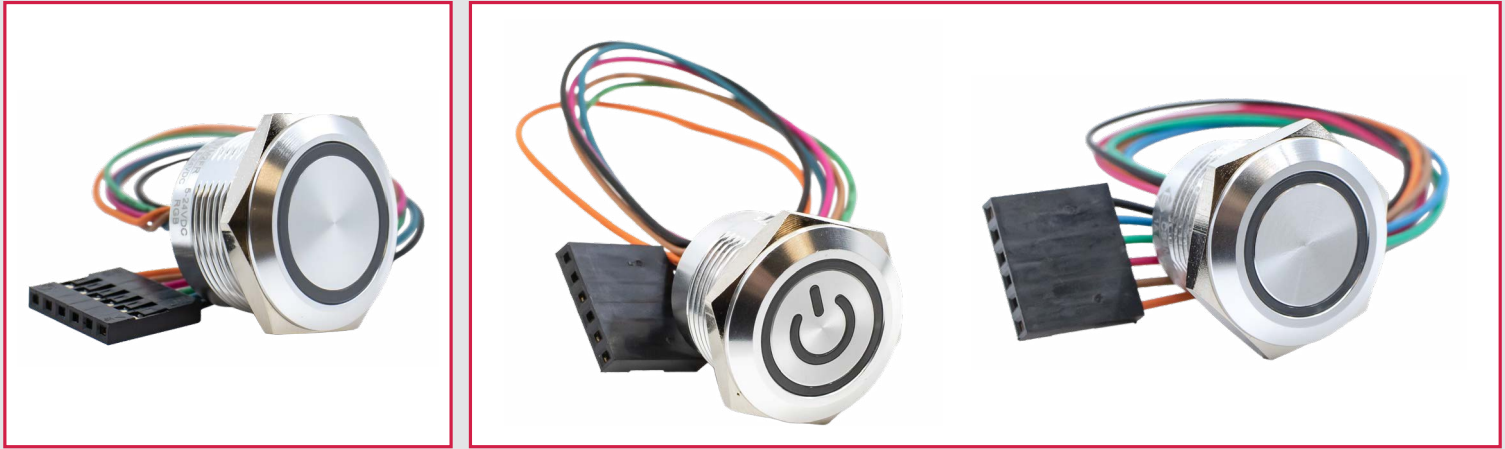

SPECIFICATIONS

Contact Arrangement: SPST
Contact Rating: 1A @ 5-24VDC
Contact Resistance: 1Ω Max.
Electrical Life: 50,000,000 Cycles
Operating Temperature: -40°C to 85°C
Storage Temperature: -40°C to 85°C
Panel Thickness: 10mm Max.
Mounting Nut Torque: 3.0N
Ingress Protection: IP68

FEATURES & BENEFITS

- Capacitive switching technology (Touch Sensor)
- 19mm or 22mm diameter Panel Cutout
- SPST circuit; latching or momentary function
- RGB LED illuminated Ring, or Ring/Power Symbol
- Wire Leads 150mm with connector termination
- Aluminum, clear anodized finish
- 50 million cycles electrical life
- IP68 rated

PART NUMBER CONFIGURATOR

Series



CS

Panel Cutout



4 - 19mm
7 - 22mm

Function



L - Latching
M - Momentary

Material Finish



2 - Aluminum, Clear Anodized

Button Style



F - Flat

Lens Style




R - Ring Illumination
P - Ring/Power Symbol Illumination

NOTES:





Connector: 1 x 6 PIN, JSY Electronics Part Number A2541H-6P or Equivalent
 Terminal: JSY Electronics Part Number A2547T-GP or Equivalent 6 places

Specifications subject to change without notice 7/1/2026








CS SERIES CAPACITIVE ANTI-VANDAL SWITCH - BODY DIMENSIONS

19MM PANEL CUTOUT

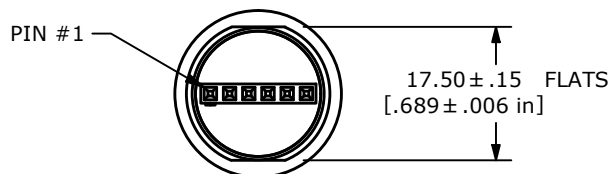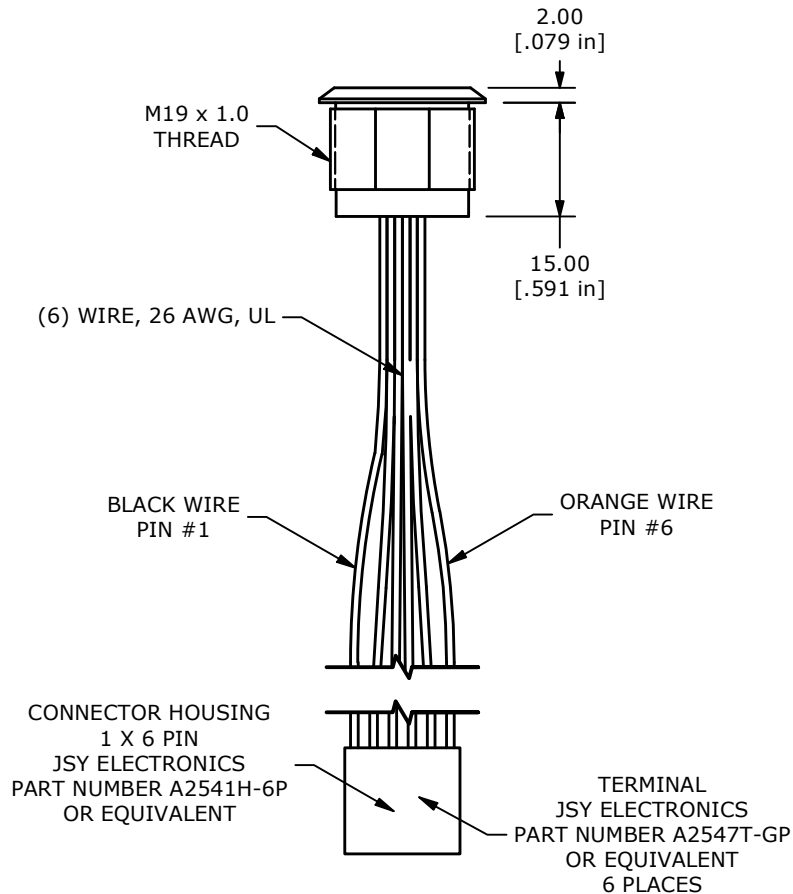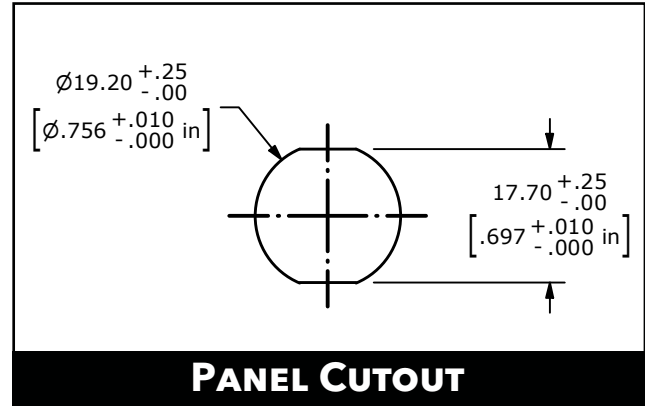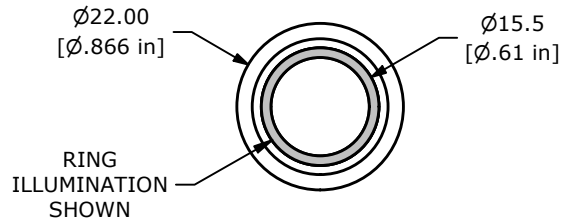


CS SERIES CAPACITIVE ANTI-VANDAL SWITCH - BODY DIMENSIONS

22MM PANEL CUTOUT

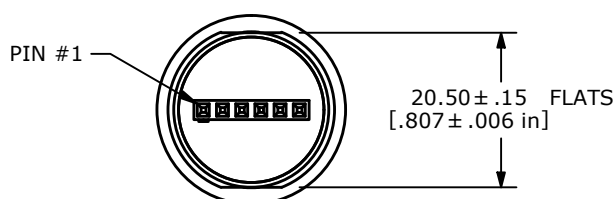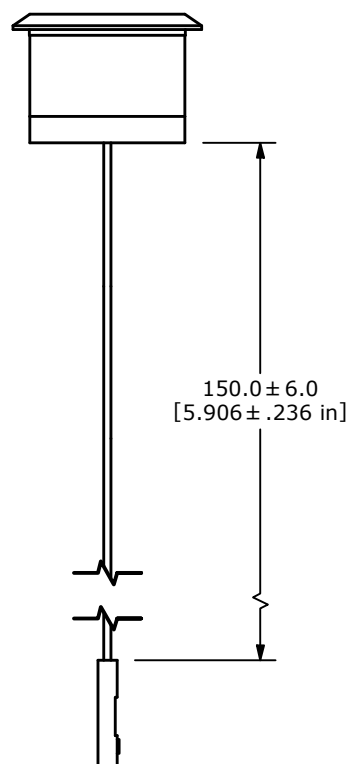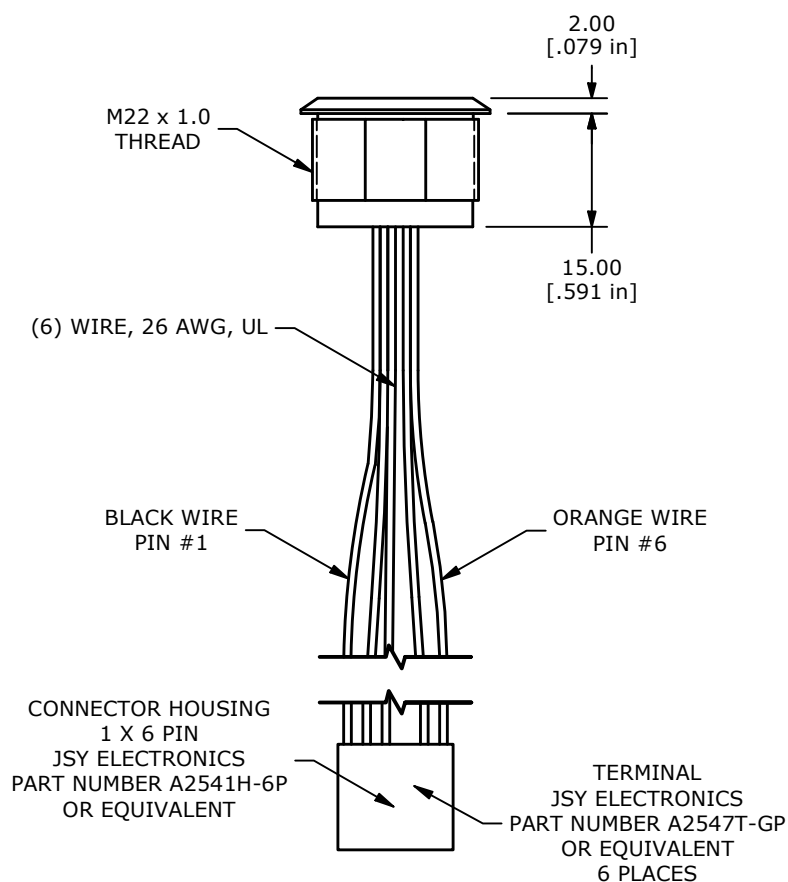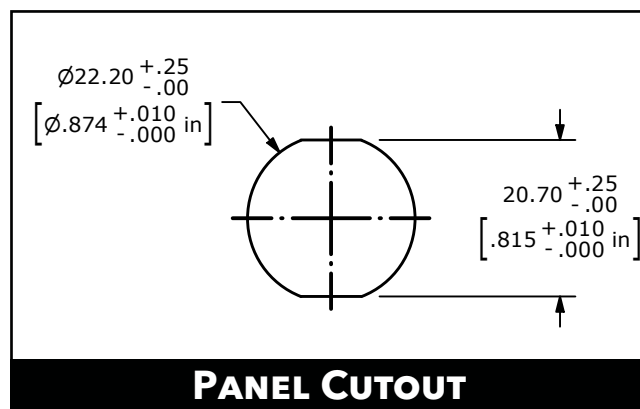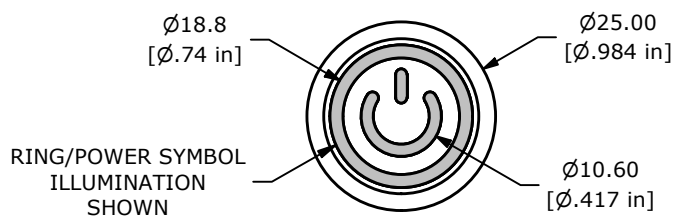


CS SERIES CAPACITIVE ANTI-VANDAL SWITCH - BODY DIMENSIONS


LENS STYLE OPTIONS AND SCHEMATIC

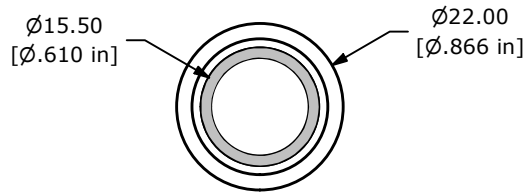


R - RING ILLUMINATION
(19mm Panel Cutout)

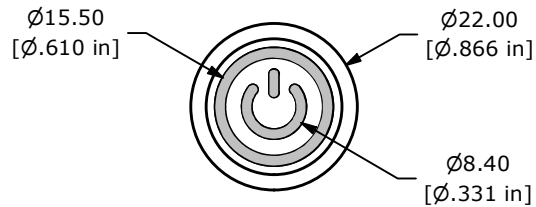


P - RING / POWER SYMBOL ILLUMINATION
(19mm Panel Cutout)

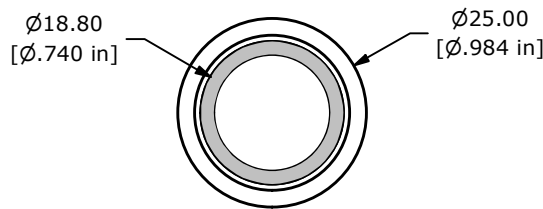

R - RING ILLUMINATION
(22mm Panel Cutout)

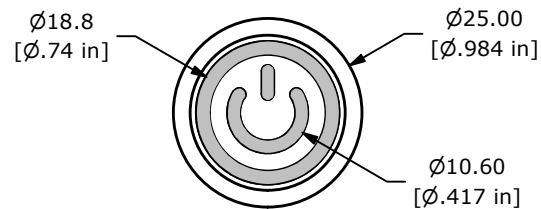

P - RING / POWER SYMBOL ILLUMINATION
(22mm Panel Cutout)

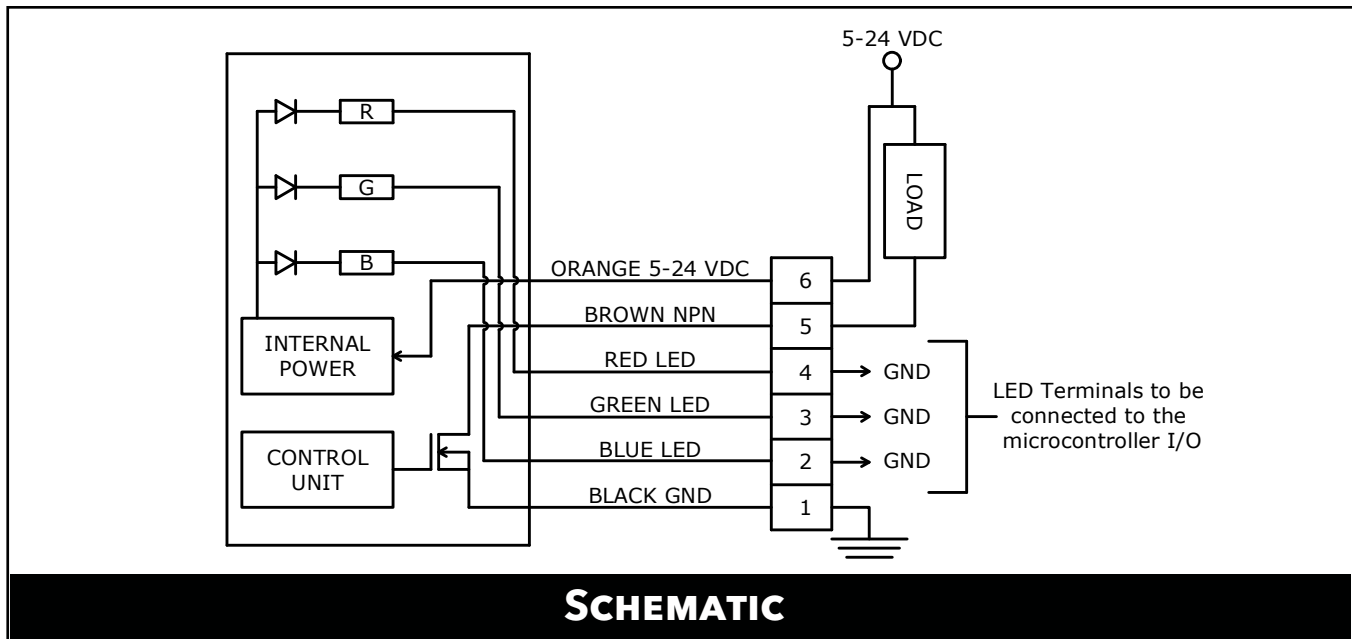

LED NOTES

- Pins 2, 3 or 4 may be connected to a micro controller I/O or TTL/CMOS I/O.
- Individual LEDs are turned ON by grounding connector pins 2, 3 or 4.
 - Grounding pin 2 turns the Blue LED ON
 - Grounding pin 3 turns the Green LED ON
 - Grounding pin 4 turns the Red LED ON
- Individual LEDs may be turned ON/OFF by connecting pins 2, 3 or 4 to pin 5, but supply voltage must not be greater than 12.0 VDC. There is risk of damaging the switch, if the supply voltage is greater than 12.0 VDC. For example: If pin 2 is connected to pin 5, then the Blue LED will come ON, if the load is turned ON. Blue LED will turn OFF, if the load is turned OFF.
- Multiple LEDs should not be turned ON at the same time if the supply voltage is greater than 12.0 VDC. Turning ON multiple LEDs with supply greater than 12VDC may damage switch.