



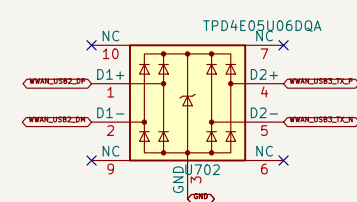


1. UNIVERSAL M.2 B-KEY WWAN SOCKET




2. USB ESD AND MODEM BULK CAPACITANCE

3. FSA2567 DUAL-SIM MUX


4. DIRECT DUAL-SIM DAUGHTERBOARD SOCKET

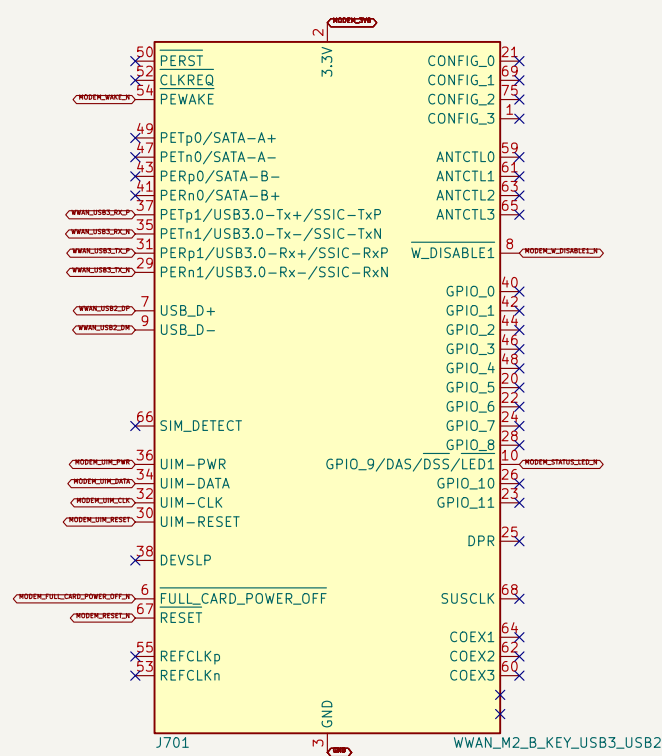

Place USB ESD at the modem socket; route USB 3 pairs as short, continuous 90 ohm differential channels



J700 plugs directly into SIM-SERVICE II. There is no SIM cable harness; the horizontal daughterboard is fixed by four precision supports.



The 2.5 mm D48 stack carries signals only. Four interleaved returns plus six auxiliary ground/chassis plus control loop area and shield impedance.



6. MODEM CONTROL CONTRACT



C706-C712 and U7B1 implement the RM5208-GU, two-bit VCC reference network directly at K2 pins 2/4 and V₁/V₂/V₃.

Power-Regulators C1189-C1190 retain 3320 uf upstream bulk; they do not replace the socket-local 2 x 220 uf and 10F ladders.

5. RF BULKHEAD HARNESS CONTRACT



Four off-board ECI 818233349 (2SS) 99 IV-ta-SM6 bulkhead pigtail; final cable length remains a routed sample gate

Control outputs originate at the system GPIO expander. FULL_CARD_POWER_OFF and RESET require final modem-specific timing validation.

TP7201-TP7208 are copper factory probes. USB 2/3 has no branch or generic test header

RF coax leaves the module directly for four right-side bulkhead antennas
FSA2567 defaults to physical SIM 1; open-drain low selects physical SIM 2
Dedicated 3.8 V / 6 A rail; verify selected modem peak-current waveform
M.2 B-key modem socket supports USB 3.0 and USB 2.0 fallback

ProComm
Sheet: /
File: WWAN-SIM.kicad_sch
Title: Radxa CM5 ProComm Carrier - WWAN and Dual SIM