

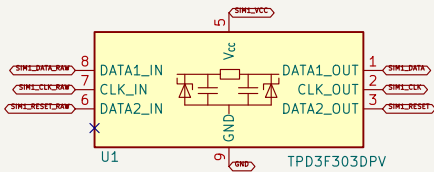

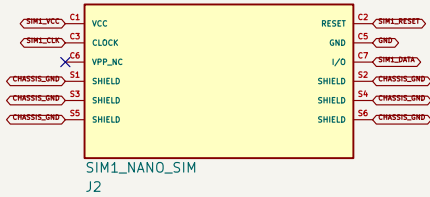


1. DIRECT CARRIER SOCKET

2. GUIDED TOP-FACING NANO-SIM HOLDERS



SIM1: holder shield to chassis: C6/VPP Intentionally NC

Socket mouths face the daughterboard service edge. Do not rotate either socket independently during PCB placement.

J1 directly mates with the 20-way DF40 plug at CM5-CARRIER J702		
TPD3F303 devices sit immediately behind their respective SIM holders		
Four M3 precision spacers and the panel guide carry insertion/removal force		
Horizontal daughterboard; both SIM holders face the top-panel service windows		
ProComm		
Sheet: /		
File: Sim-Service.kicad_sch		
Title: Radxa CM5 ProComm – Direct-Socket Dual-SIM Daughterboard		
Size: A3	Date: 2026-08-17	Rev: A1
KiCad E.D.A. 10.0.5-rc1		Id: 1/1