



Jul.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

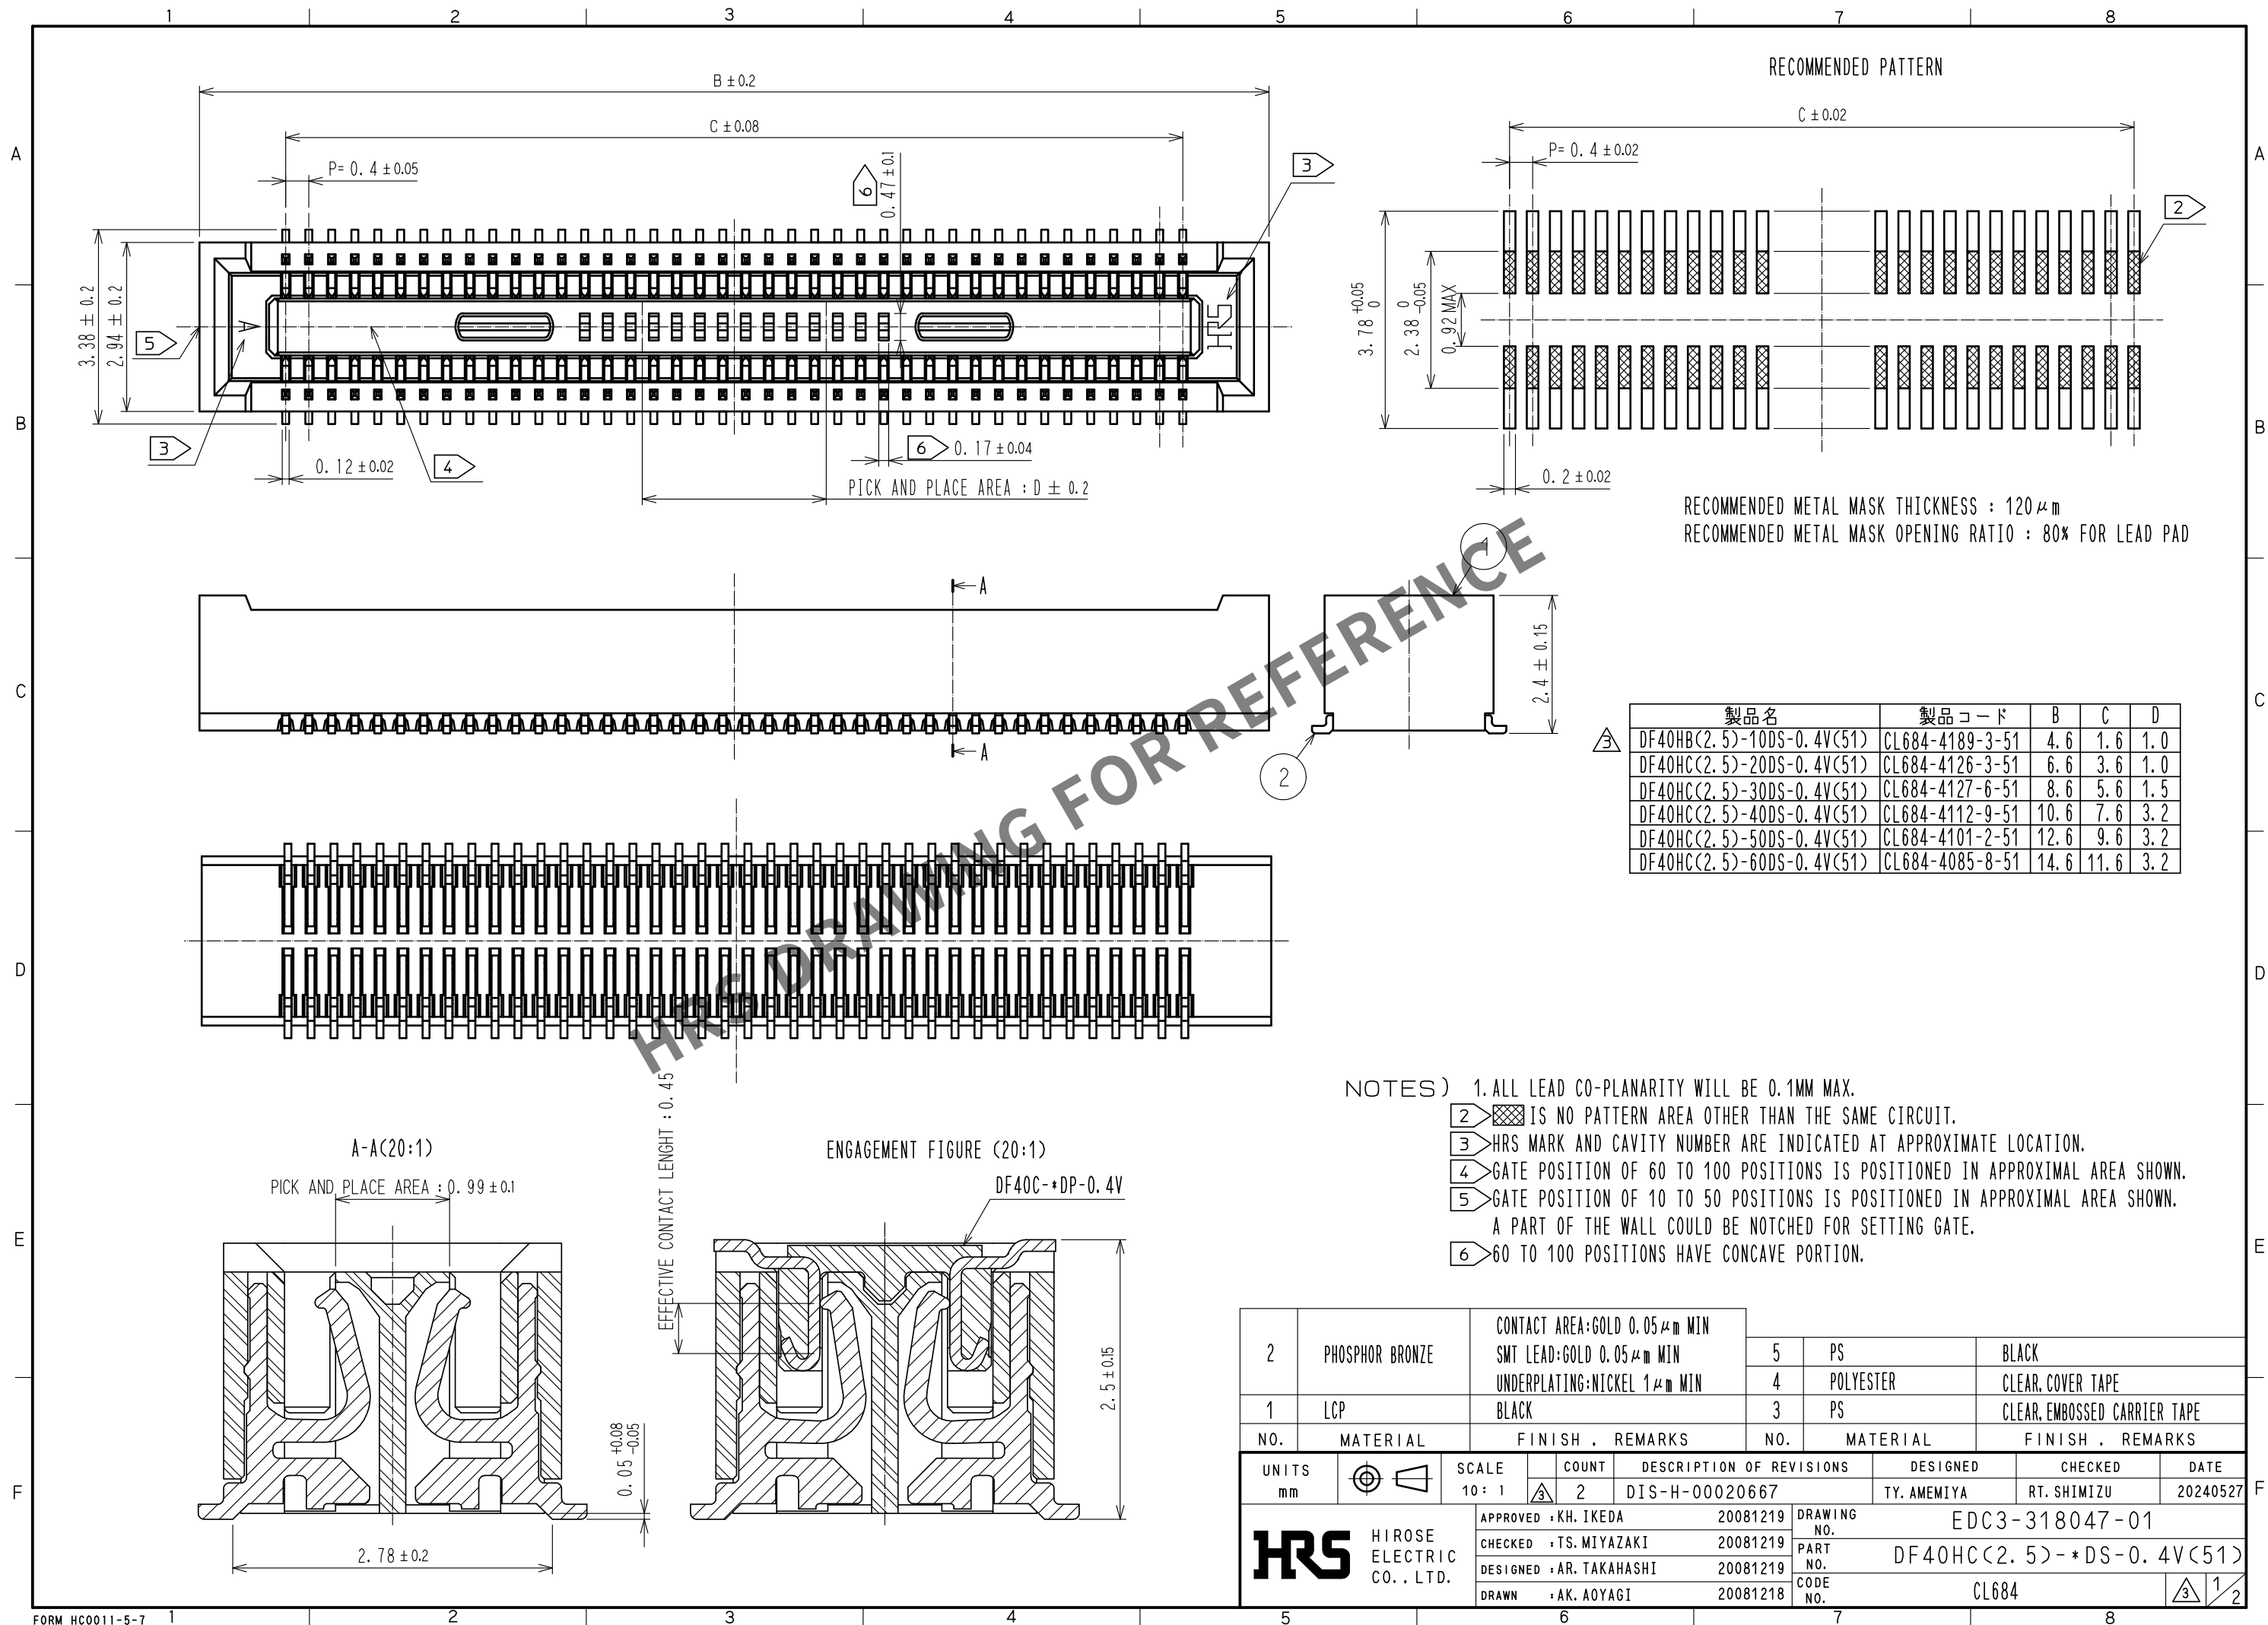



製品名	H	J	K	L	M	N
DF40HB(2.5)-10DS-0.4V(51)	16	—	7.5	4.9	21.5	17.5
DF40HC(2.5)-20DS-0.4V(51)	16	—	7.5	6.9	21.5	17.5
DF40HC(2.5)-30DS-0.4V(51)	24	—	11.5	8.9	29.5	25.5
DF40HC(2.5)-40DS-0.4V(51)	24	—	11.5	10.9	29.5	25.5
DF40HC(2.5)-50DS-0.4V(51)	24	—	11.5	12.9	29.5	25.5
DF40HC(2.5)-60DS-0.4V(51)	24	—	11.5	14.9	29.5	25.5

NOTES) 7. 3,000 CONNECTORS PER REEL.
8. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

9	REFER TO IEC 60286-3 (PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)
10	10 TO 60 POSITIONS EMBOSSED CARRIER TAPE HAS THE SPROCKET HOLE ONLY ONE SIDES.

	DRAWING NO. EDC3-318047-01		
	PART NO. DF40HC(2.5)-*DS-0.4V(51)		
	CODE NO. CL684		