

Computer Networks 1 | CN1

Summary

CONTENTS

1. Application Layer (7,6,5)	4
1.1. Common Ports	4
1.2. HTTP	5
1.3. DNS	6
1.3.1. Record types	6
1.4. E-Mail	6
2. Transport Layer (4)	7
2.1. Primary responsibilities	7
2.2. TCP	7
2.2.1. Reliability	7
2.2.2. Throughput	8
2.2.3. Flow control	8
2.2.4. Congestion control	8
2.3. UDP	9
2.4. QUIC	9
3. Network Layer (3)	9
3.1. Subnetting	9
3.2. IPv6	10
3.2.1. Glossary	10
3.2.2. Special addresses	10
3.2.2.1. Multicast	11
3.2.2.2. DHCPv6	11
3.2.3. Header	11
3.2.3.1. IPv6 Extension Headers currently defined	12
3.2.4. Neighbor Discovery protocol (ND)	12
3.2.4.1. Host - Router Discovery Functions	12
3.2.4.2. Host - Host Communication Functions	12
3.2.4.3. Packet types	13
3.2.5. Stateless Address Autoconfiguration (SLAAC)	13
3.2.5.1. Autoconfigure link-local address	13
3.2.5.2. Perform Duplicate Address Detection (DAD)	13
3.2.5.3. Router search	13
3.2.5.4. Generating global unicast address	14
3.2.6. DHCPv6	14
3.2.6.1. Flags	14
3.3. IPv4	14
3.3.1. Network classes (private nets)	14
3.3.2. Subnetting	14
3.3.2.1. Calculating subnet mask	14
3.3.2.2. Calculating increment	14
3.4. Routing	14

3.4.1. Data plane	14
3.4.2. Control plane	14
3.4.3. Static	15
3.4.4. Dynamic	15
3.4.4.1. Algorithms	15
3.4.4.1.1. Dijkstra's algorithm (Link State)	15
3.4.4.1.2. ? algorithm (Distance vector)	15
3.4.4.2. Protocols	15
3.4.4.2.1. OSPF (Open Shortest Path First)	15
3.4.4.2.2. BGP (Border Gateway Protocol)	15
3.4.5. Fragmentation	15
4. Data Link Layer (2)	15
4.1. Error detection	15
4.1.1. Cyclic Redundancy Check (CRC)	15
4.2. Mutltiple Access Protocols	15
4.3. ARP	15
4.4. Ethernet	15
5. Cisco	15
5.1. Router setup	15
5.2. Interfaces	15
5.2.1. Static IP Assignment	15
5.2.2. DHCP Assignment	15
5.2.3. Show	15
5.3. VLAN	16
5.3.1. Assign IP	16
5.3.2. Access Port	16
5.3.3. Access Port	16
5.3.4. VTP (Virtual Trunk Protocol)	16
5.3.4.1. Server	16
5.3.4.2. Client	16
5.3.5. LACP (Link Aggregation Control Protocol)	16
5.3.6. Load Balancing	16
5.3.7. STP (Spanning Tree Protocol)	16
5.3.7.1. Bridge priority	16
5.3.7.2. Interface costs	16
5.3.7.3. PortFast mode	16
5.3.7.4. Show	16
5.4. Routing	17
5.4.1. Static	17
5.4.1.1. IPv4	17
5.4.1.2. IPv6	17
5.4.2. OSPF	17
5.4.2.1. IPv4	17
5.4.2.2. IPv6	17
5.4.3. Show	17
5.5. DHCP	17
5.5.1. Create Pool	17
5.5.2. Relay Agent	17
5.6. NAT	17

5.6.1. IF Inside	17
5.6.2. IF Outside	17
5.6.3. ACL (Access Control List)	17
5.6.4. PAT (Nat overload)	17
5.7. IPv6	17
5.7.1. DHCPv6	18
5.8. Troubleshooting	18
5.8.1. Ping	18
5.8.2. Traceroute	18
6. Binary, Decimal, Hex	18

1. APPLICATION LAYER (7,6,5)

Combines Layers 7 (Application), 6 (Presentation) and 5 (Session).

1.1. COMMON PORTS


<i>Protocol</i>	<i>Port</i>	<i>Layer 4</i>
DNS	53	UDP, TCP
HTTP	80	TCP
HTTPS	443	TCP
FTP	20, 21	TCP
SMTP	25 (server) 587 (client)	TCP
POP3	110	TCP
DHCP	67 (server) 68 (client)	UDP

1.2. HTTP

<i>Feature</i>	<i>HTTP/1.0</i>	<i>HTTP/1.1</i>	<i>HTTP/2</i>	<i>HTTP/3</i>
Connection Management	One request per connection	Persistent connections by default	Multiplexing allows multiple streams	Uses QUIC for multiplexing
Request Methods	Limited (GET, POST, HEAD)	Enhanced (PUT, DELETE, OPTIONS, etc.)	Same as 1.1	Same as 1.1
Caching	Basic caching support	Improved caching with validation	Advanced caching capabilities	Same as 2 but with improved mechanisms
Header Compression	None	None	HPACK (header compression)	QPACK (header compression)
Server Push	Not supported	Not supported	Supported (automatic resource pushing)	Enhanced support for server push
Performance Improvements	None	Minor improvements over 1.0	Significant improvements in performance and latency	Further improvements in speed and efficiency
SSL/TLS Support	Not inherent	Not inherent, but commonly supported	Built-in support with ALPN (Application-Layer Protocol Negotiation)	Uses QUIC, which incorporates TLS 1.3
Transport Protocol	TCP	TCP	TCP	QUIC

1.3. DNS

Nameservers resolve domains to IP's through a distributed, hierarchical database.

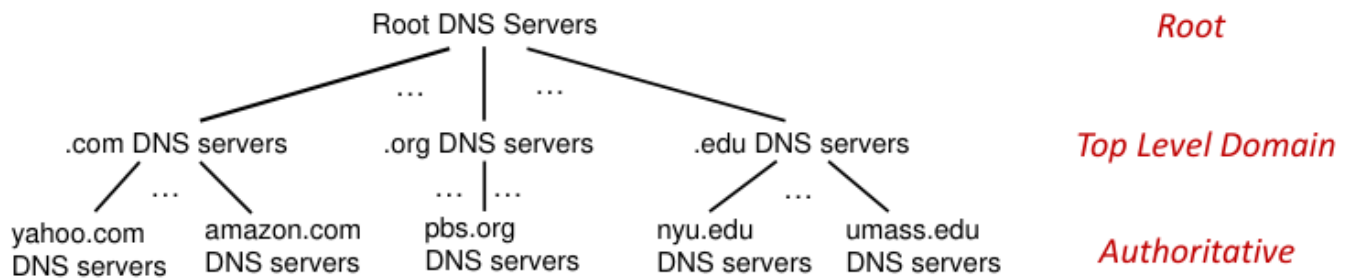

Term	Definition
Iterated query	Local DNS server iteratively asks one server after the other, descending the domain name hierarchy step after step.
Recursive query	Local DNS server asks root server for domain, which in turn asks the TLD server, which in turn asks the authoritative server etc. until the “call stack” unwinds and returns the fully resolved domain to the query sender.
Caching	

1.3.1. Record types

Term	Definition
A	name: hostname value: IPv4 address
AAAA	name: hostname value: IPv6 address
CNAME	name: alias value: canonical name
NS	name: domain value: hostname of authoritative NS for this domain
MX	name: domain value: name of mailserver

1.4. E-MAIL

Term	Definition
ding	
dong	
your	
opinion	
is	
wrong	

2. TRANSPORT LAYER (4)

Segment size: 1440-1480b when using IPv4, <=1460b when using IPv6

2.1. PRIMARY RESPONSIBILITIES

- Process-to-process delivery (distinguish between multiple applications via ports)
- Ensure reliable transfer (acknowledgments, retransmissions & reordering)
- Flow control (sender does not overwhelm receiver)
- Congestion control (network is not overloaded)

Term	Definition
Port	16 bit long numbers (0d0-0d65'535) for identifying applications to send packets to. Well-Known: 0d0-0d1'023 for universal TCP/IP applications, managed by the IANA. Registered: 0d1'024-0d49'151 for known applications, also managed by the IANA. Private: 0d49'152-0d65'535 for custom applications, not managed by the IANA.
Socket	Combination of IP:Port .
Multiplexing	Sending data from multiple sockets at sender.
Demultiplexing	Delivering segments to correct socket at receiver.
Checksum	Detect errors (i.e., flipped bits) in transmitted segment.

2.2. TCP

Connection-oriented, bidirectional, reliable, managed data flow.

Term	Definition
Handshake	Agreement on starting sequence numbers, maximum segment size and window scaling . 1) SEQ 2) SEQ+ACK 3) ACK
FIN	Termination of a connection. 1) FIN 2) FIN+ACK 3) ACK
Round Trip Time	RTT is the time it takes for a packet to be sent to the receiver and acknowledged back to the sender.
Buffer size	Maximum amount of data (measured in bytes) that can be stored in memory while waiting to be processed or transmitted.
Maximum Segment Size	MSS is the maximum payload size of a TCP packet. In IPv4 networks, typically, the size of the MSS is 1460 bytes because it is encapsulated in the data link layer Ethernet frame size of 1500 bytes .

2.2.1. Reliability

Term	Definition
Sequence numbers	SEQ ensures that the packets arrive or can be reassembled in order.
Acknowledgement	ACK ensures that the receiver gets all of the packets.

Term	Definition
Retransmission timeout	If an acknowledgment is not received before the timer for a segment expires, a retransmission timeout occurs, and the segment is automatically retransmitted .
Packet loss rate	Measures how many packets of the ones being sent actually arrive.

2.2.2. Throughput

Term	Definition
Throughput	Denoted by T , is the amount of data that can be transmitted during a specified time. $T = \frac{W}{R} \leq C_{L3}$
Continuous sending	Sender transmits a stream of data packets in the given window size without waiting for acknowledgments .
Delayed ACK	Receiver waits for a short period to acknowledge multiple segments with a single ACK .
Selective ACK	Instead of asking for a retransmission of all missing segments, SACK (specified by the receiver) allows the sender to send only the lost segments, significantly improving efficiency.


2.2.3. Flow control


So that the sender does not overwhelm the receiver.

Term	Definition
Window Size	Denoted by W , is a 16 bit number sent with each packet by the receiver inside of the rwnd header field, indicating the amount of data he still has space for.
Window scale	Used when the TCP window size needs to be increased beyond the traditional maximum of 65,535 bytes due to the demands of high-speed networks. If the handshake header includes the window scale option and the packet header includes the scaling factor then the effective window size is calculated as such: window size * scaling factor

2.2.4. Congestion control

To prevent network congestion.

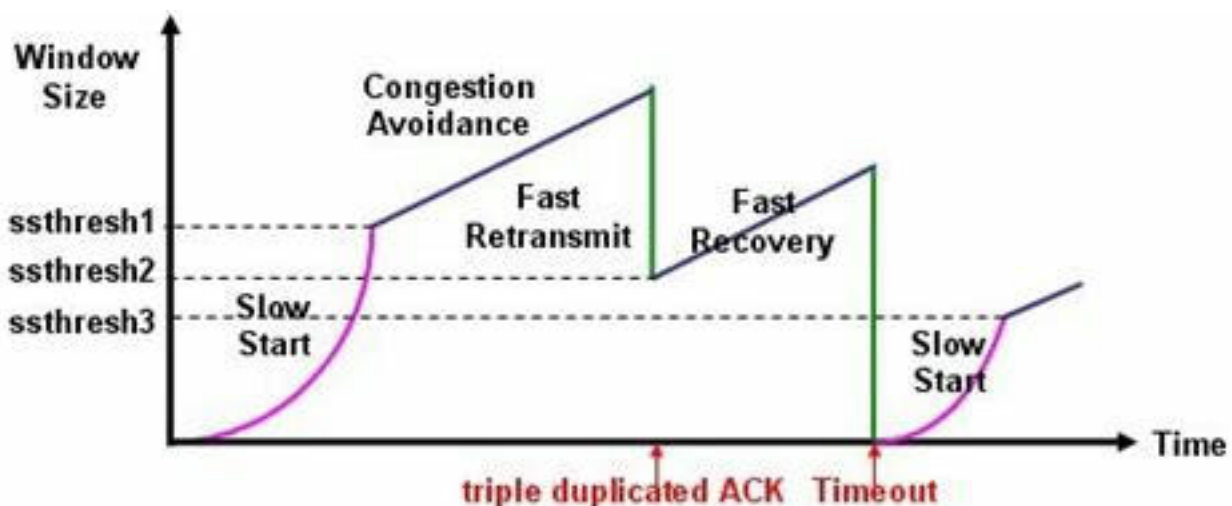

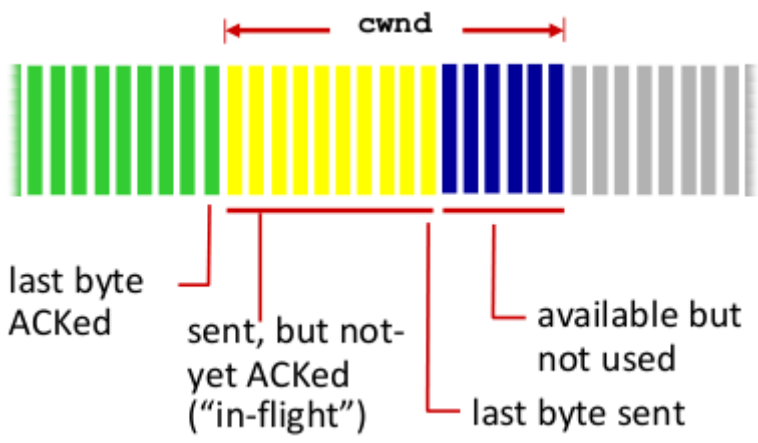Term	Definition
Congestion window	
Sliding Window	Describes the process of the congestion window sliding to the right after receiving ACKs.
Slow start	Gradual growth (doubling cwnd every RTT) within the congestion window size at the start of a connection or after a period of state of no activity. Purpose: Allows the sender to probe the available bandwidth in a controlled way.
Congestion avoidance	Transition from sluggish start to congestion avoidance segment after accomplishing a threshold. Purpose: Maintains a truthful share of the community bandwidth even as heading off excessive congestion.
Fast Retransmit	Detects packet loss through duplicate acknowledgments and triggers speedy retransmission without waiting for the retransmission timeout . Purpose: Speeds up the recuperation method with the aid of retransmitting lost packets without looking ahead to a timeout.
Fast Recovery	Enters a quick healing state after detecting packet loss, lowering congestion window and transitioning to congestion avoidance. Purpose: Accelerates healing from congestion by way of avoiding a complete go back to slow begin after packet loss.
AIMD	Adjusts the congestion window size based on network situations following the Additive Increase, Multiplicative Decrease principle. Purpose: Provides a balanced approach by way of linearly growing the window all through congestion avoidance and halving it on packet loss.

2.3. UDP

2.4. QUIC

Actually a layer 7 Protocol, running on top of UDP

3. NETWORK LAYER (3)

Packet size: **1500b**

3.1. SUBNETTING

Dividing a **/X** network into **n** amount of **/Y** subnets: $2^{Y-X} = n$.

Eg: Dividing a **/16** network into **/24** subnets will yield **256** subnets, because $2^{24-16} = 2^8 = 256$

3.2. IPV6

3.2.1. Glossary

<i>Term</i>	<i>Definition</i>
Extension Header	Additional headers used in IPv6 to provide optional information. These can define aspects like payload size, routing, or fragmentation.
DHCPv6	Dynamic Host Configuration Protocol for IPv6; this allows servers to assign IPv6 addresses dynamically from a pool, similar to DHCP for IPv4.
NAT64	Network Address Translation from IPv6 to IPv4 and vice versa; it facilitates communication between IPv6 and IPv4 networks.
Neighbor Discovery Protocol (NDP)	A protocol in IPv6 for discovering other network nodes, determining their link-layer addresses, and ensuring that addresses are valid and reachable.
Internet Control Message Protocol (ICMPv6)	A crucial part of IPv6 that handles error messages and operational queries, with an expanded role compared to ICMP in IPv4.
MTU	Maximum Transmission Unit; the size of the largest packet that can be sent in a single frame over a network medium. IPv6 can handle larger MTUs compared to IPv4.
Multicast Listener Discovery (MLD)	IPv6 multicast routers can use MLD to discover multicast listeners on a directly attached link.
Path MTU Discovery (PMTUD)	Protocol for determining the Maximum Transmission Unit (MTU) size on the network path between two hosts, usually with the goal of avoiding IP fragmentation.

3.2.2. Special addresses

<i>Term</i>	<i>Definition</i>
Link-local Address	FE80::/10 Used for local communication between devices on the same network segment.
Global Unicast Address	2000::/3 A globally routable address, these addresses are equivalent to public IPv4 addresses and can be reached over the internet.
Unique Local Address (ULA)	FC00::/7 An address for local communication that is not routable on the global internet, similar to private addresses in IPv4.
Multicast Address	FF00::/8 An address that enables a single packet to be sent to multiple destinations simultaneously.
Anycast Address	An address assigned to multiple interfaces, where a packet sent to an anycast address is routed to the nearest (in terms of routing distance) interface.
Reserved Address	Certain ranges in IPv6 are reserved for future use or specific functions. For example, addresses starting with ::/128 are reserved for unspecified addresses.
Documentation Address	2001:DB8::/32 Designated specifically for use in documentation and examples, ensuring it does not conflict with real-world addresses.

<i>Term</i>	<i>Definition</i>
Link-local Multicast Address	FF02::/16 Part of the link-local address range; it enables devices to communicate within a local network without requiring an external routing address.

<i>Addresses</i>	<i>Range</i>	<i>Scope</i>
Unspecified	::/128	n/a
Loopback	::1	Host
IPv4-Embedded	64:ff9b::/96	n/a
Discard-Only	100::/64	n/a
Link-Local	fe80::/10	Link
Global Unicast	2000::/3	Global
Unique Local (ULA)	fc00::/7	Global
Multicast	ff00::/8	Variable

3.2.2.1. Multicast

<i>Term</i>	<i>Definition</i>
ff02::1	All nodes, within scope 2 (link-local).
ff02::2	All routers, within scope 2 (link-local).
ff02::1:ffxx:xxxx	The IPv6 node joins a solicited multicast address group from all the interfaces where unicast and anycast addresses are configured. Its scope is the link-local.

3.2.2.2. DHCPv6

<i>Term</i>	<i>Definition</i>
ff02::1:2	A link-scoped multicast address used by a client to communicate with neighboring (i.e., on-link) relay agents and servers. All servers and relay agents are members of this multicast group.
ff05::1:3	A site-scoped multicast address used by a relay agent to communicate with servers, either because the relay agent wants to send messages to all servers or because it does not know the unicast address of the servers.

3.2.3. Header

<i>Term</i>	<i>Definition</i>
Version	Always 6 with IPv6. IPv4 would be 4.
Flow Label	For identifying packets that require special handling, like real-time streaming.
Traffic Class	Priority or type of traffic.
Payload Length	Size of the payload in bytes.
Next Header	Type of optional header following the IPv6 header.
Hop Limit	Maximum number of hops a packet can take before being discarded.

3.2.3.1. IPv6 Extension Headers currently defined

<i>Term</i>	<i>Definition</i>
Routing	Extended routing, like IPv4 loose source route. The Routing header is used by an IPv6 source to list one or more intermediate nodes to be “visited” on the way to a packet’s destination. There are different types of routing headers defined for different uses.
Fragmentation	Fragmentation and reassembly. The Fragment header is used by an IPv6 source to send a packet larger than would fit in the path MTU to its destination.
Authentication	Integrity and authentication, security. The Authentication Header (AH) is used by IPsec to provide security services like integrity and data origin authentication to IPv6 traffic.
Encapsulating Security Payload	Confidentiality. Encapsulating Security Payload (ESP) Extension Header [RFC2406(opens in a new tab)] is used by IPsec to provide security services like confidentiality and/or integrity to IPv6 packets. The ESP Extension Header can be followed by an additional Destination Options Extension Header and the upper layer datagram.
Hop-by-Hop Option	Special options that require hop-by-hop processing. The Hop-by-Hop Options header is used to carry optional information that may be examined and processed by every node along a packet’s delivery path. The information is included in the form of one or more options using a TLV (Type-Length-Value) format.
Destination Options	Optional information to be examined by the destination node. The Destination Options header is used to carry optional information that is meant to be examined only by a packet’s destination node(s). The information is included in the form of one or more options using a TLV (Type-Length-Value) format.

3.2.4. Neighbor Discovery protocol (ND)**3.2.4.1. Host - Router Discovery Functions**

<i>Term</i>	<i>Definition</i>
Router discovery	Hosts can locate routers residing on attached links.
Prefix discovery	Hosts can discover address prefixes that are on-link for attached links.
Parameter discovery	Hosts can find parameters (e.g., MTU).
Address autoconfiguration	Stateless configuration of addresses of network interfaces.
Redirect	Provide a better next-hop route for certain destinations.

3.2.4.2. Host - Host Communication Functions

<i>Term</i>	<i>Definition</i>
Address resolution	Mapping between IP addresses and link-layer addresses. This is equivalent to ARP for IPv4. This function allows to resolve the link-layer address of another node in the link when only the IPv6 address of that node is known.

<i>Term</i>	<i>Definition</i>
Next-hop determination	Hosts can find next-hop routers for a destination.
Neighbor unreachability detection (NUD)	Determine that a neighbor is no longer reachable on the link.
Duplicate address detection (DAD)	Nodes can check whether an address is already in use.

3.2.4.3. Packet types

<i>Name</i>	<i>Type</i>	<i>Description</i>
Router Solicitation (RS)	133	To locate routers on an attached link.
Router Advertisement (RA)	134	Used by routers to advertise their presence periodically or in response to a RS message.
Neighbor Solicitation (NS)	135	To find the MAC-address of the neighbor or to check if the neighbor is still reachable.
Neighbor Advertisement (NA)	136	To respond to a Neighbor Solicitation message.
Redirect	137	To point the host to a better first hop router for a destination.

3.2.5. Stateless Address Autoconfiguration (SLAAC)

A method for automatically configuring IPv6 addresses without a DHCP server, relying on local network information.

3.2.5.1. Autoconfigure link-local address

Mac address: **70:07:12:34:56:78**

- 1) Flip **7th** bit: **72:07:12:34:56:78**. If it is "0", the address is locally administered and if it is "1", the address is globally unique.
- 2) Insert **FFEE** in the middle: **7207:12FF:EE34:5678**
- 3) Combine with link-local prefix: **FE80::7207:12FF:EE34:5678**

New address: **FE80::7207:12FF:EE34:5678**

3.2.5.2. Perform Duplicate Address Detection (DAD)

To make sure that the address is actually unique in the local segment.

Upon configuring an IPv6 address, every node joins a **multicast group** identified by the address **FF02::1:FFxx:xxxx** where xx:xxxx are the **last 6 hexadecimal values** in the IPv6 unicast address, eg. **FF02::1:FF34:5678**

- 1) The host sends a Neighbor Solicitation message from the Unspecified Address (::) to the Solicited Node multicast address.
- 2) If the generated address is in use, the host using that address sends a Neighbor Advertisement back. The sending host then knows the tentative address can not be used.
- 3) The host then proceeds to generate a new address and sends a new Neighbor Solicitation message to the link.
- 4) If there is no reply after some time, the host informs all the other hosts that it uses this address and it sends a Neighbor Advertisement message to the All Nodes address.
- 5) The host assigns the address to the interface and now has an active IPv6 link. This is the so-called Link-local Address Assignment.

3.2.5.3. Router search

- 1) Router solicitation
- 2) Router advertisement

3.2.5.4. Generating global unicast address

Based on the information from the Router Advertisement, the host generates a global unicast address and wants to know if it is available to use, so it does the DAD process again. If it is not a duplicate, the host will use it.

3.2.6. DHCPv6

3.2.6.1. Flags

Term	Definition
A	Host can perform SLAAC to generate its own IPv6 address based on the prefix(es) contained in the RA message.
O	Host can fetch additional options from the DHCPv6. The DHCPv6 does not provide IPv6 addresses in this case.
M	Host will get its IP address and additional options from a DHCPv6 server.
L	The prefix shared in the RA is reachable on the link.

3.3. IPV4

3.3.1. Network classes (private nets)

Term	Definition
A	10.0.0.0 - 10.255.255.255 (10/ 8 prefix)
B	172.16.0.0 - 172.31.255.255 (172.16/ 12 prefix)
C	192.168.0.0 - 192.168.255.255 (192.168/ 16 prefix)

3.3.2. Subnetting

3.3.2.1. Calculating subnet mask

/24 = **1111 1111 . 1111 1111 . 1111 1111 . 0000 0000** = 255.255.255.0

/10 = **1111 1111 . 1100 0000 . 0000 0000 . 0000 0000** = 255.192.0.0

3.3.2.2. Calculating increment

Address increment = $\frac{\text{amount of addresses}}{256}$ or $2^{8-(\text{mask mod } 8)}$

Let there be 4 subsequent networks starting with 10.0.0.0, each being /20

Amount of addresses = $2^{32-20} = 2^{12} = 4096$. Increment = $\frac{4096}{256} = 16$

Alternatively: $2^{8-(20 \bmod 8)} = 2^{8-4} = 2^4 = 16$

Networks = 10.0.0.0/20, 10.0.16.0/20, 10.0.32.0/20, 10.0.48.0/20

3.4. ROUTING

3.4.1. Data plane

- local, per-router function
- determines how datagram arriving on router input port is forwarded to router output port

3.4.2. Control plane

- network-wide logic
- determines how datagram is routed among routers along end-to-end path from source to destination host

3.4.3. Static

3.4.4. Dynamic

3.4.4.1. Algorithms

3.4.4.1.1. Dijkstra's algorithm (Link State)

3.4.4.1.2. ? algorithm (Distance vector)

3.4.4.2. Protocols

3.4.4.2.1. OSPF (Open Shortest Path First)

3.4.4.2.2. BGP (Border Gateway Protocol)

3.4.5. Fragmentation

– offset = transferred bytes / 8

4. DATA LINK LAYER (2)

4.1. ERROR DETECTION

EDC

4.1.1. Cyclic Redundancy Check (CRC)

4.2. MULTIPLE ACCESS PROTOCOLS

4.3. ARP

4.4. ETHERNET

5. CISCO

5.1. ROUTER SETUP

```
Router> enable
Router# configure terminal
Router(config)#
```

5.2. INTERFACES

5.2.1. Static IP Assignment

```
Router(config)# interface GigabitEthernet 0/0/1
Router(config-if)# ip address 172.16.0.0 255.255.255.252
Router(config-if)# no shutdown
Router(config-if)# exit
```

5.2.2. DHCP Assignment

```
Router(config)# interface GigabitEthernet 0/1/1
Router(config-if)# ip address dhcp
Router(config-if)# no shutdown
Router(config-if)# exit
```

5.2.3. Show

```
Router(config)# do show ip interface brief
Router# show ip interface brief
Router# show ip interface GigabitEthernet 0/0/1
```

5.3. VLAN

```
Switch(config)# vlan 120
Switch(config-if)# name vlan-server
Switch(config-if)# exit
```

5.3.1. Assign IP

```
Switch(config)# interface vlan 120
Switch(config-if)# ip address 10.120.0.10 255.255.255.0
```

5.3.2. Access Port

```
Switch(config)# interface GigabitEthernet 0/0/1
Switch(config-if)# switchport mode access
Switch(config-if)# switchport access vlan 120
Switch(config-if)# exit
Switch(config)# interface GigabitEthernet 0/0/1-5
Switch(config-if)# switchport mode access
Switch(config-if)# switchport access vlan 120
Switch(config-if)# exit
```

5.3.3. Access Port

```
Switch(config-if)# switchport mode trunk
```

5.3.4. VTP (Virtual Trunk Protocol)

5.3.4.1. Server

```
Switch(config)# vtp domain ins
Switch(config)# vtp mode server
```

5.3.4.2. Client

```
Switch(config)# vtp domain ins
Switch(config)# vtp mode client
```

5.3.5. LACP (Link Aggregation Control Protocol)

```
Switch(config-if)# channel-group 5 mode active
Switch(config-if)# channel-group 5 mode passive
```

5.3.6. Load Balancing

```
Switch(config)# port-channel load-balance <strategy>
```

5.3.7. STP (Spanning Tree Protocol)

5.3.7.1. Bridge priority

```
Switch(config)# spanning-tree vlan 1 priority <priority>
```

5.3.7.2. Interface costs

```
Switch(config-if)# spanning-tree cost 100
```

5.3.7.3. PortFast mode

```
Switch(config-if)# spanning-tree portfast
```

5.3.7.4. Show

```
Switch# show spanning-tree
Switch# show spanning-tree root
```


5.4. ROUTING

5.4.1. Static

5.4.1.1. IPv4

```
Router(config-if)# ip route <destination_network_id> <subnet_mask> <next_hop_router>  
<administrative_distance>?
```

```
Router(config-if)# ip route 10.0.0.0 255.0.0.0 192.168.1.1
```

5.4.1.2. IPv6

```
Router(config-if)# ip route <ipv6_prefix> <outgoing_interface> <next-hop>  
<administrative_distance>?
```

```
Router(config-if)# ipv6 route 2001:db8:2103:a::/64 GigabitEthernet1/0/1  
fe80::ba27:ebff:fea8:3e50
```

5.4.2. OSPF

5.4.2.1. IPv4

```
Router(config)# router ospf <process-id>
```

```
Router(config-if)# ip ospf <process-id> area <area-nr>
```

5.4.2.2. IPv6

```
Router(config)# ipv6 router ospf <process-id>
```

```
Router(config-if)# ipv6 ospf <process-id> area <area-nr>
```

5.4.3. Show

```
Router# show ip route
```

```
Router# show ip ospf route
```

5.5. DHCP

5.5.1. Create Pool

```
Router#(config-if) ip dhcp pool DEV  
network 192.168.1.0 255.255.255.0  
default-router 192.168.1.1  
dns-server 1.1.1.1 8.8.8.8  
lease 5  
domain-name enterprise.com
```

5.5.2. Relay Agent

```
Router(config-if)# ip helper-address 176.16.12.10
```

5.6. NAT

5.6.1. IF Inside

```
Router(config-if)# ip nat inside
```

5.6.2. IF Outside

```
Router(config-if)# ip nat outside
```

5.6.3. ACL (Access Control List)

```
Router(config-if)# access-list 1 permit 192.168.1.0 0.0.0.255
```

5.6.4. PAT (Nat overload)

```
Router(config-if)# ip nat inside source list 1 interface GigabitEthernet0/1 overload
```

5.7. IPV6

```
Router(config-if)# ipv6 enable
```

5.7.1. DHCPv6

```
Router(config-if)# ipv6 dhcp client pd MY_PREFIX  
Router(config-if)# ipv6 address autoconfig default
```

5.8. TROUBLESHOOTING

5.8.1. Ping

```
Router# ping <destination-ip> source <interface-name>
```

5.8.2. Traceroute

```
Router# traceroute <destination-ip> source <interface-name> numeric
```

6. BINARY, DECIMAL, HEX

0xA4 6A = 0b1010 0100 0110 1010 = 0d42'090

0x04 B0 = 0b0100 1011 0000 = 0d1'200

0x01 D4 C0 = 0b0001 1101 0100 1100 0000 = 0d120'000