



- NOTES, UNLESS OTHERWISE SPECIFIED:
- 1. Remove all burrs and break all sharp edges .020/.005
 - 2. All internal radii shall be R.01 MAX
 - 3. Blade: 0.875 bore/arbor to be free of paint or other soft, gummy coatings.
 - 4. Adapter: 0.875 boss and marked mating surface to be free of paint or other soft, gummy coatings.
 - 5. Adapter: If coating is required, coating must not be easily removed.
 - 6. Adapter: If coated, tolerances are after coating.

REVISIONS			
REV.	DESCRIPTION	DATE	BY

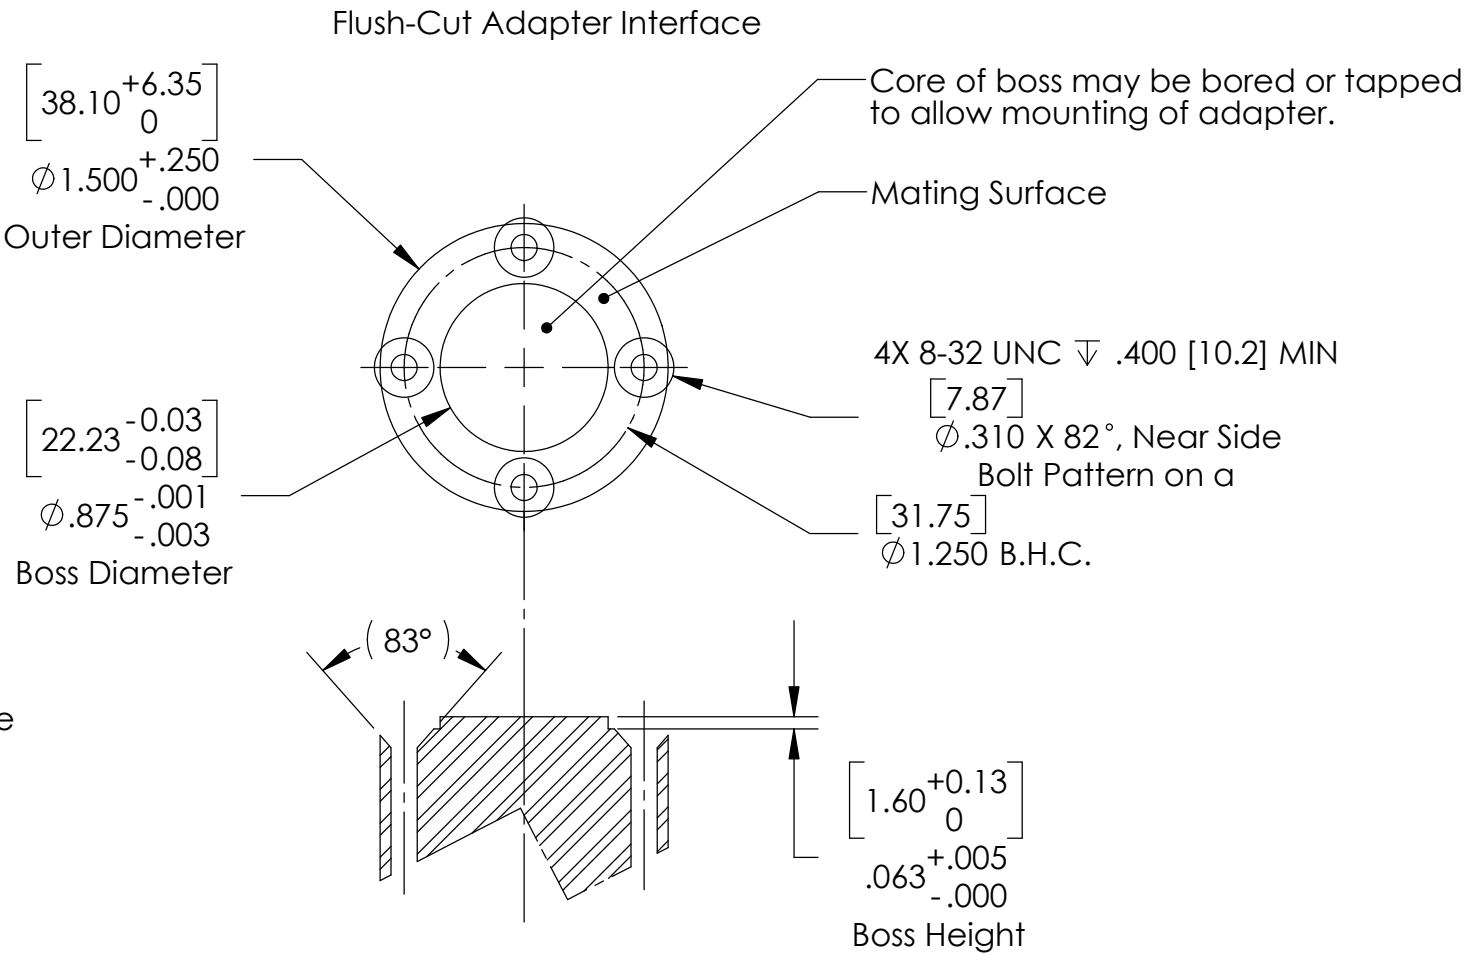

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Omega Diamond, Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Omega Diamond, Inc IS PROHIBITED.

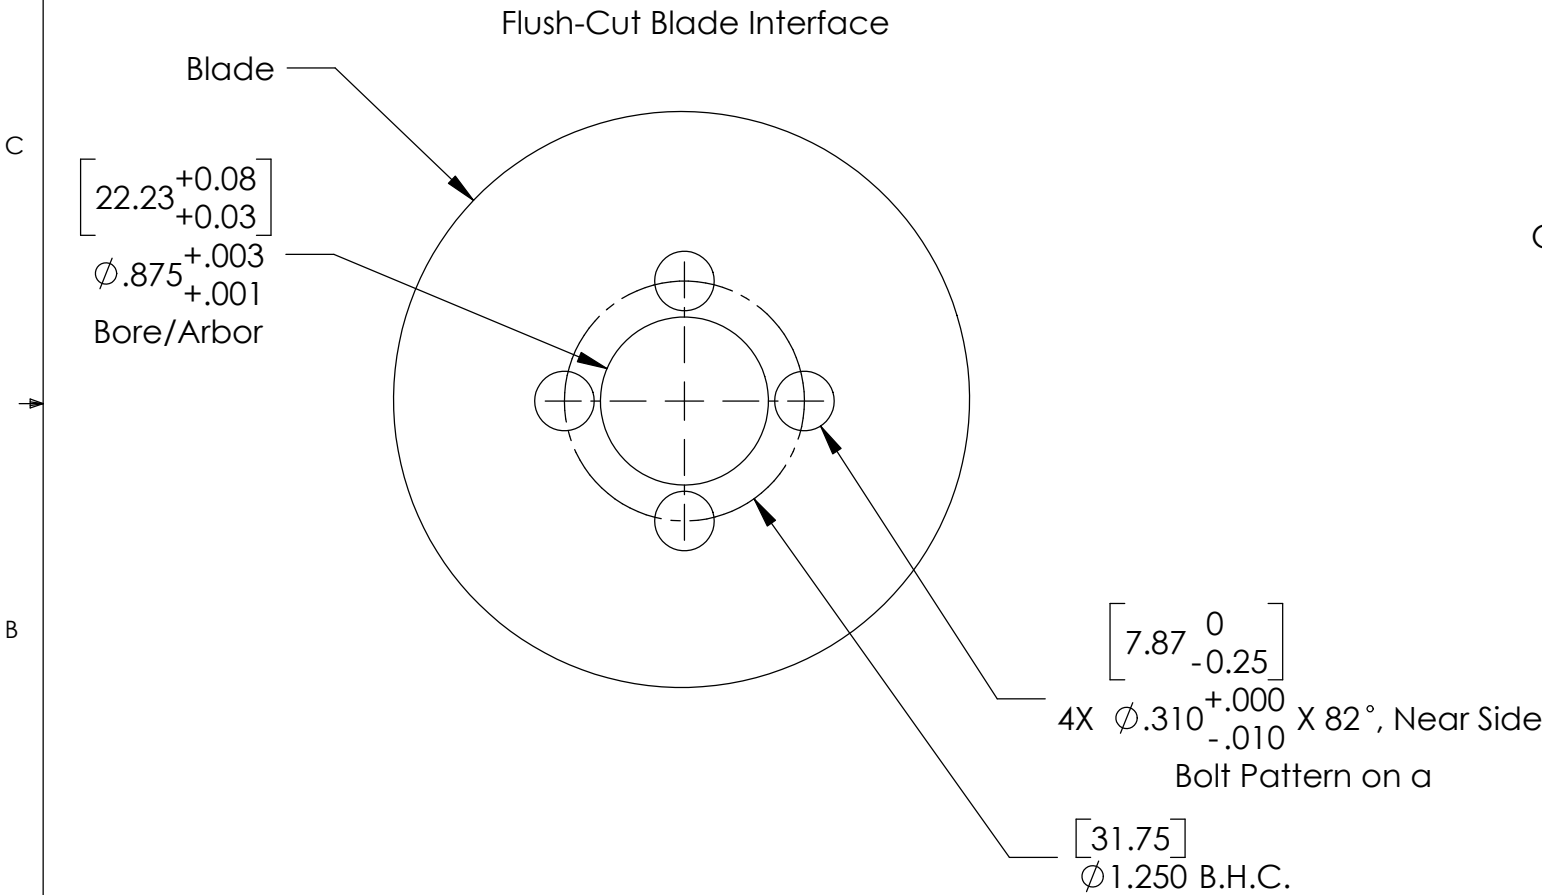

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED:		NAME		DATE		Omega Diamond, Inc					
DIMENSIONS ARE IN INCHES [DUAL DIMENSIONS ARE IN MM]		DRAWN		RWC						9/13/2013	
TOLERANCES:		CHECKED						TITLE: Flush-Cut Interface Spec			
FRACTIONAL ±1/16		ENG APPR.									
ANGULAR: MACH±.1 BEND ±1		MFG APPR.									
TWO PLACE DECIMAL ±.010								P/N:			
THREE PLACE DECIMAL ±.005											
INTERPRET GEOMETRIC		Q.A.									
TOLERANCING PER: ASME Y14.5M		COATING									
MATERIAL								DWG. NO. <div>2013091301</div>			
FINISH		VENDOR:		P/N:							
STOCK:								SCALE: 1:1 WEIGHT: SHEET 1 OF 1			