


ISCP CONNECTOR



During programming and debugging it is recommended that the capacitor be isolated from the MCLR pin. Change this to a push button. Any one of the PGCCx/PGDX pins can be used for programming.

Title		[PD1-2] - MCU Breakout	
Size:	A4	Number:	1
Date:	01-Oct-18	Time:	9:46:19 PM
File:	C:\Users\lhami\Dropbox\University\Capstone\Hardware\PCB\PD1-2\MCU Breakout\PD1-2 - MCU.SchDoc	Sheet	1 of 1
Revision:		A	
*		*	
*		*	
*		*	

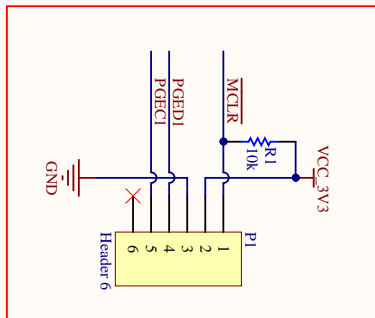

