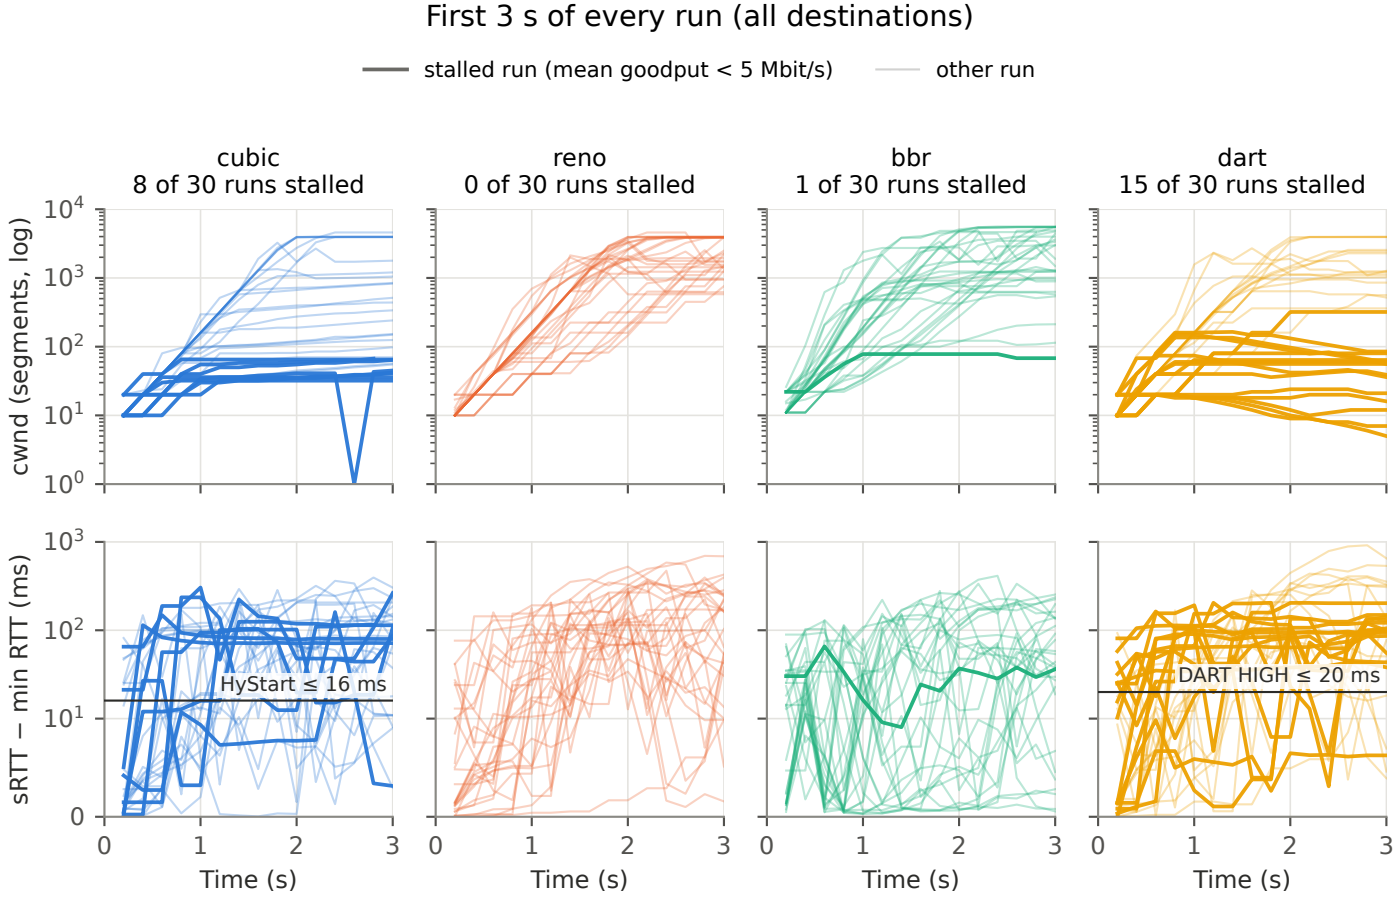
First 3 s of every run (all destinations)
stalled run (mean goodput < 5 Mbit/s)
other run
cubic
8 of 30 runs stalled
reno
0 of 30 runs stalled
bbr
1 of 30 runs stalled
dart
15 of 30 runs stalled
cwnd (segments, log)
sRTT − min RTT (ms)
HyStart ≤ 16 ms
DART HIGH ≤ 20 ms
Time (s)