

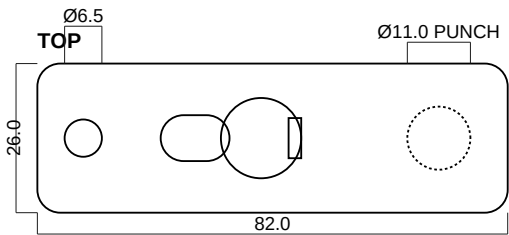



ISOMETRIC (REF)



FRONT



RIGHT



10. UPLOAD THIS PDF + THE STEP TO XOMETRY AND eMACHINESHOP. FOUNDER SENDS RFQ — NO INVENTED QUOTES.
9. THIS IS A BEVERAGE ACCESSORY. NOT A WEAPON. 21+ USE ONLY AFTER PRODUCT-LIABILITY COVER.
8. DO NOT ADD TUBE / STRAW / DRINKING-CHANNEL FEATURES (PRIOR ART / LIABILITY).
7. OPTIONAL 2nd OP: LASER MARK "SIDESHOT" + "21+" ON TOP FACE. NOT IN SOLID.
6. FIRST ARTICLE AS-MACHINED. PRODUCTION: TYPE II CLASS 2 BLACK ANODIZE (QUOTE BOTH).
5. BOTTLE OPENER: Ø14 WINDOW + 2.2 HOOK LIP FOR CROWN CAP. TAB LIFTER: 14 WEDGE TO 1.60 TIP.
4. PUNCH CREATES ~Ø11 CLEAN ROUND HOLE IN 12 oz ALUMINUM CAN WALL (0.10 mm TYP).
3. PUNCH TIP Ø2.50 WITH R0.50 MIN — CONTROLLED BLUNT. DO NOT SHARPEN TO A NEEDLE.
2. BREAK SHARP EDGES 0.2–0.4 EXCEPT PUNCH TIP AND OPENER HOOK WORKING EDGES.
1. INTERPRET PER ASME Y14.5-2018. SINGLE SOLID. NO THREADS. NO BENDS.

SIDESHOT BEER CO. | PHASE 1 TOOL | SMI-153

SAFESHOT MULTI-TOOL

P/N SS-001 REV A0 2026-08-27

MATERIAL: 6061-T6 Aluminum UNITS: MILLIMETRES THIRD ANGLE

QTY (QUOTE)

50 + bid 200

FINISH

AS-MACHINED / Type II black

PROCESS

CNC MILL

DEFAULT TOL

±0.13 (ISO 2768-m)