



Battery Management System: TinyML Live Demo

Watch the model train live, compress itself for microcontrollers, and evaluate telemetry in real-time.

Phase 1: Live Training & Export Phase 2: Industrial Evaluation Phase 3: Live Sensor Stream

1. Live Quantization-Aware Training (QAT)


Max Epochs

100

- +

Start Live Training

Epoch: 46/100 | Train Loss: 0.0045 | Val Loss: 0.0051

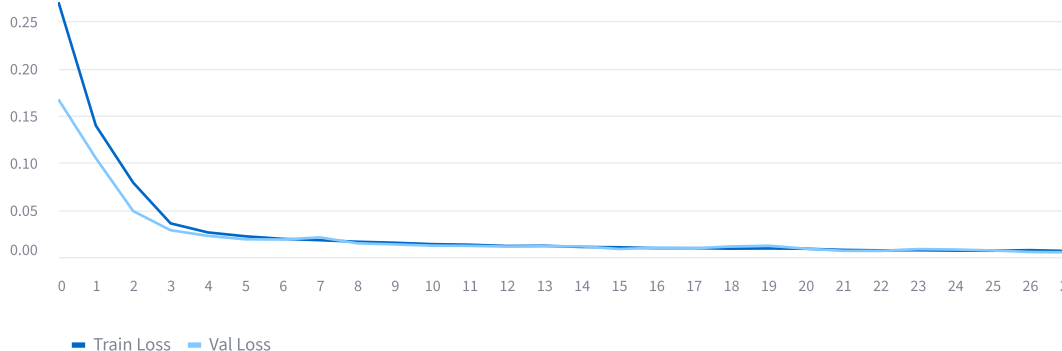

Training & Embedded Compilation Complete!



TFLite Compression Footprint

Original TF32 Size

343.21 KB

Quantized TFLite (INT8)

4.21 KB

Fits in MCU Cache!

Total Model Compression

98.77 %

Size Slashed



Exported Embedded Files

Note: The text-encoded sizes (`.h` and `.hex`) are larger on disk because they store data as human-readable hex characters. However, when compiled, only the raw binary payload (`4.21 KB`) is burned into your MCU's Flash RAM.

Raw .tflite Binary

4.21 KB

C++ Header (.h)

26.55 KB

Intel HEX (.hex)

11.86 KB

Download .tflite

Download .h

Download .hex